

Product features:

- Metal & ABS construction
- Thermostatic valve for safety & comfort
- 2 exit independent control for output to 2 x shower or 1 x shower & 1 x bath
- A modern design classic style
- 5 year limited warranty

Packaged properties:


Box length (mm): 3.9 Box depth(mm): 170
Box width(mm): 255 Boxed weight (Kg): 3.6

Includes pop up waste?: No

Additional comments:

Includes 2.5mm allen key, optional removable mesh filters and flow limiters (7 l/min)

Product dimensions:

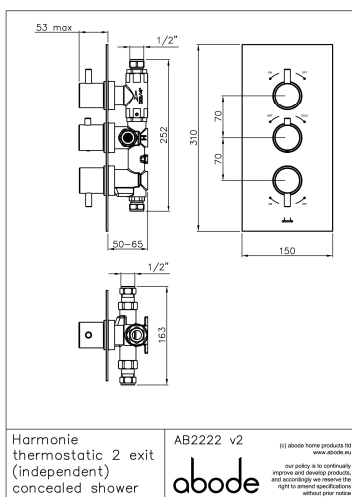


- **Product mounted where:** Wall
- **Recommended hole size:** 200 x 270 mm

- **Overall Height / projection:** 53 mm
- **Exit reach:** N/A mm
- **Exit height:** N/A mm
- **Base size:** 150 x 310 mm

- **Inlet centre distance(s):** N/A mm

- **Min. fitting depth required:** 50-65 mm
- **Max. surface depth:** N/A mm

Product flow characteristics:

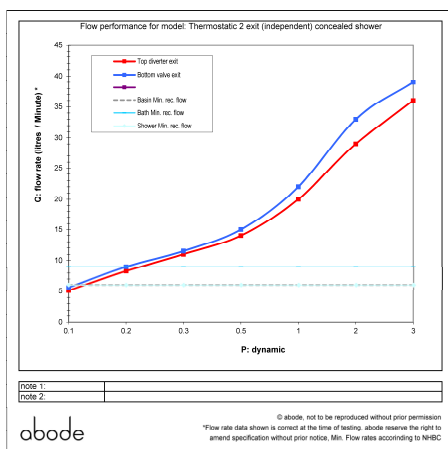

- **Min / Max water pressure (bar):** 0.20* / 5.00
- **Part G max. mixed flow rate at 3 bar (l/m):** 39
- **Inlet connection type / length:** Fixed / N/A mm
- **Inlet (plumbing connection) / outlet size:** 1/2" M / 1/2" M
- **Product flow characteristics:** N/A
- **Non return valve(s) supplied or position:** h&c inlet
- **Aerator type:** N/A
- **Control valve type:** Thermostatic (new plastic type)
- **Includes output diverter?:** No
- **Inlet meshed particle filters included:** 0.6 (3/4" gasket)
- **Shower hose type / length:** N/A / N/A

Warranty Summary (full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year

Care instructions:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of liquid soaps, shampoos and shower foams can also cause damage, so rinse with clean water after using, avoid contact with any abrasives