


Plinth and Fascia Installation Instructions



5 YEAR GUARANTEE

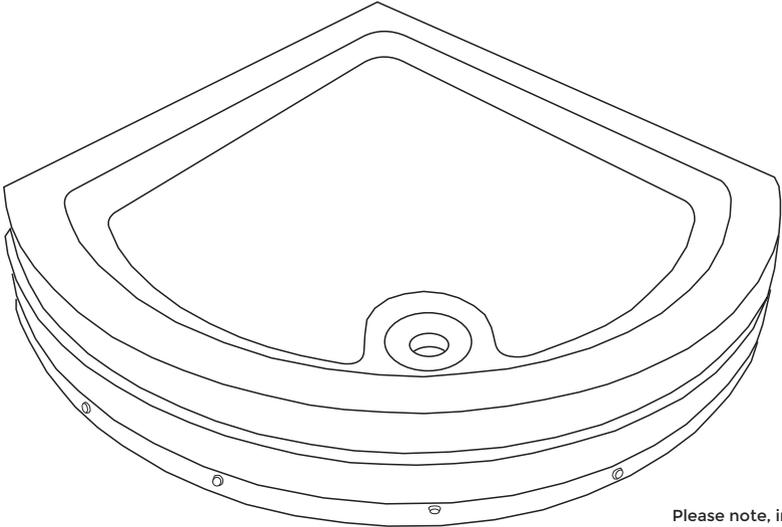

Please note, images are
for illustration
purposes only

384859 / 772997
772998 / 578929

Important

- Unpack and check the product is complete and undamaged.
- Any defects must be reported to your point of purchase before assembly/installation and before disposal of packaging.
- Claims for imperfections will only be accepted prior to assembly/installation.
- Ensure that the floor the plinth is to be mounted onto is solid with no movement.


Safety

- When drilling wall or floors, check first for hidden pipes and cables.
- Use safety eyewear when drilling.
- Keep small parts away from children.

Tools Required


- Pozi-head screwdriver
- Flat head screwdriver
- Power drill
- 5mm drill bit
- Fine toothed saw
- Tape measure
- Pencil
- Spirit level

Fixings & Fittings Supplied


M8 Lock nuts		
910 / 1000 Qty x6	1200 OS Qty x7	
M6 x 20 Screws		
910 / 1000 Qty x6	1200 OS Qty x7	
18mm Washers		
910 / 1000 Qty x6	1200 OS Qty x7	
6 x 60 CSK Screws		
Qty x10		
Plinth Legs		
910 / 1000 Qty x6	1200 OS Qty x7	
L Shaped Blocks		
Qty x5		

Cleaning


We recommend the use of warm soapy water or a mild detergent on a regular basis, do not use harsh abrasives as these can damage the product surfaces




1
Position the tray into place tight against the walls. Using the tray as a template, mark the position of the waste hole and front perimeter for the fascia panel. We advise waste hole be positioned at front for easy access.




2
Position baseboard so that it is equally spaced between the walls and the front perimeter line. Ensure waste hole sits over the template drawn on the floor and mark the position of the plinth feet (through the 45mm dia. holes).




3
Remove baseboard ensuring all lines are clearly visible.




4
Fit floor mounted 'L' shaped blocks to perimeter line using appropriate fixings for your floor construction. The block needs to be set back from the line as shown, with the outermost edge reaching to the perimeter line drawn.




5
Attach adjustable feet, with locknut placed half-way down leg. Set height from floor to top of frame to 92mm (110mm with board). This allows enough space for the moulded fascia, which measures approximately 107mm in height.




6
Check level and that correct height is set. Adjust legs if necessary before tightening locknuts to secure. Fix feet to floor using appropriate fixings for your floor construction.



7
Position trap to markings and connect waste pipe.




8
Fix baseboard to plinth using the engineering screws and washers provided.



9
Install tray according to tray installation instructions. The tray may overhang the board slightly. Connect waste to trap following the instructions supplied for this.

Fitting the moulded fascia



The showertray needs to be set to 110mm, giving 3-4mm allowance for the moulded panel. Panels are unhandsoed so will require trimming with a fine tooth saw. 5mm diameter pilot holes need to be drilled in facing edge of Plinth Baseboard above 'L' shaped blocks and Nylon Adjusting Screws positioned to help support top of moulded panel. Secure panel in place with 20mm screws and cover caps provided (a 4mm hole may be needed for the screw in the 'L' shaped blocks).

We have taken great care to ensure that this product reaches you in good condition. However, should any parts be damaged or missing, please contact your point of purchase. This does not affect your statutory rights. In addition, if you require replacement parts, your point of purchase will be happy to assist.