

New ball impact safe systems

Notes on installation:

Knauf has re-tested according to the latest revision of standard DIN 18032-3:2018-11.

For all perforation designs without plaster layer a **furring channel spacing of 200 mm** is required as a result of the evaluation criteria.

If you have any questions we will gladly support you

Knauf Cleaneo Acoustic Board Ceilings

Cleaneo Classic

D127.de – Knauf Cleaneo Acoustic Board Ceiling

D124.de – Knauf Cleaneo Acoustic Fire Protection Ceiling

D126U.de – Knauf Cleaneo Acoustic Board Ceiling UFF for Acoustical Plaster

D137.de – Knauf Free-Spanning Cleaneo Acoustic Board Ceiling

D134.de – Knauf Free-Spanning Cleaneo Acoustic Fire Protection Ceiling

Note on English translation / Hinweise zur englischen Fassung

This is a translation of the system data sheet valid in Germany.

All stated details and properties are in compliance with the regulations of the German standards and building regulations. They are only applicable for the specified products, system components, application rules, and construction details in connection with the specifications of the respective certificates and approvals.

Knauf Gips KG denies any liability for applications outside of Germany as this requires changes acc. to the respective national standards and building regulations.

Dies ist eine Übersetzung des in Deutschland gültigen Detailblattes. Alle angegebenen Werte und Eigenschaften entsprechen den in Deutschland gültigen Normen und bauaufsichtlichen Regelungen. Sie gelten nur bei Verwendung der angegebenen Produkte, Systemkomponenten, Anwendungsregeln und Konstruktionsdetails in Verbindung mit den Vorgaben der bauaufsichtlichen Nachweise.

Die Knauf Gips KG lehnt jegliche Haftung für Einsatz und Anwendung außerhalb Deutschlands ab, da in diesem Fall eine Anpassung an nationale Normen und bauaufsichtliche Regelungen notwendig ist.

Contents

Introduction	
Usage instructions General instructions	4
Usage instructions	4
Notes on the document	4
References to other documents	4
Intended use of Knauf Systems	4
General instructions	4
Rating principles Certificates of Usability	5
System overview	6
<hr/>	
Data for planning	
D127.de Cleaneo Acoustic Board Ceiling	8
D124.de Cleaneo Acoustic Fire Protection Ceiling	10
D126U.de Cleaneo Acoustic Board Ceilings UFF for Acoustical Plaster	12
D137.de Free-Spanning Cleaneo Acoustic Board Ceiling	14
D134.de Free-Spanning Cleaneo Acoustic Fire Protection Ceiling	16
Edge designs	18
Board design	21
Ball impact safety	29
Airborne and impact sound insulation	30
Sound absorption – Fundamentals	34
D127.de Sound absorption	37
D124.de Sound absorption	48
D126U.de Sound absorption	50
D134.de Sound absorption	52
D134.de/D137.de Sound absorption	53
Suspenders	54
Construction heights – suspended ceilings	56
Planning of joints	58
Anchoring of loads	59
<hr/>	
Construction details	
D127.de Cleaneo Acoustic Board Ceiling	60
D124.de Cleaneo Acoustic Fire Protection Ceilings	64
D126U.de Cleaneo Acoustic Board Ceiling UFF for Acoustical Plaster	66
D137.de Free-Spanning Cleaneo Acoustic Board Ceiling	68
D134.de Free-Spanning Cleaneo Acoustic Fire Protection Ceiling	69
Special details	70
<hr/>	
Special details	
Multi-Level Ceiling System	74

	Installation and application	
	Grid – suspended ceilings	75
	Grid – free-spanning ceiling	76
	Insulation layer	78
	Top side covering layer Cladding	79
	Cladding	80
	Jointing	82
	Coatings and linings	83
	Material requirement	
	Cleaneo Acoustic board ceilings – suspended	84
	Cleaneo Acoustic board ceilings – free-spanning	86
	Information on sustainability	
	Knauf Cleaneo Acoustic Board Ceilings	88

Usage instructions

Notes on the document

Knauf system data sheets are the planning and application basis for the planners and professional installers with the application of Knauf systems. The contained information and specifications, constructions, details and stated products are based, unless otherwise stated, on the certificates of usability (e.g. National Technical Test Certificate (abP) valid at the date they are published as well as on the applicable standards. Additionally, design and structural requirements and those relating to building physics (fire resistance and sound insulation) are considered.

The contained construction details are examples and can be used in a similar way for various cladding variants of the respective system. At the same time, the demands made on fire resistance and/or sound insulation as well as any necessary additional measures and/or limitations must be observed.

References to other documents

- Suspended ceilings with non-perforated cladding, see system data sheet [D11.de Knauf Board Ceilings](#)
- Free-spanning ceilings with non-perforated cladding, see system data sheet [D13.de Knauf Free-Spanning Ceilings](#)
- Acoustic wall systems, see technical brochure [AK04.de Knauf Acoustic Wall Systems](#)
- Room acoustics with Knauf – Fundamentals and concepts, see [Brochure AK01.de](#)
- Room Acoustics with Knauf – Data for planning, see [Brochure AK02.de](#)
- Dropped Ceiling with Lay-in Assembly, see system data sheet [D14.de Knauf Acoustic Dropped Ceilings](#) (German only)
- Free-Spanning Acoustical Plank Ceilings, see system data sheet [D42.de Free-Spanning Acoustical Plank Ceilings](#)
- Installation Instructions [Cleaneo SK – K761S-A01.de](#)
- Installation Instructions [Cleaneo UFF – K761U-A01.de](#)
- Installation Instructions [Cleaneo linear – K761L-A01.de](#)
- Product data sheet [K533.de Knauf Cleaneo Caps](#)
- Observe the product data sheets of the Knauf system components.

Symbols in the system data sheet

The following symbols are used in this document:

Insulation layers

- Ⓢ Mineral wool insulation layer acc. to EN 13162 non-combustible
melting point ≥ 1000 °C acc. to DIN 4102-17
(insulating material, e.g. from Knauf Insulation)

Stud frame spacings

- ⓐ Spacing of suspenders/anchors
- ⓑ Axial spacing furring channel/hat-shaped channel (cladding span width)
- ⓒ Axial spacing carrying channel (spacing furring channel)

Intended use of Knauf Systems

Please observe the following:

Caution	Knauf systems may only be used for the application cases as stated in the Knauf documentation. In case third-party products or components are used, they must be recommended or approved by Knauf. Flawless application of products / systems assumes proper transport, storage, assembly, installation and maintenance.
----------------	--

General instructions

Term definitions

Suspended ceilings

Cleaneo Acoustic board ceilings can be applied as ceiling linings or suspended ceilings. The following definition applied acc. to DIN 18168: Ceiling linings and suspended ceilings are: "... ceilings of even or other design with smooth, perforated or jointed surface consisting of a substructure and a surface layer forming the area. In the case of ceiling linings, the substructure is anchored directly to the load-bearing building component; in the case of underceilings the substructure is suspended. ...".

Free-spanning ceilings


Knauf free-spanning ceilings are sub-ceilings without suspension. The connection of the ceiling described as "free-spanning" is the support for the freely-supporting profiles, implemented as UW perimeter runners or UA profiles using connection brackets. The connection described as "constructional" is the perimeter connection to the freely-spanning profiles.

Field of application

The data specified in this system data sheet only applies for ceiling linings / suspended ceilings in interiors.

Fire resistance effect

If the fire resistance effect from the classification of Cleaneo Acoustic board ceiling is achieved without involvement or consideration of the basic ceiling, the fire resistance is referred to as solely. This is relevant in particular when the plenum is to be protected against the exposure to fire from the room (fire resistance solely from below) or a protective effect for the room against fire exposure in the plenum (fire resistance solely from above). A combination of both requirements may be necessary depending on the requirements stipulated by the building inspectorate and/or fire resistance concept. Even technical fire resistance non-classified ceiling systems classified by a "solely from below" ceiling lining/sub-ceiling for fire resistance requirements can be protected to withstand exposure to fire from the bottom of the ceiling.

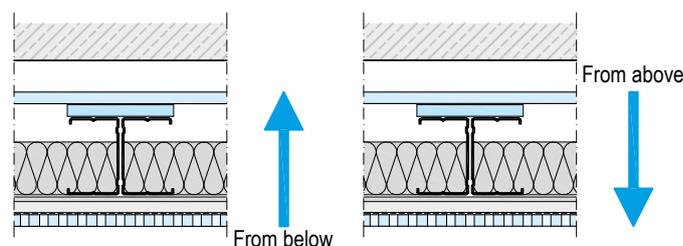

Air-cleaning effect

Knauf Cleaneo Classic are perforated or slotted gypsum boards compliant to EN 14190 with air-cleaning effect due to the addition of dehydrated zeolite.

Information on further Cleaneo Classic boards

Cleaneo Thermoboard (Plus)

Cleaneo Thermoboard (Plus) is applied in the cooling and heating ceiling system field. No specifications regarding sound absorption can be made due to the diverse range of grid systems used by manufacturers of the heating/cooling systems.

Dimensioning principles

To read off the required spacings for the grid, it is first of all necessary to determine the load class taking into consideration the self-weight of the selected system variant including any existing or planned additional loads.

Example: D127.de – Cleaneo Acoustic Board Ceilings without fire resistance

Step 1:

Determination of the rated weight

The rated weight (cladding with grid) of the suspended ceiling/ceiling lining can be read off from the Knauf system tables in dependence on the selected cladding thickness (system variants).

Fire resistance class		Cladding (lateral application)		Min. thickness mm	Rated weight Without insulation layer kg/m ²	Furring channel Maximum spacings (b) mm
For fire exposure		Cleaneo Classic	Designpanel			
From below	From above					
D127.de Cleaneo Acoustic Board Ceilings...						
-	-	•		12.5	12.0	333.5

Note Rated weights with larger board thicknesses and/or other board types on request.

Step 2:

Consideration of additional loads

Additional loads, e.g. consisting of fire resistance necessary and unnecessary insulation materials, as well as planned fixing loads (see also page 59), increase the total area weight of the ceiling lining / suspended ceiling and must be considered with the rating of the load class. (Rated weight + weight of additional loads = total area weight)


Example additional load: 20 mm insulation material = 0.6 kg/m²

Step 3:

Determination of the load class

Based on the total area load of the ceiling lining/suspended ceiling, the corresponding load class (kN/m²) is to be determined from the load class diagram.

Determination of the load class

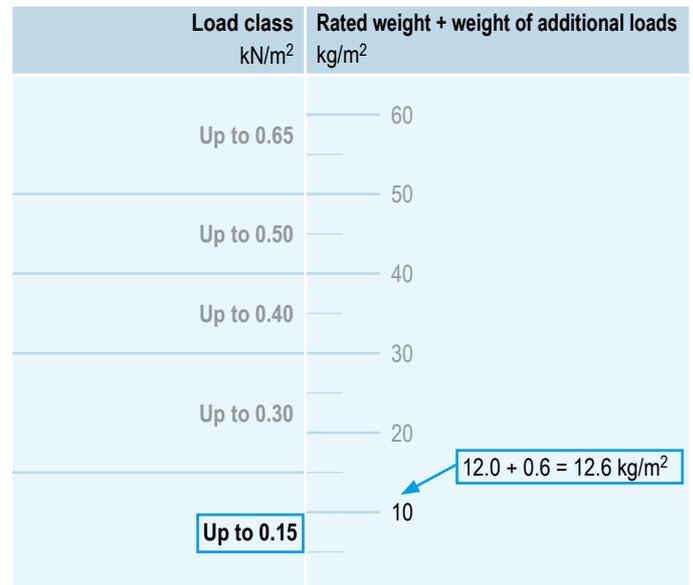

The self-weight of the ceiling may not exceed 0.50 kN/m². The load class up to 0.65 kN/m² may only be used in combination with additional loads, e.g. multi-level ceiling system. Rated value acc. to DIN 18168-1.

Step 4:

Dimensioning of the grid

Using the determined load class, the maximum permissible spacings of the suspenders (a) as well as the profiles (b) and (c) can be read off in the tables "System variants" and "Maximum grid spacing" of the systems in dependence on the fire resistance requirements and selected grid.

Axial spacings Carrying channel (c)	Suspender spacings (a)	
	Load class in kN/m ²	
	Up to 0.15	Up to 0.30
500	1200	950
600	1150	900
700	1100	850

Proof of Usability

Knauf System	Fire resistance	Sound insulation Airborne and impact sound	Sound absorption
D127.de	-	T017-07.17	
D124.de	AbP P-2100/199/15-MPA BS	-	A 013-04.16
D126U.de	-	-	A 017-05.19
D137.de	-	-	
D134.de	AbP P-SAC-02/III-510	-	A 013-04.16

The stated constructional and structural properties, and characteristic building physics of Knauf systems can solely be ensured with the exclusive use of Knauf system components, or other products expressly recommended by Knauf. The validity and up-to-datedness of the stated proofs have to be considered.

Notes on fire resistance


The specifications marked with **plus** offer additional application options, which are not directly included in the Proof of Usability. On the basis of our technical assessments, we assume that these marked design solutions can be assessed as a non-significant divergence. On request, we can make the documentation on which this assessment is based, such as experts opinions or technical assessments, available to you together with the Proofs of Usability. We recommend that a non-significant divergence be coordinated and authorised in advance in consultation between the persons responsible for fire resistance and/or the relevant authorities.

Cleaneo acoustic board ceilings

Cleaneo Acoustic Board Ceilings consist of a suspended or directly anchored or free spanning grid clad with Cleaneo Classic boards. Various board designs are available to satisfy the respective acoustical and visual requirements.

D127.de Cleaneo Acoustic Board Ceilings

Without fire resistance

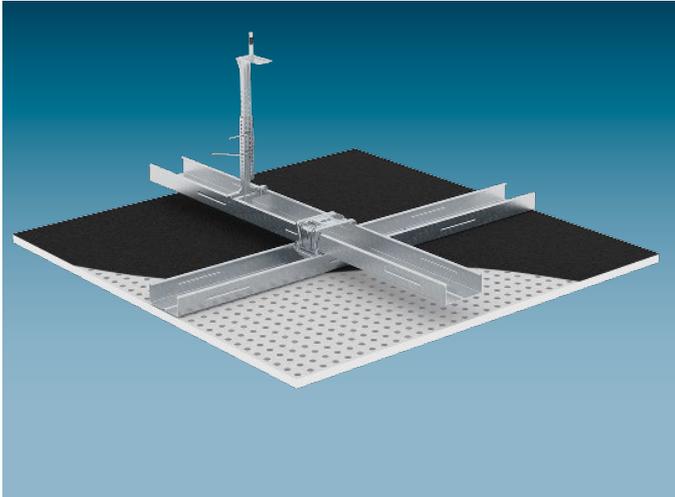


Cleaneo Classic boards are fixed with screws to a metal grid of carrying and furring channels (double-layer profile) made of sheet metal profiles CD 60/27. Anchoring of the CD channels is undertaken with suspenders on the basic ceiling.

An insulation layer of at least 20 mm thickness can be placed on the furring channels for the purpose of sound absorption.

D124.de Cleaneo Acoustic Fire Protection Ceiling

Fire resistance F30 – solely from below

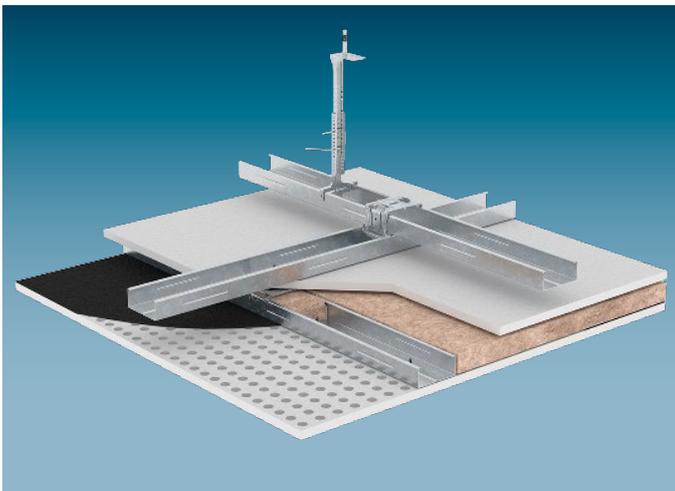

The system consists of two effective levels for fire resistance and acoustics. Knauf Piano fire-resistant boards are fixed with screws to a metal grid of carrying and furring channels (double-layer profile) made of sheet metal profiles CD 60/27 for the upper fire protection effective layer. Anchoring of the CD channels is undertaken with suspenders on the basic ceiling.

Cleaneo Classic boards are fixed with screws to a metal grid of carrying and furring channels (double profile grid) or furring channels (single profile grid) made of sheet metal profiles CD 60/27 for the bottom acoustically effective layer. Anchoring of the CD channels is undertaken with Universal Brackets (double profile grid) or Direct Brackets (single profile grid) on the upper level. An obligatory fire protection acoustically effective insulation layer is arranged in the space between the upper and lower levels.

D126U.de Cleaneo Acoustic Board Ceilings UFF for acoustical plaster

Without fire resistance



Cleaneo UFF plaster base boards with fleece or foil lamination on the rear side are screw fastened to a metal grid of carrying and furring channels (double-layer profiles) made of sheet metal profiles CD 60/27. Anchoring of the CD channels is undertaken with suspenders on the basic ceiling. An acoustically effective insulation layer can be laid upon the furring channels.

The connection to wall is implemented with fleece lamination with shadow gap.

The final coating is applied using KRAFT acoustical plaster Picco S or fumi Akustikputz S1 acoustical plaster.

D137.de Free-Spanning Cleaneo Acoustic Board Ceilings
 Without fire resistance



Cleaneo Classic boards are fixed with screws to a metal grid of carrying channels made of single or double profiles types CW or UA as well as furring channels made from hat-shaped channels. The carrying channels are anchored only to the flanking walls.
 An acoustically effective insulation layer can be laid between the carrying channels (upon the furring channels).

D134.de Free-Spanning Cleaneo Acoustic Fire Protection Ceiling
 Fire protection F30 – solely from below and from above



Cleaneo Classic boards are fixed with screws to a metal grid of carrying channels made of double profiles types CW or UA with covering strips as well as furring channels made from hat-shaped channels. The carrying channels are anchored only to the flanking walls.
 A board layer required for fire protection reasons is laid as a covering on the carrying channels and consists of Knauf Piano fire-resistant board.
 An obligatory fire protection acoustically effective insulation layer is arranged between the carrying channels (on the furring channels).

D127.de

D124.de

D126C.de

D137.de

D134.de

System variants

Cleaneo Acoustic Board Ceilings without fire resistance

	Fire resistance class		Cladding (lateral application)		Min. thickness mm	Rated weight Without insulation layer kg/m ²	Furring channel Maximum spacings (b) mm	Insulation layer	
	For fire exposure		Cleaneo Classic	Designpanel				Required for fire resistance	
	From below	From above						Minimum thickness mm	Minimum density kg/m ³
D127.de Cleaneo Acoustic Board Ceiling									
	-	-	•		12.5	12.0	333.5		
				•	12.5	12.0	300		

Maximum spacings of the furring channels (b) in dependence on the design and perforation – see section “Board design”.


Determination of the load class

Load class kN/m ²	Rated weight + weight of additional loads kg/m ²
Up to 0.65	60
Up to 0.50	50
Up to 0.40	40
Up to 0.30	30
Up to 0.20	20
Up to 0.15	10

Note Observe the notes on page 4.

Maximum grid spacings

Dimensions in mm

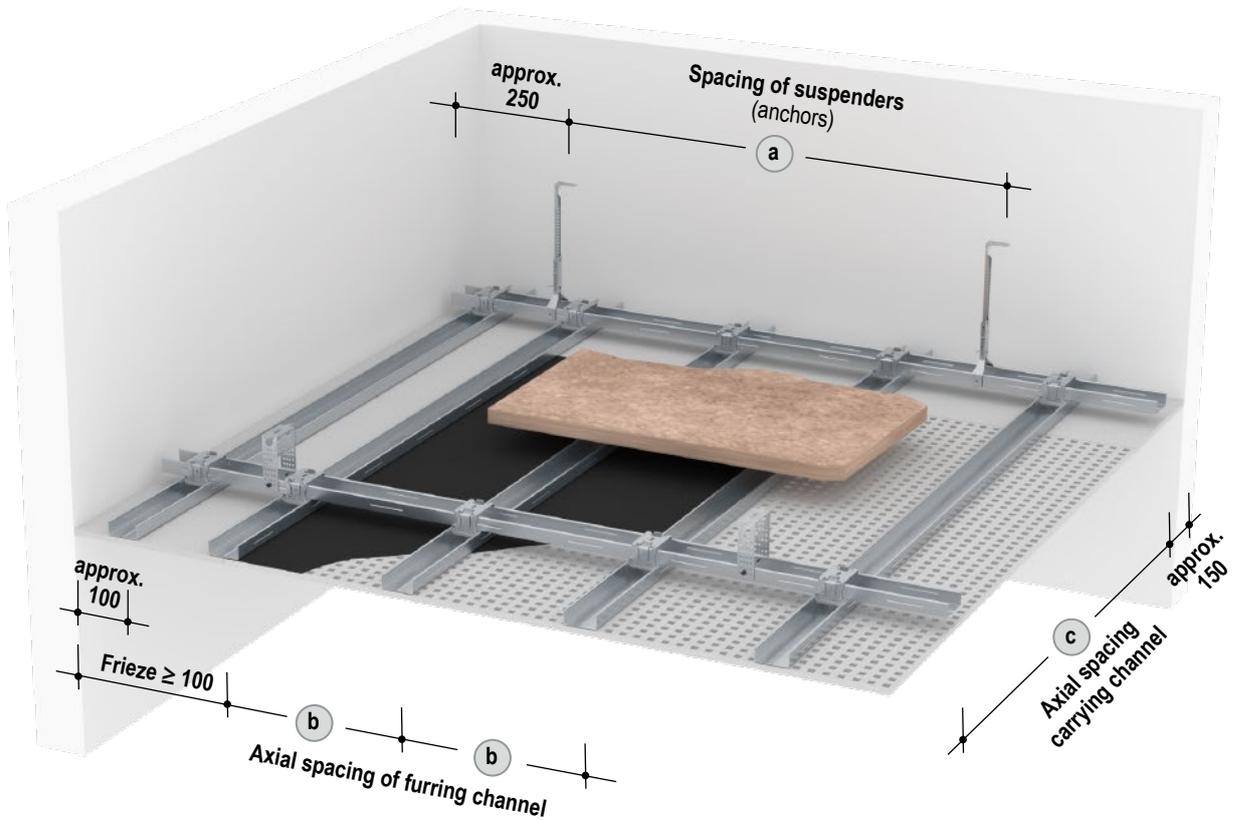



Axial spacings Carrying channel c	Suspender spacings a	
	Load class in kN/m ²	
	Up to 0.15	Up to 0.30
500	1200	950
600	1150	900
700	1100	850
800	1050	800
900	1000	800
1000	950	750
1100	900	750
1200	900	-

Note

Customized dimensioning of the ceiling substructure is possible on request.

System variants

Cleaneo Acoustic Fire Protection Ceilings – fire resistance solely from below

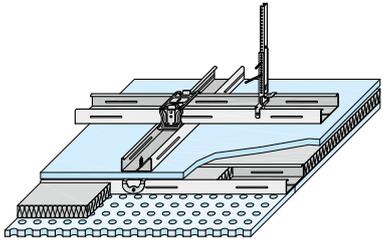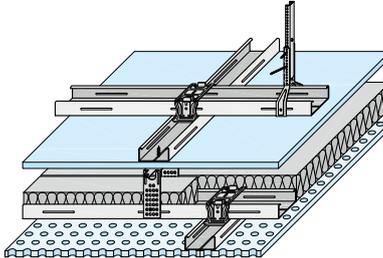Requirements on the basic ceiling with fire exposure	Fire resistance class		1 Grid level Cladding (lateral application)		2 Grid level Cladding (lateral application)		Insulation layer	
	From below	From above	Knauf Piano fire-resistant board	Minimum thickness mm	Cleaneo Classic Designpanel	Minimum thickness mm	Minimum thickness mm	Minimum density kg/m ³
From below No fire resistance requirements for basic ceiling/roof construction								Required for fire resistance
D124.de Cleaneo Acoustic Fire Protection Ceiling								
 2nd grid level Furring channels only – Direct Bracket	F30	–	•	12.5	•	12.5	Knauf Insulation Trittschall-Dämmplatte TPE 25	–
					•	12.5		
 2nd grid level Carrying and furring channel – Universal Brackets	F30	–	•	12.5	•	12.5	Mineral wool S 50 50	
					•	12.5		

2nd grid level - maximum furring channel spacings **b**

Cleaneo Classic ≤ 333.5 mm

Designpanel ≤ 300 mm

Dependent on the design and perforation – see section “Board design”.

Fire resistance permissible suspenders of the 2nd grid level

- Direct Bracket
- Universal Bracket / Damping Universal Bracket

plus Extension of the fire resistance Proof of Usability

- Based on the system D124.de variants

Prior consultation in acc. to page 5 is recommended.


Notes

2nd grid level: Only cladding with perforation ratio ≤ 23.0 % permissible.

Observe the notes on page 4.

Maximum grid spacings

Dimensions in mm

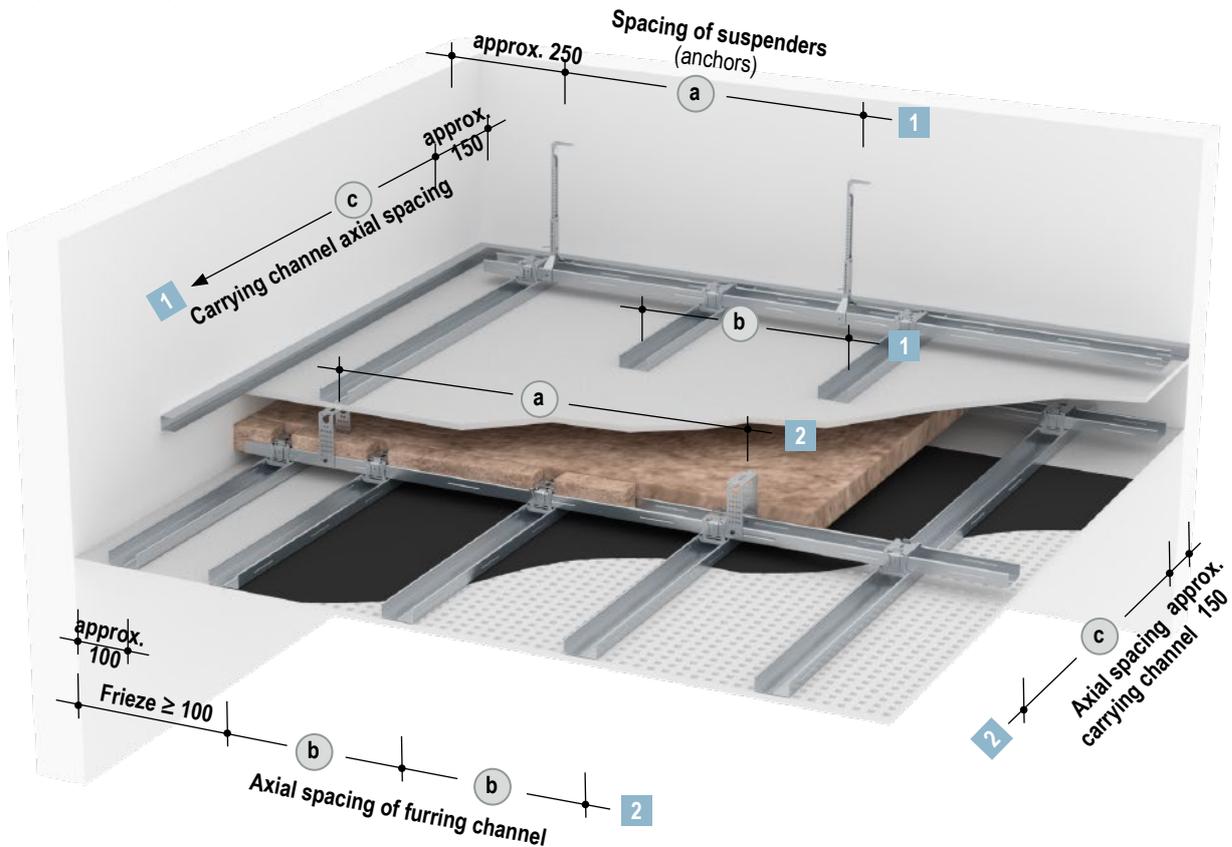

1 Grid level

Axial spacing carrying channel c	Spacing of suspender a	Axial spacing furring channel b
Carrying and furring channel		
1000	650	400

For further details on the 1st grid level see system data sheet D11.de Knauf Board Ceilings

2 Grid level ($\leq 0.15 \text{ kN/m}^2$)

Axial spacing carrying channel c	Spacing of suspender a	Axial spacings furring channel b
Furring channels only – Direct bracket		
–	800	≤ 333.5
Carrying and furring channel - Universal Brackets		
800	800	≤ 333.5

Always arrange suspended profiles of the 2nd grid level lateral to furring channels of the 1st grid level.

Attach fixing alternately to every second furring channel of the 1st grid level with Knauf multi-purpose screw FN 4.3 x 35.

For each anchoring point of the 2nd grid level the maximum load is 100 N (approx. 10 kg).

Maximum spacings of the furring channels in dependence on the design and perforation – see section “Board design”.

plus Extension of the fire resistance Proof of Usability
 ■ Based on the system D124.de variants
 Prior consultation in acc. to page 5 is recommended.

System variants

Cleaneo Acoustic Board Ceilings UFF for Acoustical Plaster – without fire resistance

	Fire resistance class		Cladding (lateral application)		Rated weight	Furring channel	Insulation layer	
	For fire exposure		Cleaneo UFF plaster base board	Minimum thickness mm			Without insulation layer kg/m ²	Maximum axial spacing mm (b)
	From below	From above			Minimum thickness mm	Minimum density kg/m ³		

D126U.de Cleaneo Acoustic Board Ceiling UFF for Acoustical Plaster

	-	-	•	12.5	12.7 (incl. 3 kg/m ² plaster)	400		
--	---	---	---	------	---	-----	--	--

Plaster system		Graining	Coating layer configuration	Manufacturers' supply address	Design
fumi Akustikputz	S1	0.1 to 0.3 mm	<ul style="list-style-type: none"> ■ Sperrgrund barrier coating ■ Adhesive ■ Plaster base fleece ■ Multi-layer coating 	Schmidt Akustik GmbH Beethovenstraße 7 67307 Göllheim Telephone: +49 6351 98 98 798 E-Mail: info@akustikputz.de www.akustikputz.de	Fleece or foil lamination
KRAFT acoustical plaster	Picco S	0.3 to 0.5 mm	<ul style="list-style-type: none"> ■ Isoliergrund primer ■ Adhesive ■ Plaster base fleece ■ Multi-layer coating 	KRAFT Akustik-Systeme Sonnenhof 4 35440 Linden Telephone: +49 6403 940 608 E-Mail: info@kraft-akustiksysteme.de www.kraft-akustiksysteme.de	Fleece or foil lamination


Determination of the load class

Load class kN/m ²	Rated weight + weight of additional loads kg/m ²
Up to 0.65	60
Up to 0.50	50
Up to 0.40	40
Up to 0.30	30
Up to 0.20	20
Up to 0.15	10

Note Observe the notes on page 4.

Maximum grid spacings

Dimensions in mm

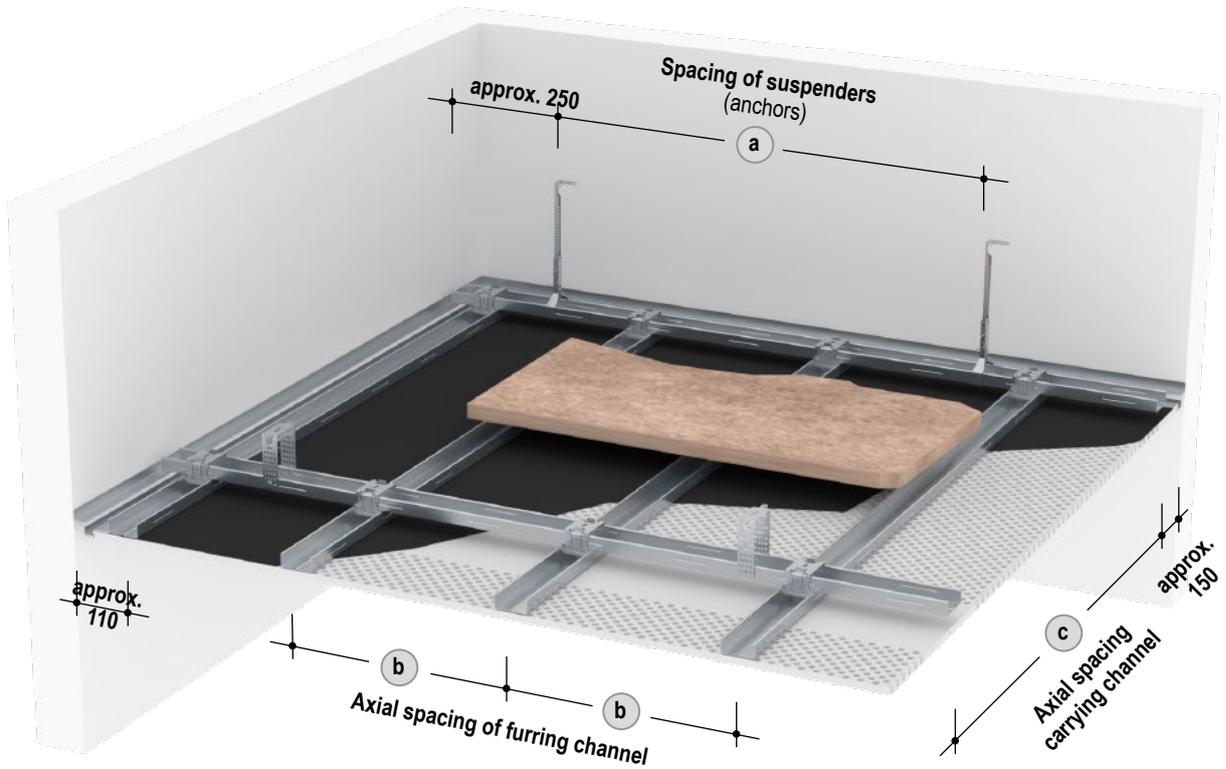

Axial spacings carrying channel c	Suspender spacings a	
	Load class in kN/m ²	
	Up to 0.15	Up to 0.30
500	1200	950
600	1150	900
700	1100	850
800	1050	800
900	1000	800
1000	950	750
1100	900	750
1200	900	-

Note

Customized dimensioning of the ceiling substructure is possible on request.

System variants


Free-Spanning Cleaneo Acoustic Board Ceilings without fire resistance

	Fire resistance class		Cladding (lateral application)		Minimum thickness mm	Carrying channel CW-/UA- single / double profile Maximum spacings c mm	Furring channel Hat-shaped channel 98/15 Maximum spacings b mm	Insulation layer		
	For fire exposure		Cleaneo Classic	Designpanel				Required for fire resistance	Minimum thickness mm	Minimum density kg/m ³
	From below	From above								
D137.de Free-Spanning Cleaneo Acoustic Board Ceiling										
	-	-	•		12.5	625	333.5			
				•	12.5	625	300			

Maximum spacings of the furring channels **b** in dependence on the design and perforation – see section “Board design”.

Note Observe the notes on page 4.

Maximum room widths / grid spacings

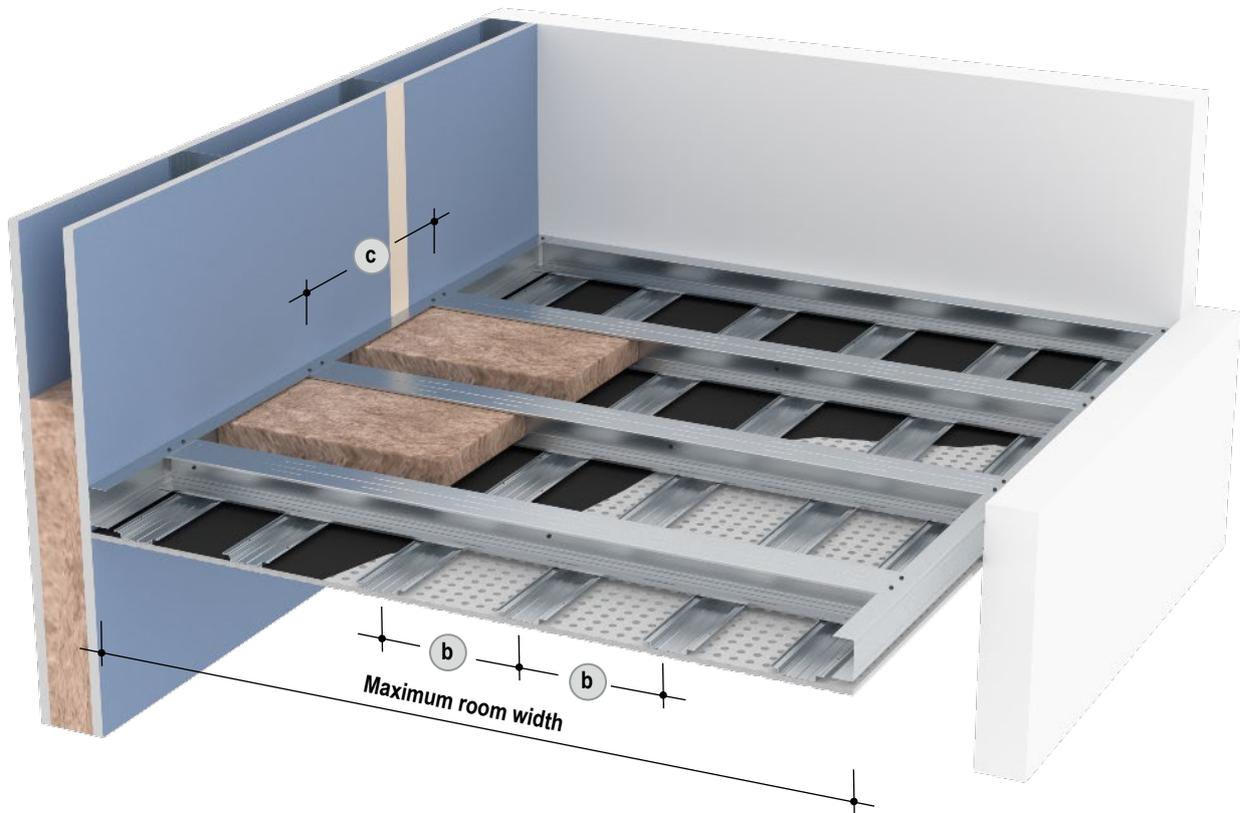

Profile	Maximum room widths ¹⁾	
	Carrying channel spacings c	
	500 mm m	625 mm m
CW single profile metal gauge 0.6 mm		
CW 50	2.05	1.95
CW 75	2.55	2.45
CW 100	3.00	2.85
CW 125	3.40	3.25
CW 150	3.75	3.60
UA single profile metal gauge 2.0 mm		
UA 50	2.45	2.35
UA 75	3.05	2.90
UA 100	3.60	3.45
UA 125	4.05	3.90
UA 150	4.50	4.35

CW profile / UA profile as carrying channel	UW perimeter runner on connection to wall load bearing
(2x) CW/UA 50	→ UW 50
(2x) CW/UA 75	→ UW 75
(2x) CW/UA 100	→ UW 100
(2x) CW/UA 125	→ UW 125
(2x) CW/UA 150	→ UW 150

Profile	Maximum room widths ¹⁾	
	Carrying channel spacings c	
	500 mm m	625 mm m
CW double profile metal gauge 0.6 mm		
2x CW 50	2.40	2.25
2x CW 75	2.95	2.85
2x CW 100	3.45	3.30
2x CW 125	3.90	3.75
2x CW 150	4.35	4.15
UA double profile metal gauge 2.0 mm		
2x UA 50	2.80	2.65
2x UA 75	3.40	3.30
2x UA 100	4.00	3.90
2x UA 125	4.50	4.40
2x UA 150	5.00	4.85

1) Max. room widths including additional loads (0.03 kN/m² = 3 kg/m²) for insulation layers necessary for acoustical measures and/or fixing loads.

Notes	Larger room widths possible on request.
	Free-spanning ceiling profiles may not be joined or extended (larger room widths possible with centre suspension)

System variants

Free-Spanning Cleaneo Acoustic Fire Protection Ceiling – fire resistance solely from below and from above (plenum)

Requirements on the basic ceiling for fire exposure	Fire resistance class		Cladding (lateral application)			Carrying channel CW /UA double stud profile	Furring channel Hat-Shaped Channel 98/15	Insulation layer	
			Knauf Piano fire-resistant board	Cleaneo Classic	Designpanel			Minimum thickness	Minimum density
From below No fire resistance requirements for basic ceiling/roof construction From above (Plenum) Raw ceiling must have same fire resistance class as the suspended ceiling	For fire exposure				mm	Maximum spacings	Maximum spacings	Minimum thickness	Minimum density
	From below	From above				mm	mm	mm	kg/m ³

D134.de Free-Spanning Cleaneo Acoustic Fire Protection Ceiling

Covering strips 12.5 mm Knauf Piano fire-resistant board 	F30	F30	•	12.5 + 12.5 Additional layer (covering board)	625	333.5	Mineral wool 50 S 50
			•	12.5 + 12.5 Additional layer (covering board)	625	300	

Maximum spacings of the furring channels **b** in dependence on the design and perforation – see section “Board design”.


Permissible connections to wall

Connection	Solid wall (e.g. concrete, reinforced concrete or masonry)	Lightweight partition (metal stud partition)
	Fire resistance class	Fire resistance class plus
Direct		
Load-bearing	≥ F30	≥ F30
Constructional		
Shadow gap		
Load-bearing	≥ F30	≥ F30
Constructional		

plus Extension of the fire resistance Proof of Usability
 ■ With connection to lightweight partitions (metal stud partitions)
 Prior consultation in acc. to page 5 is recommended.

Notes
 Flanking components (walls) should have at least the same fire resistance class.
 Only cladding with perforation ratio ≤ 23.0 % permissible.
 Observe the notes on page 4.

Maximum room widths / grid spacings

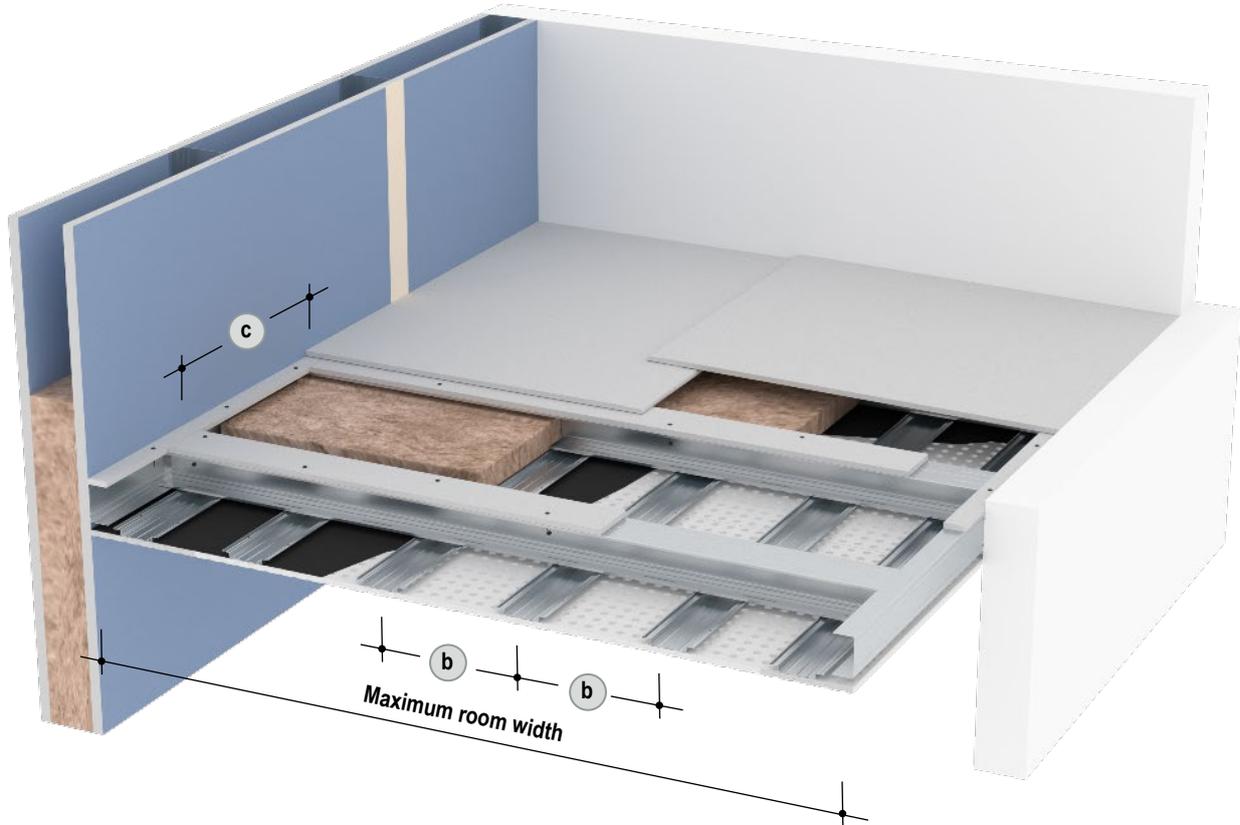

CW profile / UA profile as carrying channel	UW perimeter runner on connection to wall load bearing
2x CW/UA 50	→ UW 50
2x CW/UA 75	→ UW 75
2x CW/UA 100	→ UW 100
2x CW/UA 125	→ UW 125
2x CW/UA 150	→ UW 150

Profile	Maximum room widths ¹⁾ Carrying channel spacings c	
	500 mm m	625 mm m
CW double profile metal gauge 0.6 mm		
2x CW 50	2.05	1.85
2x CW 75	2.60	2.35
2x CW 100 plus	3.00	2.80
2x CW 125	3.40	3.25
2x CW 150	3.80	3.60
UA double profile metal gauge 2.0 mm		
2x UA 50	2.45	2.35
2x UA 75	3.05	2.95
2x UA 100 plus	3.60	3.45
2x UA 125	4.10	3.95
2x UA 150	4.50	4.35

1) Max. room widths including additional loads (0.03 kN/m² = 3 kg/m²) for insulation layers necessary for fire protection and/or acoustical measures and/or fixing loads.





plus Extension of the fire resistance Proof of Usability

- When used with carrying channels CW 50 / 75 / 100 / 125
- When UA carrying channels are used

Prior consultation in acc. to page 5 is recommended.



Cleaneo Classic boards

Scheme drawings

Standard edge types	Face side – boards	Description
Continuous perforation		
<p>4SK 4-sided cut square edge</p> 		<p>Cleaneo SK are perforated gypsum boards with continuous perforation and have a 4-side cut square edge (4SK) as standard. They are applied with a joint of approx. 3 mm that is filled with Uniflott. The edges are marked in red and blue. During installation, always arrange a red board marking to a blue board marking (front and long edges).</p>
<p>UFF surrounding notch joint</p> 		<p>Cleaneo UFF are perforated gypsum boards with continuous perforation. The special edge design of the four-sided UFF edge (surrounding notch joint) enable a simple precise alignment. When applying boards abutting, the precise board dimensions automatically allow for the correct perforation spacing. During installation, always arrange a red board marking to a blue board marking (front and long edges).</p>
<p>linear Circumferential rebated edges</p> 		<p>Cleaneo linear are perforated gypsum boards with continuous perforation and have a circumferential (shiplap) rebated edge (2 edges with notch and 2 edges with lap) for accurate application without joint filling as well as a bright white face paper for direct coating. When applying boards abutting, the precise board dimensions automatically allow for the correct perforation spacing.</p>
<p>4FK 4-sided cut edge square edged and bevelled</p> 		<p>Cleaneo Complete are perforated gypsum boards with an unperforated edge. The special edge design of the four-sided bevelled 4FK edge enable a simple precise alignment. The boards have their own finished printed surface and are applied joint on joint.</p>

Cleaneo Classic boards

Scheme drawings

Standard edge types	Face side – boards	Description
Block perforation		
<p>4SK 4-sided cut square edge</p> 		<p>Cleaneo block perforation are perforated gypsum boards with block perforation and have a 4-side cut square edge (4SK) as standard. They are applied with a joint of approx. 3 mm that is filled with Uniflott.</p> <p>The four-sided tapered edge type (AK) offer the prerequisite for jointing, resulting in a perfect surface with a high level of crack resistance. Jointing on all joints is performed using Uniflott and Knauf Joint Tape Kurt.</p>
<p>4AK 4-sided tapered edge</p> 		<p>Designpanel is a perforated gypsum board with block perforation. The four-sided tapered edge type (AK) offer the prerequisite for jointing, resulting in a perfect surface with a high level of crack resistance.</p> <p>Jointing on all joints is performed using Uniflott and Knauf Joint Tape Kurt.</p>
Block slots		
<p>SFK Front edge - bevelled cut edge</p>  <p>+</p> <p>HRK Half-rounded long edge</p> 	 <p>Other edge types: 4SK 4-sided cut square edge</p>	<p>Cleaneo slotline are perforated gypsum boards with block perforation and feature as standard a half-rounded long edge (HRK) as well as a bevelled cut face edges (SFK). Jointing can be implemented in the same way as with non-perforated boards with the non-perforated edge.</p>

D127.de

D124.de


D126.de

D137.de

D134.de

Cleaneo Classic boards

Scheme drawings

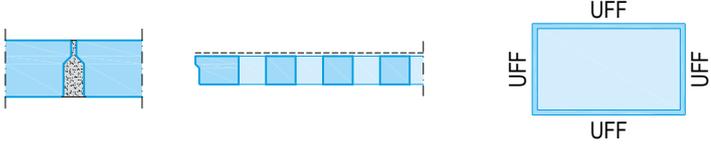Standard edge type	Face side - board	Description
<p>Cleaneo UFF plaster base board – with rear side fleece or foil laminated on the rear</p>		
<p>UFF surrounding notch joint</p>  <p>The special edge design of the four-sided UFF edge (surrounding notch joint) enable a simple precise alignment. When applying boards abutting, the precise board dimensions automatically allow for the correct perforation spacing. During installation, always arrange a red board marking to a blue board marking (front and long edges). Jointing is applied with Uniflott on all edges.</p>		

D127.de

D124.de

D126U.de


D137.de

Cleaneo Classic boards – continuous perforation


Scheme drawings | Face side | Dimensions in mm

Design	Perforation	Perforation ratio (board) %	Board dimensions (standard sizes)		Furring channel Maximum spacings b mm	Edge designs		
			Width mm	Length mm		4SK	UFF	linear
Standard circular perforation	6/18 R	8.7	1188	1998	333	–	•	–
	8/18 R	15.5	1188	1998	333	•	•	•
	10/23 R	14.8	1196	2001	333.5	–	•	•
	12/25 R	18.1	1200	2000	333.3	•	•	•
	15/30 R	19.6	1200	1980	330	–	•	–


Standard circular perforation 6/18 R

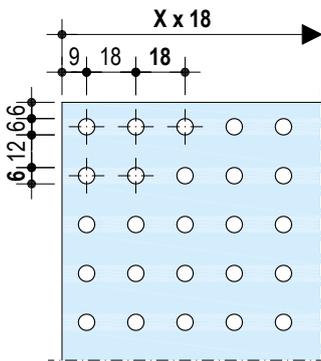


Standard circular perforation 8/18 R

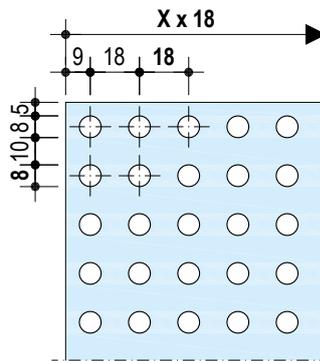


Standard circular perforation 10/23 R

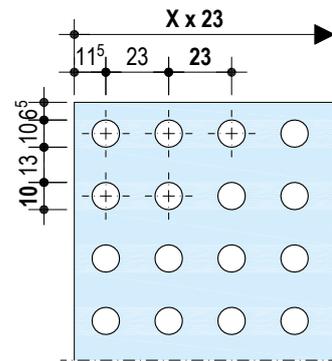

Standard circular perforation 12/25 R

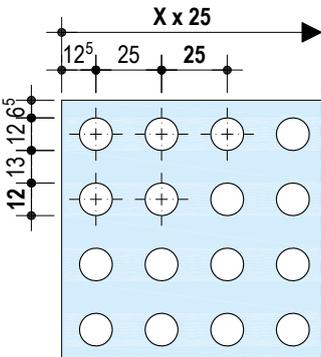

Standard circular perforation 15/30 R

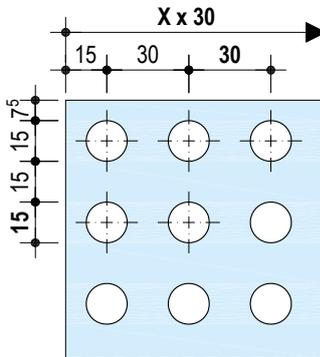

Board dimensions = X x perforation spacing (X = number of perforations)

Axial spacings of the furring channel **b**: With case related manufacturing (e.g. according to installation plan) the axial spacings must be adapted to the board dimensions (observe the maximum permissible axial spacings).


Other variants or customized designs with Cleaneo Classic boards on request.

Cleaneo Classic boards – continuous perforation


Scheme drawings | Face side | Dimensions in mm

Design	Perforation	Perforation ratio (board) %	Board dimensions (standard sizes)		Furring channel Maximum spacings b mm	Edge designs		
			Width mm	Length mm		4SK	UFF	linear
Alternating circular perforation	8/12/50 R	13.1	1200	2000	333.3	-	•	-
	12/20/66 R	19.6	1188	1980	330	-	•	•

Alternating circular perforation 8/12/50 R

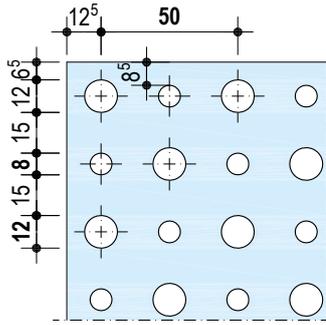


Alternating circular perforation 12/20/66 R

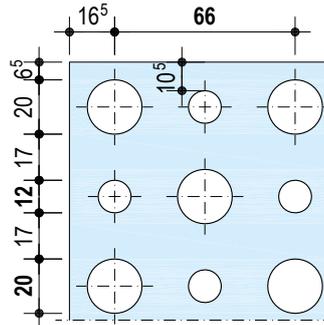


Design	Perforation	Perforation ratio (board) %	Board dimensions (standard sizes)		Furring channel Maximum spacings b mm	Edge designs		
			Width mm	Length mm		4SK	UFF	linear
Standard square perforation	8/18 Q	19.8	1188	1998	333	•	•	-
	12/25 Q	23.0	1200	2000	333.3	•	•	•

Standard square perforation 8/18 Q

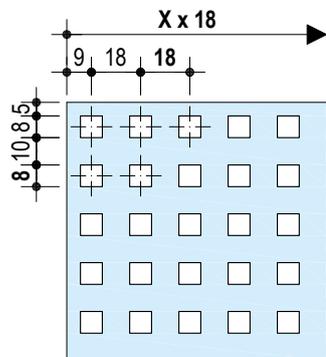

Standard square perforation 12/25 Q

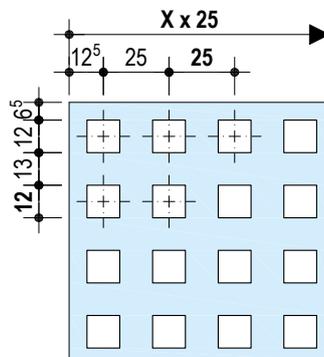

Board dimensions = X x perforation spacing (X = number of perforations)

Axial spacings of the furring channel **b** : With case related manufacturing (e.g. according to installation plan) the axial spacings must be adapted to the board dimensions (observe the maximum permissible axial spacings).


Other variants or customized designs with Cleaneo Classic boards on request.

Cleaneo Classic boards – continuous perforation


Scheme drawings | Face side | Dimensions in mm

Design	Perforation	Perforation ratio (board) %	Board dimensions (standard sizes)		Furring channel Maximum spacings b mm	Edge designs		
			Width mm	Length mm		4SK	UFF	linear
Random perforation	8/15/20 R	9.9	1200	2000	333.3	•	•	–
	10/16/22 R	12.6	1200	2000	333.3	–	•	–
	12/20/35 R	9.8	1200	1875	312.5	–	•	–
Random perforation RE	–	13.6	1199	1999	333.3	–	•	–


Random perforation 8/15/20 R

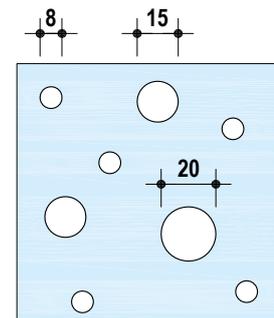


Random perforation 10/16/22 R

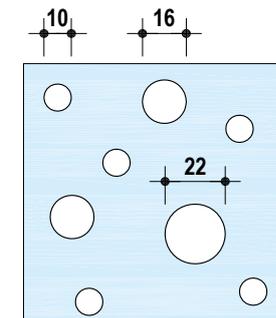

Random perforation 12/20/35 R

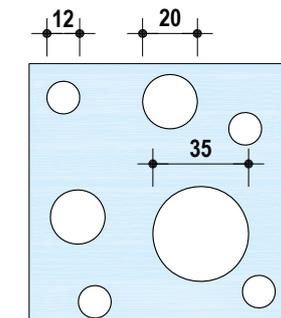


Random perforation RE

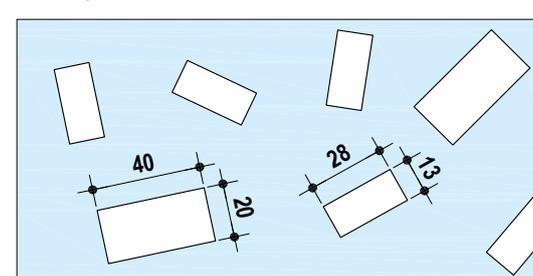
Cleaneo Classic boards – Complete

Design	Perforation	Perforation ratio (board) %	Board dimensions (standard sizes)		Furring channel Maximum spacings b mm	Edge designs 4FK
			Width mm	Length mm		
Standard circular perforation	8/18 R	12.6	620	1250	250	•

Standard circular perforation 8/18 R

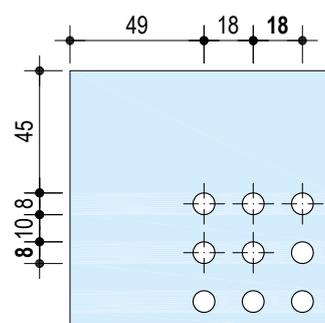

Axial spacings of the furring channel **b**: With case related manufacturing (e.g. according to installation plan) the axial spacings must be adapted to the board dimensions (observe the maximum permissible axial spacings).

Other variants or customized designs with Cleaneo Classic boards on request.

Cleaneo SK boards – non-perforated board edges / areas

Cleaneo Classic boards with continuous perforation and cut edge type (SK) are available on request with non-perforated board edges, e.g. for frieze application or connection to non-perforated ceiling surfaces. Non-perforated edges are possible on all sides. The non-perforated edges can also be implemented as a tapered edge (AK).

Please consider when planning and ordering:

- Match the axial spacings of the furring channels to the board dimensions
- Observe the maximum permissible axial spacings for the respective perforation.

Possible perforations:

- Standard circular perforation
- Alternating circular perforation
- Standard square perforation.

Boards must be from the same manufacturing batch, and this is why boards in case related manufacturing (e.g. boards manufactured according to an installation plan) or boards with non-perforated edges cannot be combined with boards manufactured in the standard production process.

Cleaneo Classic boards can also be manufactured with non-perforated board areas.


- Non-perforated areas in the longitudinal and/or lateral board direction
- Several non-perforated areas per board
- Only on the grid of the perforation spacing.

Edge designs	Board dimensions	Non-perforated board edges
4SK 	Observe the maximum standard size for the respective perforation.	All edge types possible
4AK 4-sided tapered edge 	Maximum 1200 x 2400 mm	4-side non-perforated edges ≥ 69 mm


Dimensional specifications for non-perforated board edges

Scheme drawings | Face side | Dimensions in mm

Technical production specification (example 15/30 R)

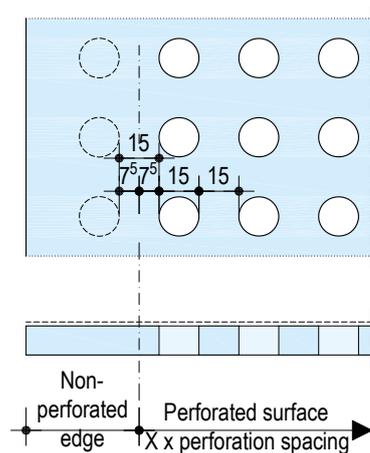


Optical details

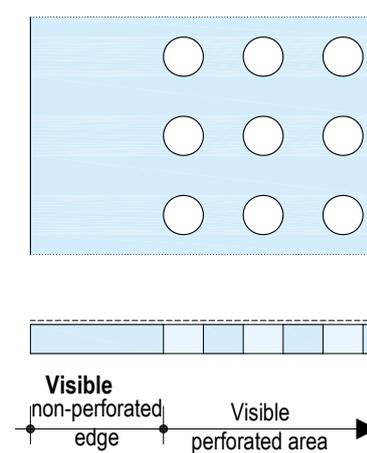


Cleaneo Classic boards – non-perforated board edges

Scheme Drawings | Face side | Technical product details


1-sided non-perforated – 4SK – example 8/18 R

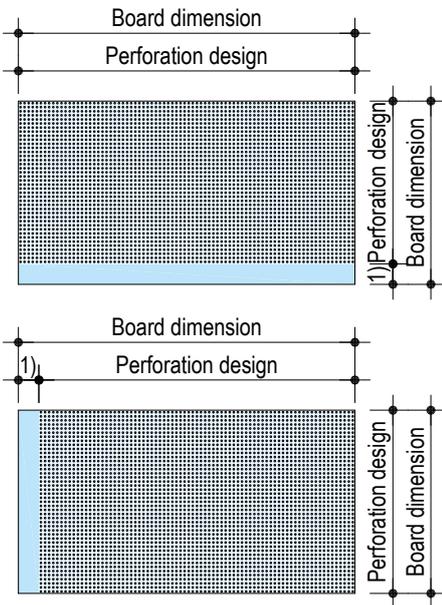


2-sided non-perforated – 4SK – example 12/25 Q

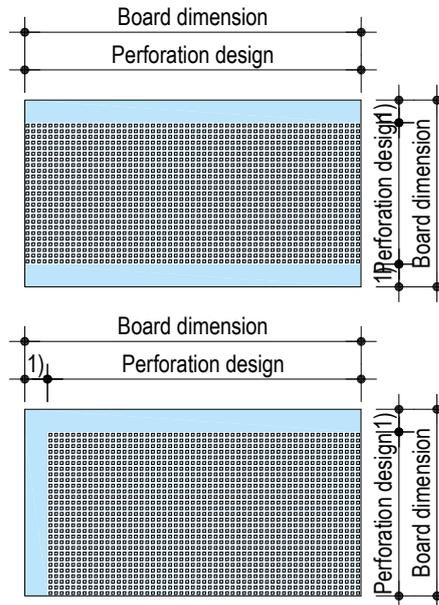

3-sided non-perforated – 4SK – example 12/20/66 R

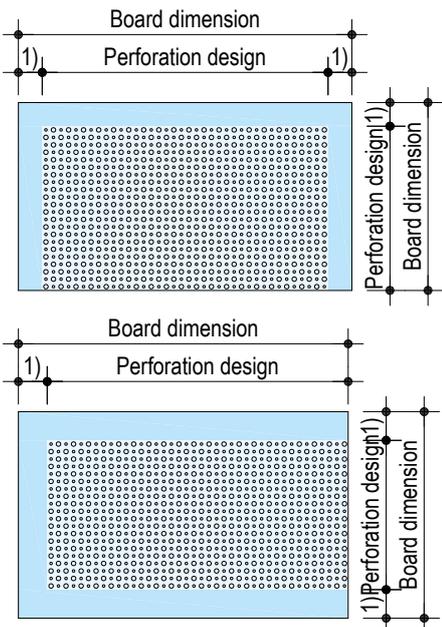


4-sided non-perforated – 4SK / 4AK – example 12/25 R

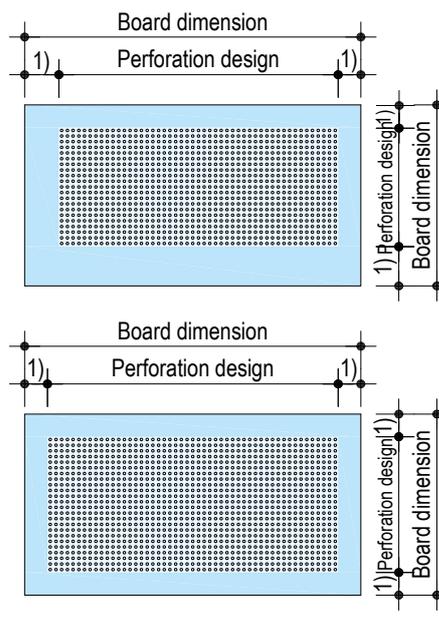

1) = non-perforated edge

Cleaneo Classic boards – non-perforated board areas

Example 12/25 R

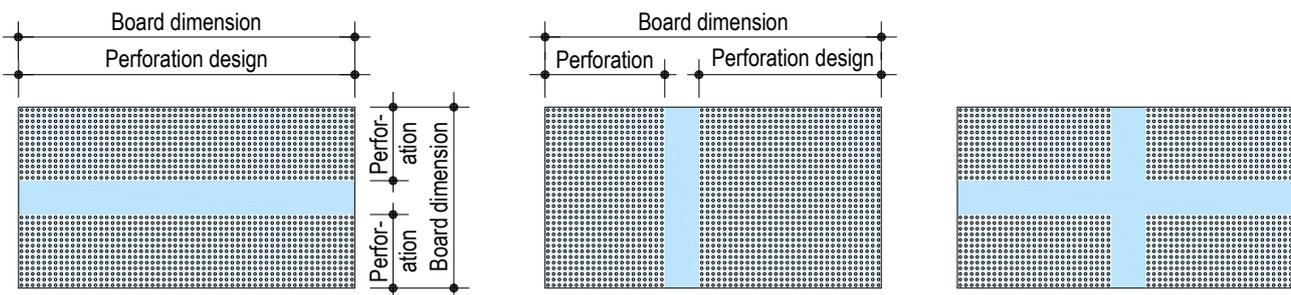

Cleaneo Classic boards – Block perforation


Dimensions are optical specifications (see page 24)

Design	Perforation	Perforations per "Block"		Edge – non-perforated		Perforation ratio (board) %	Board dimensions (standard sizes)		Furring channel Maximum spacings mm b	Edge designs	
		Lateral	Longitudinal	Lateral	Longitudinal		Width	Length		4SK	4AK
B4	8/18 R	30	30	41	41	12.1	1224	2448	312.5	●	–
	12/25 R	19	19	69	69	11.3	1200	2400	300	●	○
	12/25 Q	19	19	69	69	14.4	1200	2400	300	●	○


● Standard edge types ○ Other edge types

Scheme drawings | Face side | Dimensions in mm

Design B4 – 8/18 R

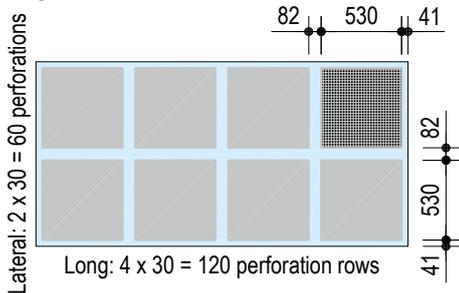

Design B4 – 12/25 R or 12/25 Q

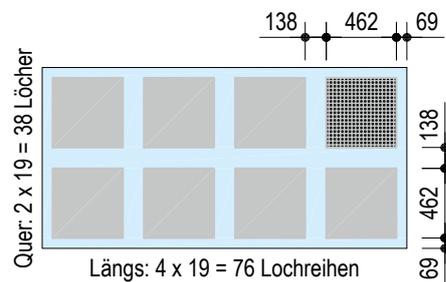




Cleaneo Classic boards – slotline

Design	Slots per "Block"		Edge – non-slotted		Slot ratio (board) %	Board dimensions (standard sizes)		Furring channel Maximum spacings mm b	Edge designs		
	Lateral	Longitudinal	Lateral	Longitudinal		Width	Length		HRK SFK	4SK	4AK
B6 – slotline	69	4	73.9	73.3	15.7	1200	2400	300	●	○	–

● Standard edge types ○ Other edge types

Scheme drawings | Face side | Dimensions in mm

Design B6 – slotline

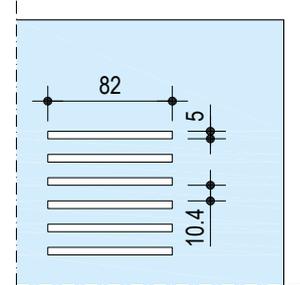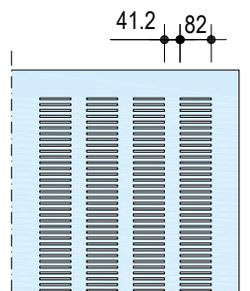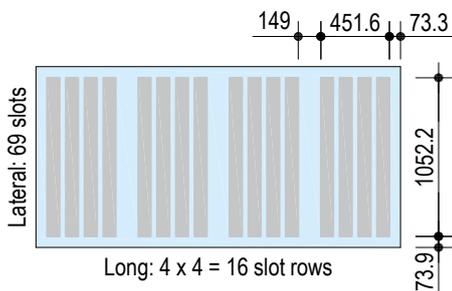

Direction of the slots only possible along the board

Boards must be from a single production line, this is why the boards in case/project related manufacturing (e.g. boards manufactured acc. to installation plan) cannot be manufactured with standard boards.

Axial spacings of the furring channel **b**: With case related manufacturing (e.g. according to installation plan) the axial spacings must be adapted to the board dimensions (observe the maximum permissible axial spacings).

Other variants or customized designs with Cleaneo Classic boards – block perforation on request.



Designpanel

Dimensions are optical details (see page 24)




Design	Perforation	Perforations per "Block"		Edge – non-perforated		Perforation ratio (board)	Board dimensions (standard sizes)		Furring channel Maximum spacings (b)	Edge types 4AK
		Lateral	Longitudinal	Lateral	Longitudinal		Width	Length		
				mm	mm	%	mm	mm	mm	
Tangent T3L1	Tangent	19	114	58	63	15.8	900	2400	300	•
Micro M2F	Micro	58	58	61	61	8.4	1200	2400	300	•

Tangent T3L1 (900 x 2400)

Scheme drawings | Face side | Dimensions in mm

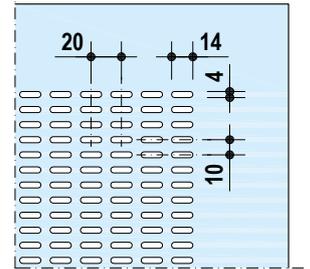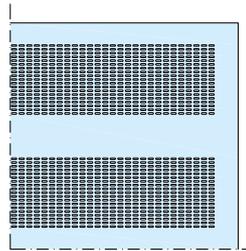

Micro M2F (1200 x 2400)

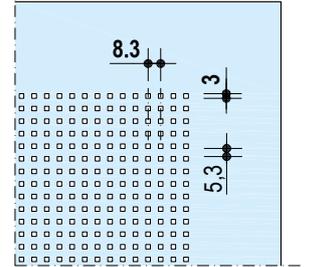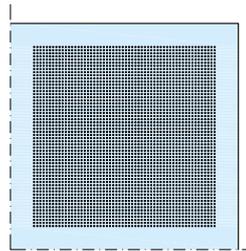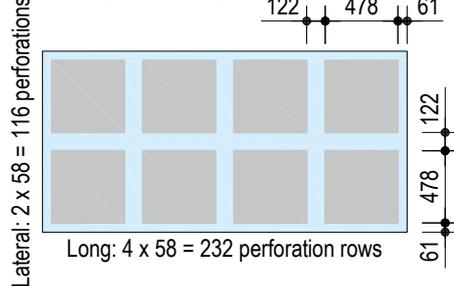

Boards must be from a single production line, this is why the boards in case/project related manufacturing (e.g. boards manufactured acc. to installation plan) cannot be manufactured with standard boards.

Axial spacings of the furring channel (b): With case related manufacturing (e.g. according to installation plan) the axial spacings must be adapted to the board dimensions (observe the maximum permissible axial spacings).

Other variants or customized designs with Cleaneo Classic boards – slotline or Designpanel on request.



Cleaneo UFF plaster base board

Dimensions are **optical** details (see page 24)

Design	Perforation	Perforations per "Block"				Edge – non-perforated		Perforation ratio (board) %	Board dimensions (standard size)		Furring channel Maximum axial spacing b mm	Edge types UFF
		Odd rows		Even rows		Lateral mm	Longitudinal mm		Width mm	Length mm		
		Lateral	Longitudinal	Lateral	Longitudinal							
Block perforation	12/25 R	40	15	39	14	106.5	19.0	27.0	1200	2000	400	•

Double row staggered 12 R

Scheme drawings | Face side | Dimensions in mm

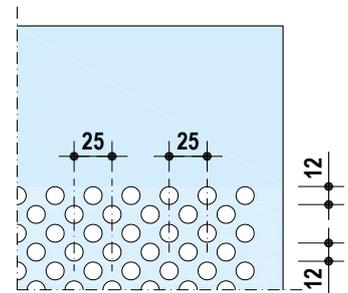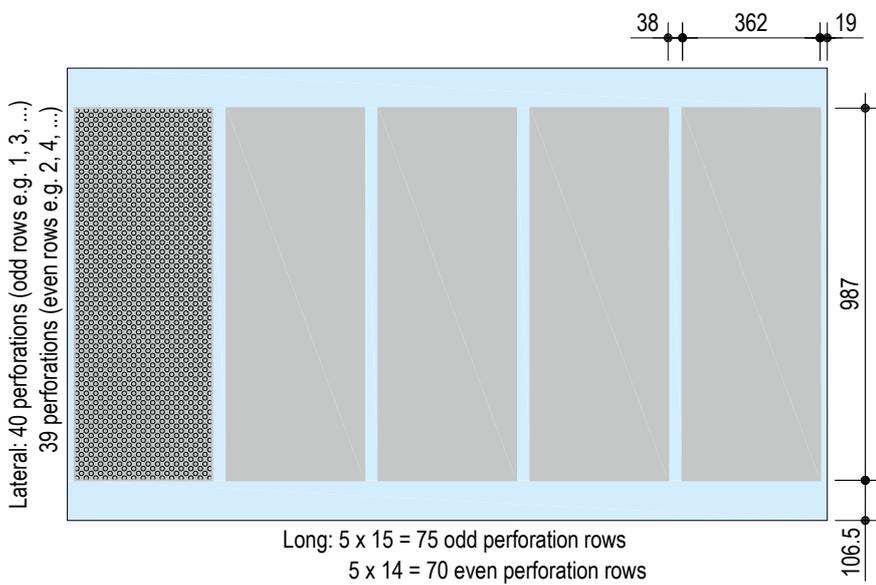

Ball impact safety (Cleaneo Classic)

Design	Perforation	Cladding	Furring channel
		Minimum thickness mm	Maximum spacing b mm
Standard circular perforation	12/25 R 15/30 R	12.5	200
Alternating circular perforation	12/20/66 R		
Standard square perforation.	8/18 Q 12/25 Q		
Random perforation RE	–		
Standard circular perforation	6/18 R 8/18 R 10/23 R	12.5	250
Complete	8/18 R		
Alternating circular perforation	8/12/50 R		
Random perforation	8/15/20 R 10/16/22 R 12/20/35 R		
Standard circular perforation	12/25 R 15/30 R	15	250
Alternating circular perforation	12/20/66 R		
Standard square perforation.	12/25 Q		
Standard circular perforation	8/18 R 10/23 R	15	333.5
Alternating circular perforation	8/12/50 R		
Random perforation	8/15/20 R		

Exact spacings of the furring channels **b** in dependence on the design and perforation – see section “Board design”.


Ball impact safety with continuous perforations and block perforations.

Ball impact safety acc. to DIN 18032-3 / DIN EN 13964 Annex D.

Installation of a ball impact safe access panel possible.

With board thickness 15 mm only cut square edge SK or UFF is possible.


Note Ball impact safety valid for systems D127.de and “Multi-level Ceiling System”. For systems D124.de and D137.de on request.

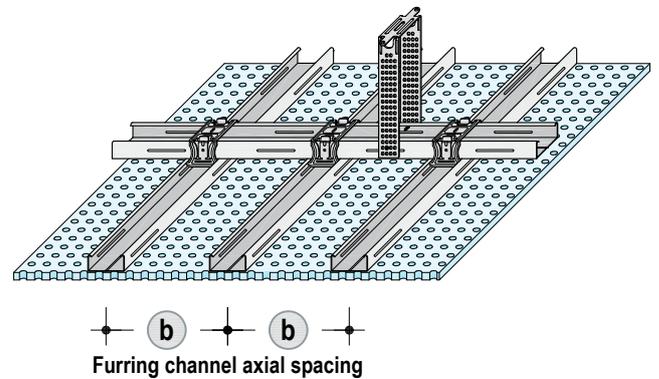

Airborne and impact sound insulation

Test configuration

Scheme drawings

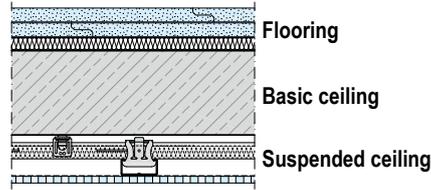

Suspended ceiling D127.de


- Damping Universal Bracket
- Mineral wool insulation layer acc. to EN 13162; length-related flow resistance acc. to EN 29053: $r \geq 5 \text{ kPa s/m}^2$
- Carrying and furring channel CD 60/27
- Cleaneo Acoustic 6/18 R or 12/25 Q

Terms


- R_w = Weighted sound reduction index in dB without sound transmission via flanking building components
- $L_{n,w}$ = Weighted normalized impact sound level in dB without sound transmission via flanking building components
- $\Delta R_{w,heavy}$ = Weighted sound reduction index in conjunction with a standard reference ceiling with a mass per unit area of $350 \pm 50 \text{ kg/m}^2$ acc. to EN ISO 10140-5:2010-12 appendix B
- $\Delta L_{n,w,calc}$ = Weighted reduction of impact sound pressure level in dB
- calc = Forecast value

Definitions


Footfall sound insulation (reduction of impact sound pressure level ΔL_n [dB])

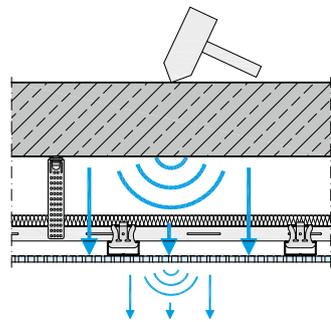

Insertion loss D_E [dB]

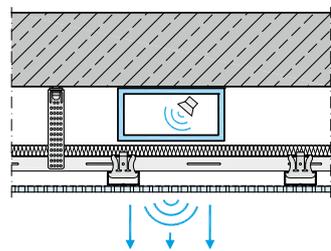

Airborne sound insulation (reduction index $\Delta R_{w,heavy,P}$ [dB])

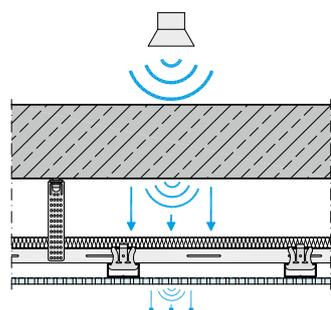

The following applies for calculated values acc. to EN 12354 on the following pages

- Margin for conversion of the forecast values in calculation value following the DIN 4109-2:2016 for ceilings:
 - 3 dB with normalized impact sound level
 - 2 dB with airborne sound reduction index
- Calculation of the sound reduction index and normalized impact sound level according to the procedure detailed in the EN 12354/2000
 - Part 1: Airborne sound insulation between rooms
 - Part 2: Impact sound insulation between rooms


Insertion loss D_E

The insertion loss D_E is determined acc. to VDI 3755:2015-1 and is defined as the equivalent sound absorption area A corrected difference of the mean sound level L with and without suspended ceiling:

$$D_E = L_{\text{without}} - L_{\text{with}} + 10 \log \left(\frac{A_{\text{with}}}{A_{\text{without}}} \right)$$

When D_E is used it is important to observe that it is dependent on the actual background noise and the position of the source and can thus be used by experienced specialists as an orientation value for planning. This value is only specified as a frequency-dependent value. The curve progressions and further details can be taken from the proof T017-07.17.

Example: Frequency-dependent insertion loss D_E

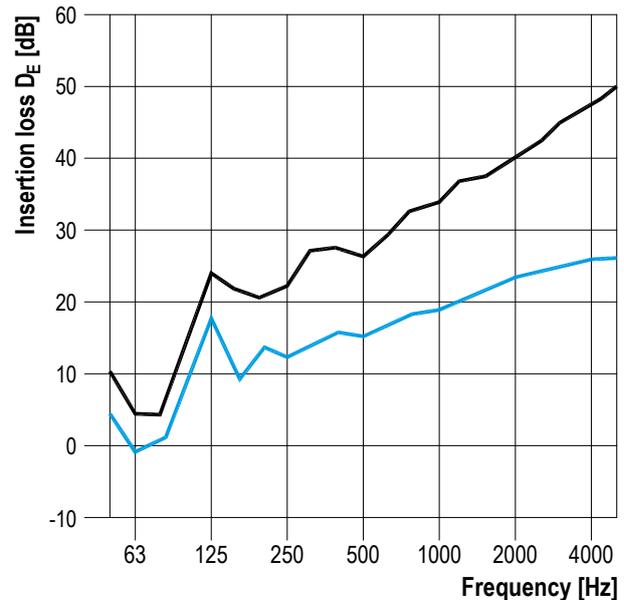





- Nonius suspender, 2x 80 mm partition insulation board TP 115, Carrying and furring channel CD 60/27, 12.5 mm Cleaneo 6/18 R Construction depth 400 mm
- Nonius suspender, 20 mm acoustic insulation board TP 120 A, Carrying and furring channel CD 60/27, 12.5 mm Cleaneo 6/18 R Construction depth 400 mm

Note

The verification of the new DIN 4109:2016-07 is no longer according to calculation values $R_{w,R}$ or $L_{n,w,R}$, but rather with the values obtained on the test rig $R_w/L_{n,w}$ rounded off to a single position following the decimal point. Only at the end of the forecast after consideration of all the perimeter surfaces (flanking surfaces) involved in the transmission of sound is an element of forecast uncertainty included in dependence on the type of separating constructional component.

Airborne and impact sound insulation with Cleaneo 6/18 R

Scheme drawings | Dimensions in mm



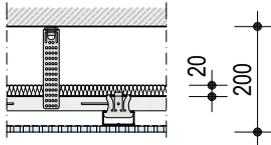
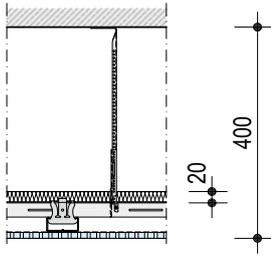
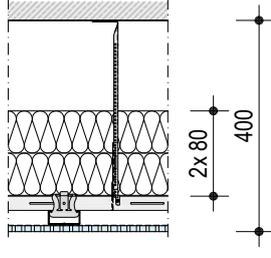
Basic ceiling Reinforced concrete ceiling 140 mm, approx. 320 kg/m ² (standard reference floor)	Without floor				Basic ceiling + flooring construction										
	Sound reduction index / normalized impact sound level				Floor construction				Knauf flowing screed						
	R_w dB	$R_{w,R}$ dB	$L_{n,w}$ dB	$L_{n,w,R}$ dB	Knauf pre-fab floor screed ■ 1x 18 mm Brio WF		■ 2x 23 mm Brio ■ 20 mm Knauf Insulation Trittschall-Dämmplatte TP-GP		Knauf flowing screed ■ 40 mm Knauf FE50 ■ 9.5 mm Knauf Wallboard ■ 25 mm mineral wool Trittschall-Dämmplatte stiffness group 10						
	Improvement index				Improvement index				Improvement index						
	$\Delta R_{w,heavy}$ dB	$\Delta L_{n,w}$ dB	$\Delta R_{w,heavy}$ dB	$\Delta L_{n,w}$ dB	$\Delta R_{w,heavy}$ dB	$\Delta L_{n,w}$ dB	$\Delta R_{w,heavy}$ dB	$\Delta L_{n,w}$ dB	$\Delta R_{w,heavy}$ dB	$\Delta L_{n,w}$ dB	$\Delta R_{w,heavy}$ dB	$\Delta L_{n,w}$ dB	$\Delta R_{w,heavy}$ dB	$\Delta L_{n,w}$ dB	
Without suspended ceiling	53.5	51	79.5	81	6	20	10	28	—	—	—	—	37	—	
Basic ceiling + subceiling Cleaneo 6/18 R	Improvement index				Basic ceiling + flooring + subceiling										
	Calculated values according to the procedure detailed in the DIN EN 12354-1:2000 (airborne sound) and DIN EN 12354-2:2000 (impact sound)				$R_{w,calc}$ dB	$R_{w,R}$ dB	$L_{n,w,calc}$ dB	$L_{n,w,R}$ dB	$R_{w,calc}$ dB	$R_{w,R}$ dB	$L_{n,w,calc}$ dB	$L_{n,w,R}$ dB	$R_{w,calc}$ dB	$R_{w,R}$ dB	$L_{n,w,calc}$ dB
 ■ Damping Universal Bracket ■ 20 mm Acoustic insulation board TP 120 A	12.0	20.1	66	64	48	51	71	69	41	44	—	—	31	34	
 ■ Nonius suspender ■ 20 mm Acoustic insulation board TP 120 A	11.3	19.2	67	65	48	51	72	70	40	43	—	—	31	34	
 ■ Nonius suspender ■ 2x 80 mm partition insulation board TP 115	15.6	25.9	69	67	45	48	75	73	38	41	—	—	28	31	

Note The divergent insulation layers have no significant influence on the sound absorption coefficient.

D127.de
D124.de
D126.de
D137.de
D134.de

Airborne and impact sound insulation with Cleaneo 12/25 Q





Scheme drawings | Dimensions in mm

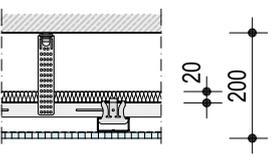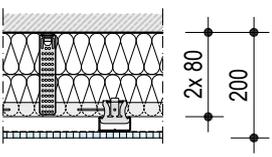Basic ceiling Reinforced concrete ceiling 140 mm, approx. 320 kg/m ² (standard reference floor)	Without floor				Basic ceiling + flooring construction										
	Sound reduction index / normalized impact sound level				Floor construction				Knauf pre-fab floor screed				Knauf flowing screed		
	R_w	$R_{w,R}$	$L_{n,w}$	$L_{n,w,R}$	Knauf pre-fab floor screed		Knauf flowing screed		Knauf pre-fab floor screed		Knauf flowing screed		Knauf flowing screed		
	dB	dB	dB	dB	■ 1x 18 mm Brio WF		■ 40 mm Knauf FE50 ■ 9.5 mm Knauf Wallboard ■ 25 mm mineral wool Trittschall-Dämmplatte stiffness group 10		■ 2x 23 mm Brio ■ 20 mm Knauf Insulation Trittschall-Dämmplatte TP-GP		■ 2x 23 mm Brio ■ 20 mm Knauf Insulation Trittschall-Dämmplatte TP-GP		■ 2x 23 mm Brio ■ 20 mm Knauf Insulation Trittschall-Dämmplatte TP-GP		
	$\Delta R_{w,heavy}$	$\Delta L_{n,w}$	$\Delta R_{w,heavy}$	$\Delta L_{n,w}$	Improvement index		Improvement index		Improvement index		Improvement index		Improvement index		
	dB	dB	dB	dB	$\Delta R_{w,heavy}$	$\Delta L_{n,w}$	$\Delta R_{w,heavy}$	$\Delta L_{n,w}$	$\Delta R_{w,heavy}$	$\Delta L_{n,w}$	$\Delta R_{w,heavy}$	$\Delta L_{n,w}$	$\Delta R_{w,heavy}$	$\Delta L_{n,w}$	
Without suspended ceiling	53.5	51	79.5	81	6	20	10	28	—	—	—	—	37	37	
Basic ceiling + subceiling Cleaneo 12/25 Q	Improvement index				Basic ceiling + flooring + subceiling										
	$\Delta R_{w,heavy}$	$\Delta L_{n,w}$	Improvement index		Calculated values according to the procedure detailed in the DIN EN 12354-1:2000 (airborne sound) and DIN EN 12354-2:2000 (impact sound)										
	dB	dB	$R_{w,calc}$	$R_{w,R}$	$L_{n,w,calc}$	$L_{n,w,R}$	$R_{w,calc}$	$R_{w,R}$	$L_{n,w,calc}$	$L_{n,w,R}$	$R_{w,calc}$	$R_{w,R}$	$L_{n,w,calc}$	$L_{n,w,R}$	
	4.8	14.5	59	57	55	58	64	62	48	51	—	—	39	42	
■ Damping Universal Bracket ■ 20 mm Acoustic insulation board TP 120 A															
	8.3	14.4	63	61	51	54	68	66	44	47	—	—	34	37	
■ Damping Universal Bracket ■ 20 mm Acoustic insulation board TP 120 A															
	13.4	25.3	67	65	48	51	73	71	41	44	—	—	29	32	
■ Damping Universal Bracket ■ 2x 80 mm partition insulation board TP 115															

Note The divergent insulation layers have no significant influence on the sound absorption coefficient.

Airborne and impact sound insulation with Cleaneo 12/25 Q (continued)

Scheme drawings | Dimensions in mm

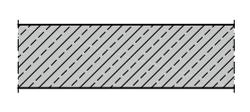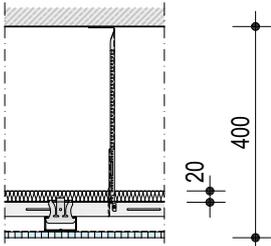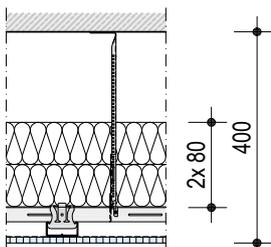Basic ceiling Reinforced concrete ceiling 140 mm, approx. 320 kg/m ² (standard reference floor)	Without floor				Basic ceiling + flooring construction									
	Sound reduction index / normalized impact sound level				Floor construction				Knauf flowing screed					
	R_w dB	$R_{w,R}$ dB	$L_{n,w}$ dB	$L_{n,w,R}$ dB	Knauf pre-fab floor screed ■ 1x 18 mm Brio WF		■ 2x 23 mm Brio ■ 20 mm Knauf Insulation Trittschall-Dämmplatte TP-GP		Knauf flowing screed ■ 40 mm Knauf FE50 ■ 9.5 mm Knauf Wallboard ■ 25 mm mineral wool Trittschall-Dämmplatte stiffness group 10					
	Improvement index				Improvement index				Improvement index					
	$\Delta R_{w,heavy}$ dB	$\Delta L_{n,w}$ dB	$\Delta R_{w,heavy}$ dB	$\Delta L_{n,w}$ dB	$\Delta R_{w,heavy}$ dB	$\Delta L_{n,w}$ dB	$\Delta R_{w,heavy}$ dB	$\Delta L_{n,w}$ dB	$\Delta R_{w,heavy}$ dB	$\Delta L_{n,w}$ dB	$\Delta R_{w,heavy}$ dB	$\Delta L_{n,w}$ dB		
Without suspended ceiling	53.5	51	79.5	81	6	20	10	28	—	—	—	37		
Basic ceiling + subceiling Cleaneo 12/25 Q	Improvement index				Basic ceiling + flooring + subceiling									
	Improvement index				Calculated values according to the procedure detailed in the DIN EN 12354-1:2000 (airborne sound) and DIN EN 12354-2:2000 (impact sound)									
	$\Delta R_{w,heavy}$ dB	$\Delta L_{n,w}$ dB	$R_{w,calc}$ dB	$R_{w,R}$ dB	$L_{n,w,calc}$ dB	$L_{n,w,R}$ dB	$R_{w,calc}$ dB	$R_{w,R}$ dB	$L_{n,w,calc}$ dB	$L_{n,w,R}$ dB	$R_{w,calc}$ dB	$R_{w,R}$ dB	$L_{n,w,calc}$ dB	$L_{n,w,R}$ dB
	7.8	14.1	64	62	50	53	69	67	43	46	—	—	34	37
■ Nonius suspender ■ 20 mm Acoustic insulation board TP 120 A														
	12.8	22.6	66	64	48	51	72	70	40	43	—	—	31	34
■ Nonius suspender ■ 2x 80 mm partition insulation board TP 115														

Note

The divergent insulation layers have no significant influence on the sound absorption coefficient.

Definitions

Definitions of the sound absorption coefficients following EN ISO 11654

The building materials and substances used in a room can be sound reflective from an acoustical point of view, so that they have no or very low sound absorbing characteristics. In this case, the rated sound absorption coefficient α_w is practically 0.

In contrast there are materials that are highly sound absorbing. Should 100% of the impinging sound energy be absorbed, i.e. the sound energy is fully converted to heat energy, the rated sound absorption coefficient α_w is practically 1.

α_s indicates the values of the frequency-dependent sound absorption coefficient measured in a reverberation chamber in third octaves. The practical sound absorption coefficient is formed based on this factor.

α_p are the values of the frequency-dependent, practical sound absorption coefficient made up of three third octaves. They are frequently used for frequency-dependent prognoses.

α_w is the rated sound absorption coefficient. It is independent of the frequency and specified as a single value quantity. The determination of the single value quantity is undertaken in accordance with the procedure described on page 35.

Shape indicators as suffixes to the rated sound absorption coefficient provide some indication of whether an absorbing material is particularly effective in the low, medium or high frequency range.

The following indicators are used:

- L, when the product is particularly effective in the low frequency range
e.g. $\alpha_w = 0.60$ (L)
- M, when the product is particularly effective in the medium frequency range.
e.g. $\alpha_w = 0.70$ (M)
- H, when the product is particularly effective in the high frequency range.
e.g. $\alpha_w = 0.85$ (H)
- Combinations are possible.
e.g. $\alpha_w = 0.70$ (MH)

Sound absorption class and descriptive term acc. to VDI 3755

Weighted sound absorption coefficient α_w	Rating
≥ 0.80	Extremely absorbing
0.60 to 0.75	Highly absorbing
0.30 to 0.55	Absorbing
0.15 to 0.25	Hardly absorbing
≤ 0.10	Reflecting

Knauf sound absorption diagrams

On the following pages, the frequency-dependent absorption values for room acoustic prognoses as dependent on the perforation pattern, the construction depth and insulation layer are listed. In addition to the values in tabular form, the curve progression of the frequency-dependent absorption response is represented in a graph.

For planar surfaces, the characteristic quantity for the practical sound absorption coefficient is the response between the octave frequencies of 125 Hz to 4000 Hz. Furthermore, the sound absorption coefficient α_w is specified as a single value quantity in addition to an NRC (Noise Reduction Coefficient) for the products. The American NRC quantity is determined from the α_s values as an arithmetic mean value of the third-octave frequencies 250 Hz, 500 Hz, 1000 Hz and 2000 Hz, and rounded off and expressed to the nearest multiple of 0.05.

For the majority of the listed items the acoustic quality was determined by measurement in a reverberation chamber in accordance with a standardized test procedure. The results of the tests are compiled in a test certificate and can be requested from the Technical Advisory Service.

The values shown in italics are projected absorption coefficients based on an empirical process performed on the basis of a large number of measurements in a simplified procedure as well as experience of the response of absorbent materials with variations in the construction depths, insulation material layers and perforation ratios of the surfaces.

Note

The Knauf Raumakustikrechner (room acoustics calculator) is available for individual calculation when Knauf acoustic products are employed (currently in German only).
<http://www.knauf.de/profi/tools-services/tools/raumakustikrechner/>


Determination of the single value quantity of the sound absorption coefficient α_w

1) Sound absorption coefficient

α_s = Sound absorption coefficient for third octave bandwidth
frequency-dependent value of sound absorption coefficient acc. to
DIN EN ISO 354, measured in third octave bands

α_p = Practical sound absorption coefficient
from α_s on octave bands converted
acc. to DIN EN ISO 11654

Example for 500 Hz: $\alpha_p 500 = \frac{\alpha_s 400 + \alpha_s 500 + \alpha_s 630}{3}$

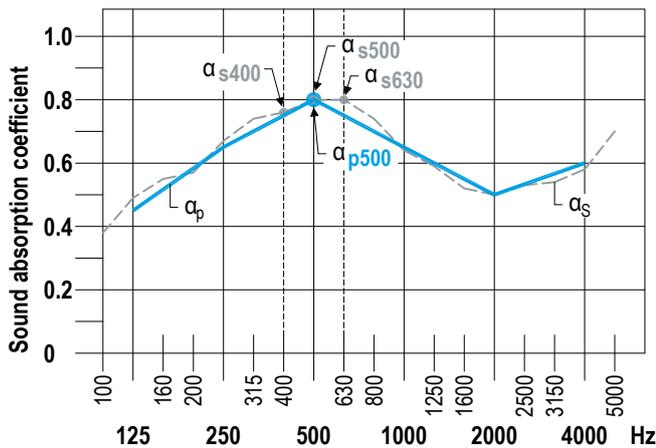


2) Weighted sound absorption coefficient

α_w = Weighted sound absorption coefficient
acc to DIN EN ISO 11654

Single number parameter of sound absorption coefficient
determined from a shifted reference curve
(sum of all negative deviations ≤ 0.10) and the point of
intersection at 500 Hz acc. to DIN EN ISO 11654

Example:

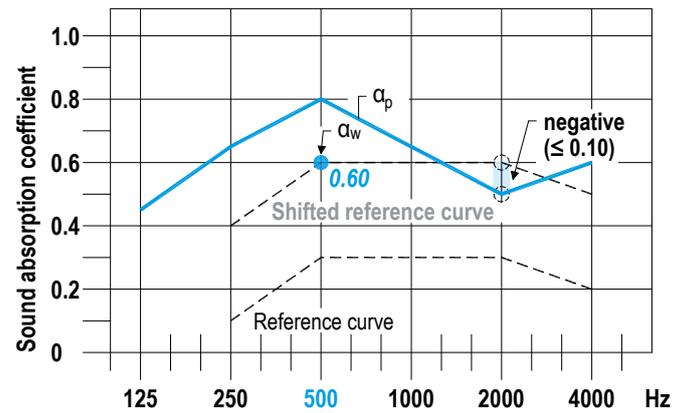


3) Shape indicators

α_w with shape indicators = α_w (...)


if α_p exceeds the reference curve for a single octave frequency by ≥ 0.25
then add:

(L) at 250 Hz (M) at 500 or 1000 Hz (H) at 2000 or 4000 Hz


Example (250 Hz): $0.65 - 0.40 = 0.25 (\geq 0.25) = (L) \rightarrow \alpha_w = 0.60 (L)$

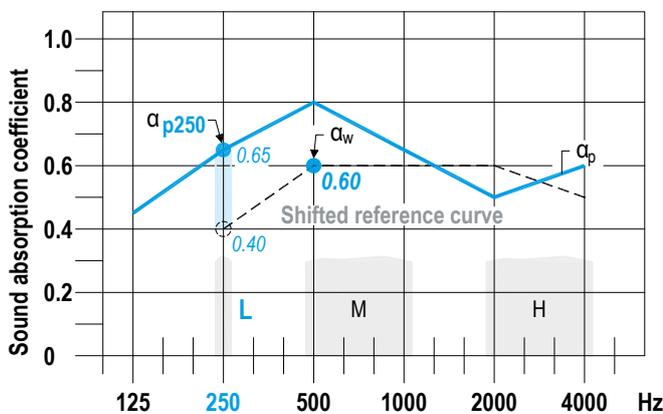

Example



Alternating circular perforation 12/20/66 R
with acoustical fleece
Perforation ratio: 19.6 %

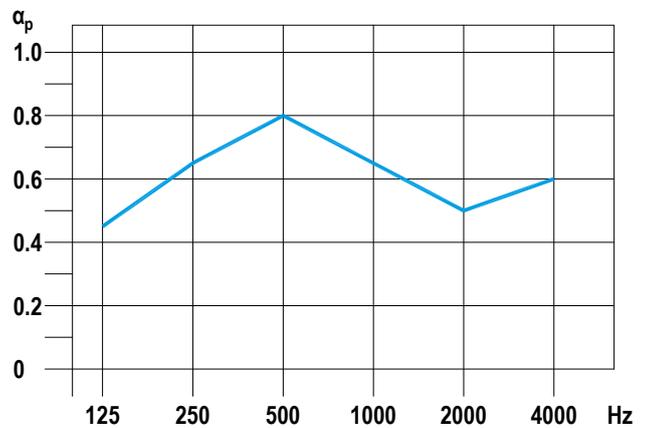

Construction depth 200 mm

α_p	0.45	0.65	0.80	0.65	0.50	0.60
------------	------	------	------	------	------	------

$\alpha_w = 0.60 (L)$

Highly absorbing

Requirements for the insulation layer

For those in the tables on the following pages for Cleaneo Acoustic Board Ceilings "with insulation layer"

Systems	Construction depth mm	Mineral wool EN 13162 thickness mm	Length- related flow resistance kPa·s/m ²	Insulation layer - examples Knauf Insulation	Weights of the insulation layer For rating the grid kg/m ²
D127.de Cleaneo Classic Cleaneo Complete Designpanel	≥ 65	20	≥ 11	Akustik-Dämmplatte TP 120 A	0.6
		40	≥ 5	Trennwand-Dämmplatte TP 115	0.8
		50	≥ 11	Akustik-Dämmplatte TP 440	1.5
D124.de 2nd grid level - furring channels only 2nd grid level - carrying and furring channels	≥ 40.5	25	Not specified	Trittschall-Dämmplatte TPE	3.1
		40	≥ 10	Fire Protection Insulation Board DPF-40 ¹⁾	1.8
D126U.de Cleaneo UFF plaster base board	65	20	≥ 11	Akustik-Dämmplatte TP 120 A	0.6
	≥ 80	40	≥ 5	Trennwand-Dämmplatte TP 115	0.8
D137.de Cleaneo Classic Designpanel	≥ 65	20	≥ 11	Akustik-Dämmplatte TP 120 A	0.6
		50	≥ 11	Akustik-Dämmplatte TP 440	1.5
D134.de	≥ 90	50	≥ 16	Fire Protection Insulation Board DPF-50	2.9

1) Sound absorption tested with Knauf Insulation Fire Protection Insulation Board DPF-40. Required for fire resistance: Mineral wool **S**, thickness ≥ 50 mm; density ≥ 50 kg/m³

Note Should there be demands made regarding the reaction to fire of acoustic ceilings (e.g. non-combustible), it will be necessary to provide proof for all materials, including (incorporated) mineral wool used as an acoustic lining.


Construction depth

The construction depth is a decisive property for the acoustic effectiveness of suspended ceilings. With an increase in spacings, the sound absorption values in the low frequency range improve.


The construction depths have differing effects depending on the suspended ceiling system.

Scheme drawings


D127.de, D126U.de

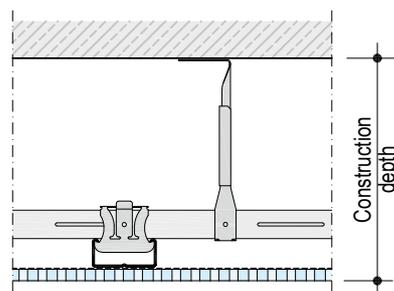


D137.de

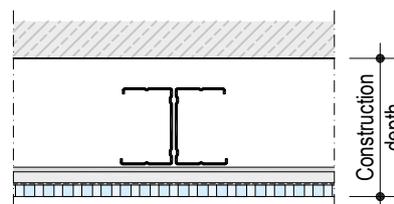

D124.de






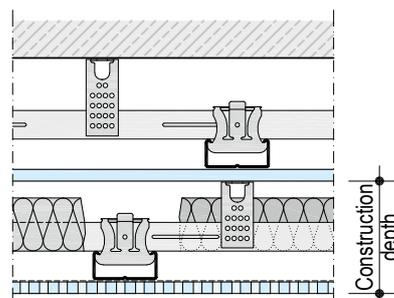


D134.de

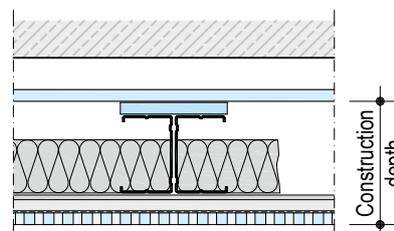







D127.de Cleaneo Acoustic Board Ceiling

12.5 mm Cleaneo Classic Boards with Acoustical Fleece

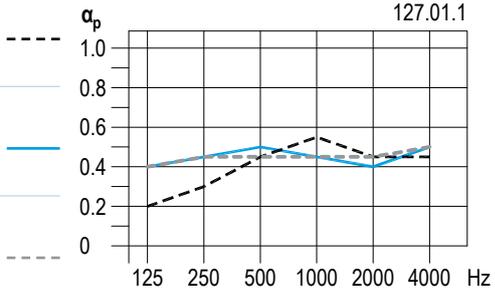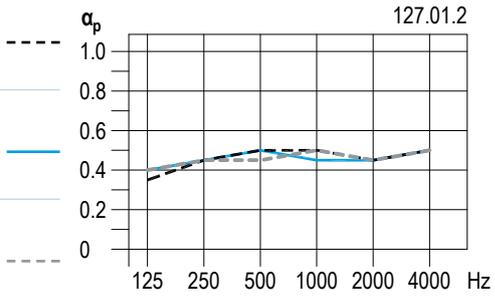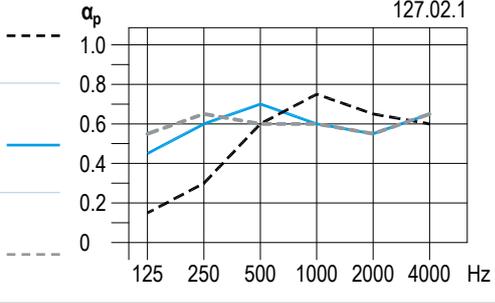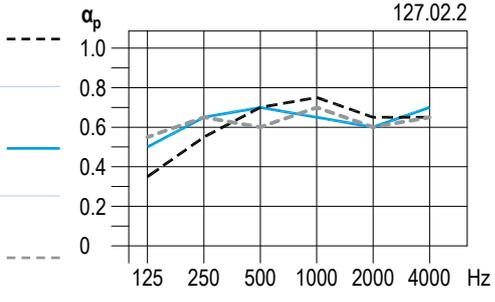Perforation pattern	Con- struc- tion depth mm	NRC	α_w	Frequency-dependent absorption coefficient α_p						
				125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	
Standard circular perforation 6/18 R  Perforation ratio: 8.7 %	Without insulation layer									
	65	0.45	0.50	0.20	0.30	0.45	0.55	0.45	0.45	
	200	0.45	0.45	0.40	0.45	0.50	0.45	0.40	0.50	
	400	0.45	0.45	0.40	0.45	0.45	0.45	0.45	0.50	
	With insulation layer (For requirements on insulation layer see page 36)									
	65	0.50	0.50	0.35	0.45	0.50	0.50	0.45	0.50	
200	0.45	0.50	0.40	0.45	0.50	0.45	0.45	0.50		
400	0.45	0.50	0.40	0.45	0.45	0.50	0.45	0.50		
Standard circular perforation 8/18 R  Perforation ratio: 15.5 %	Without insulation layer									
	65	0.55	0.60	0.15	0.30	0.60	0.75	0.65	0.60	
	200	0.60	0.60	0.45	0.60	0.70	0.60	0.55	0.65	
	400	0.60	0.60 (L)	0.55	0.65	0.60	0.60	0.55	0.65	
	With insulation layer (For requirements on insulation layer see page 36)									
	65	0.65	0.70	0.35	0.55	0.70	0.75	0.65	0.65	
200	0.65	0.65	0.50	0.65	0.70	0.65	0.60	0.70		
400	0.65	0.65	0.55	0.65	0.60	0.70	0.60	0.65		







D127.de Cleaneo Acoustic Board Ceiling

12.5 mm Cleaneo Classic Boards with Acoustical Fleece

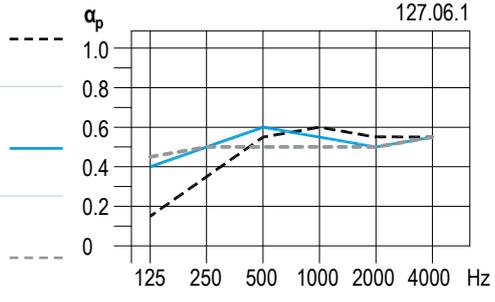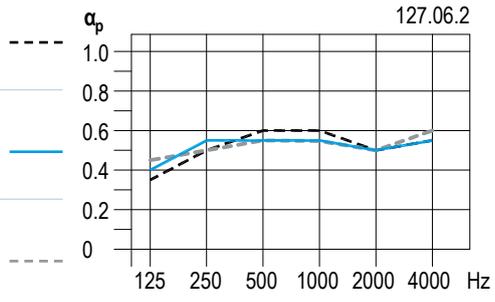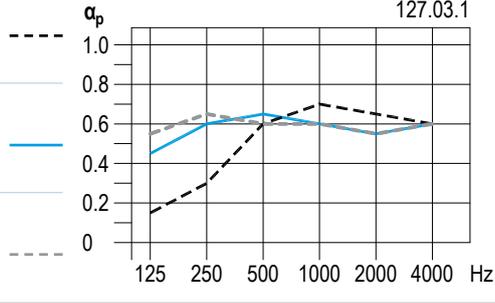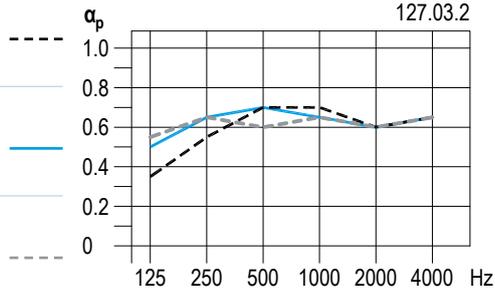Perforation pattern	Con- struc- tion depth mm	NRC	α_w	Frequency-dependent absorption coefficient α_p						
				125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	
Standard circular perforation 8/18 R Complete  Perforation ratio: 12.6 %	Without insulation layer									
	65	0.50	0.55	0.15	0.35	0.55	0.60	0.55	0.55	
	200	0.50	0.55	0.40	0.50	0.60	0.55	0.50	0.55	
	400	0.50	0.50	0.45	0.50	0.50	0.50	0.50	0.55	
	With insulation layer (For requirements on insulation layer see page 36)									
	65	0.55	0.60	0.35	0.50	0.60	0.60	0.50	0.55	
200	0.55	0.55	0.45	0.55	0.55	0.55	0.50	0.55		
400	0.55	0.55	0.45	0.50	0.55	0.55	0.50	0.60		
Standard circular perforation 10/23 R  Perforation ratio: 14.8 %	Without insulation layer									
	65	0.55	0.60	0.15	0.30	0.60	0.70	0.65	0.60	
	200	0.60	0.60	0.45	0.60	0.65	0.60	0.55	0.60	
	400	0.60	0.60 (L)	0.55	0.65	0.60	0.60	0.55	0.60	
	With insulation layer (For requirements on insulation layer see page 36)									
	65	0.65	0.70	0.35	0.55	0.70	0.70	0.60	0.65	
200	0.65	0.65	0.50	0.65	0.70	0.65	0.60	0.65		
400	0.65	0.65	0.55	0.65	0.60	0.65	0.60	0.65		







D127.de Cleaneo Acoustic Board Ceiling

12.5 mm Cleaneo Classic Boards with Acoustical Fleece

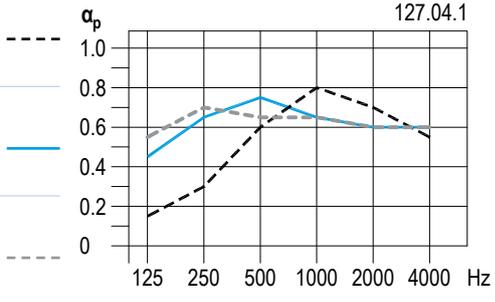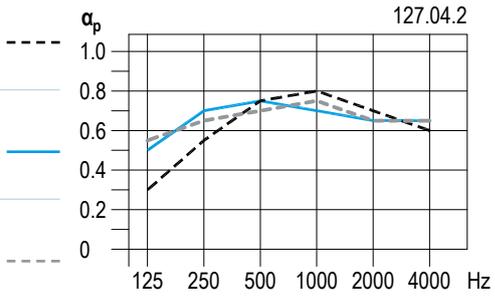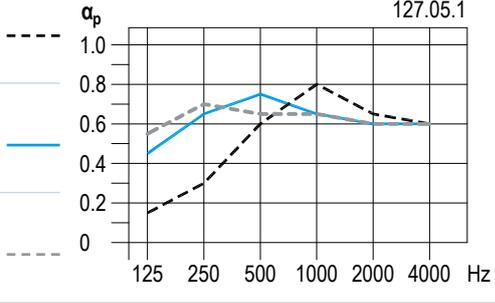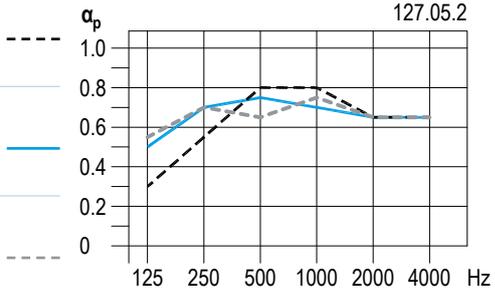Perforation pattern	Con- struc- tion depth mm	NRC	α_w	Frequency-dependent absorption coefficient α_p						
				125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	
Standard circular perforation 12/25 R  Perforation ratio: 18.1 %	Without insulation layer									
	65	0.60	0.60	0.15	0.30	0.60	0.80	0.70	0.55	
	200	0.65	0.65	0.45	0.65	0.75	0.65	0.60	0.60	
	400	0.65	0.65 (L)	0.55	0.70	0.65	0.65	0.60	0.60	
	With insulation layer (For requirements on insulation layer see page 36)									
	65	0.70	0.75	0.30	0.55	0.75	0.80	0.70	0.60	
200	0.70	0.70	0.50	0.70	0.75	0.70	0.65	0.65		
400	0.70	0.70	0.55	0.65	0.70	0.75	0.65	0.65		
Standard circular perforation 15/30 R  Perforation ratio: 19.6 %	Without insulation layer									
	65	0.60	0.60	0.15	0.30	0.60	0.80	0.65	0.60	
	200	0.65	0.65	0.45	0.65	0.75	0.65	0.60	0.60	
	400	0.65	0.65 (L)	0.55	0.70	0.65	0.65	0.60	0.60	
	With insulation layer (For requirements on insulation layer see page 36)									
	65	0.70	0.75	0.30	0.55	0.80	0.80	0.65	0.65	
200	0.70	0.70	0.50	0.70	0.75	0.70	0.65	0.65		
400	0.70	0.70	0.55	0.70	0.65	0.75	0.65	0.65		







D127.de Cleaneo Acoustic Board Ceiling

12.5 mm Cleaneo Classic Boards with Acoustical Fleece

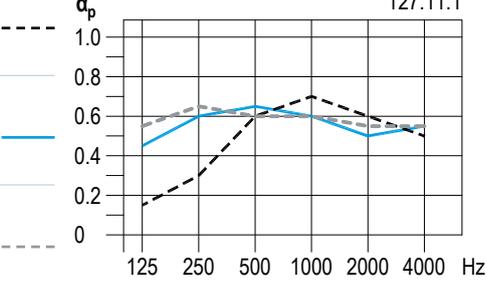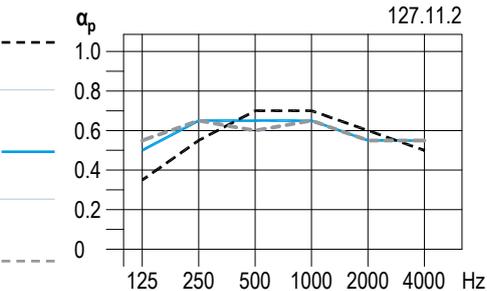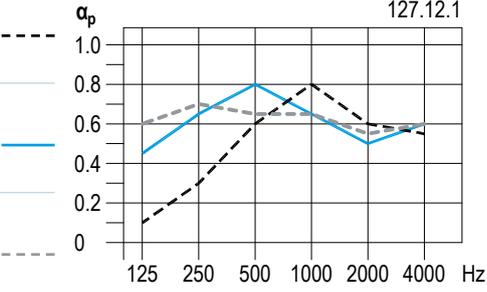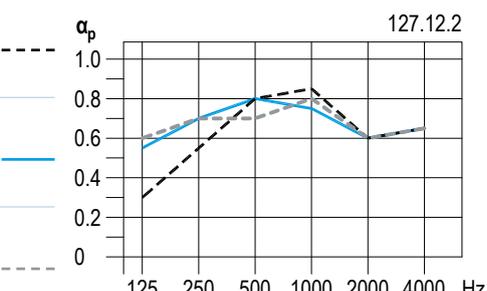Perforation pattern	Construction depth mm	NRC	α_w	Frequency-dependent absorption coefficient α_p						
				125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	
Alternating circular perforation 8/12/50 R  Perforation ratio: 13.1 %	Without insulation layer									
	65	0.55	0.60	0.15	0.30	0.60	0.70	0.60	0.50	
	200	0.60	0.60	0.45	0.60	0.65	0.60	0.50	0.55	
	400	0.60	0.60 (L)	0.55	0.65	0.60	0.60	0.55	0.55	
	With insulation layer (For requirements on insulation layer see page 36)									
	65	0.65	0.65	0.35	0.55	0.70	0.70	0.60	0.50	
200	0.60	0.65	0.50	0.65	0.65	0.65	0.55	0.55		
400	0.60	0.60 (L)	0.55	0.65	0.60	0.65	0.55	0.55		
Alternating circular perforation 12/20/66 R  Perforation ratio: 19.6 %	Without insulation layer									
	65	0.55	0.60	0.10	0.30	0.60	0.80	0.60	0.55	
	200	0.65	0.60 (L)	0.45	0.65	0.80	0.65	0.50	0.60	
	400	0.65	0.65 (L)	0.60	0.70	0.65	0.65	0.55	0.60	
	With insulation layer (For requirements on insulation layer see page 36)									
	65	0.70	0.70	0.30	0.55	0.80	0.85	0.60	0.65	
200	0.70	0.70	0.55	0.70	0.80	0.75	0.60	0.65		
400	0.70	0.70	0.60	0.70	0.70	0.80	0.60	0.65		

D127.de Cleaneo Acoustic Board Ceiling







12.5 mm Cleaneo Classic Boards with Acoustical Fleece

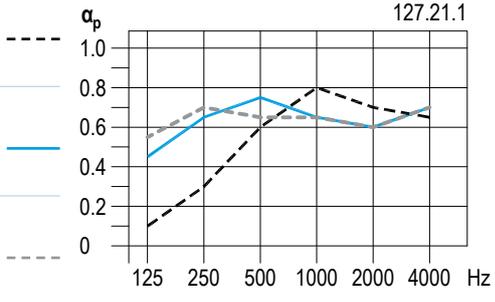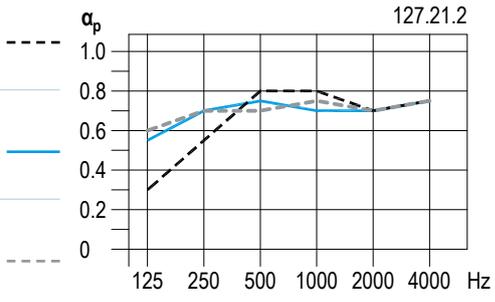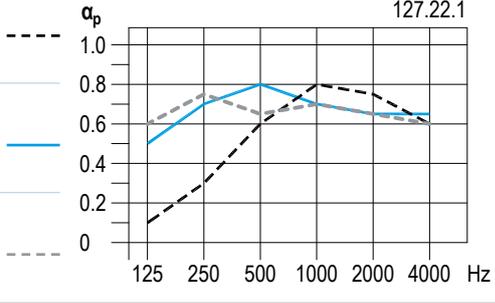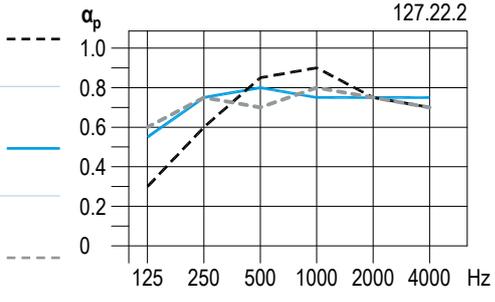Perforation pattern	Con-struction depth mm	NRC	α_w	Frequency-dependent absorption coefficient α_p						
				125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	
Standard square perforation 8/18 Q  Perforation ratio: 19.8 %	Without insulation layer									
	65	0.60	0.60	0.10	0.30	0.60	0.80	0.70	0.65	
	200	0.65	0.65	0.45	0.65	0.75	0.65	0.60	0.70	
	400	0.65	0.65 (L)	0.55	0.70	0.65	0.65	0.60	0.70	
	With insulation layer (For requirements on insulation layer see page 36)									
	65	0.70	0.75	0.30	0.55	0.80	0.80	0.70	0.75	
200	0.70	0.75	0.55	0.70	0.75	0.70	0.70	0.75		
400	0.70	0.75	0.60	0.70	0.70	0.75	0.70	0.75		
Standard square perforation 12/25 Q  Perforation ratio: 23.0 %	Without insulation layer									
	65	0.60	0.60	0.10	0.30	0.60	0.80	0.75	0.60	
	200	0.70	0.70	0.50	0.70	0.80	0.70	0.65	0.65	
	400	0.70	0.70 (L)	0.60	0.75	0.65	0.70	0.65	0.60	
	With insulation layer (For requirements on insulation layer see page 36)									
	65	0.75	0.80	0.30	0.60	0.85	0.90	0.75	0.70	
200	0.75	0.80	0.55	0.75	0.80	0.75	0.75	0.75		
400	0.75	0.75	0.60	0.75	0.70	0.80	0.75	0.70		

D127.de
D124.de
D1260.de
D137.de
D134.de







D127.de Cleaneo Acoustic Board Ceiling

12.5 mm Cleaneo Classic Boards with Acoustical Fleece

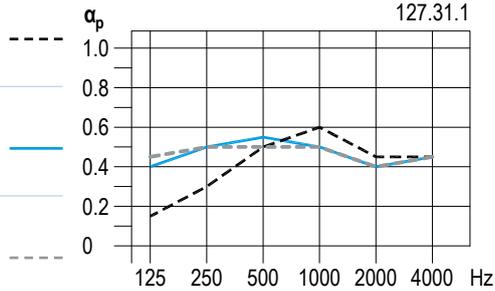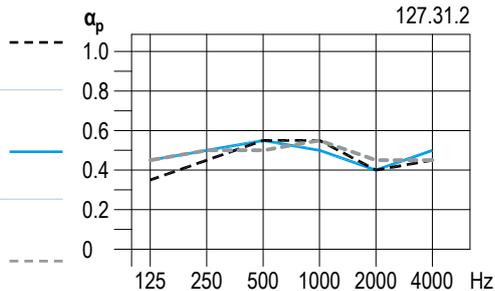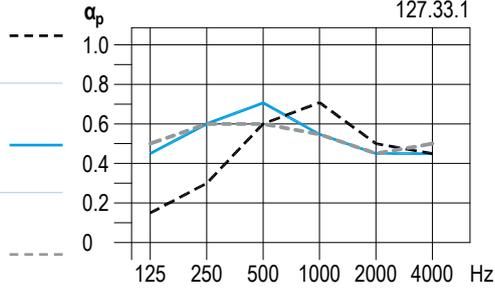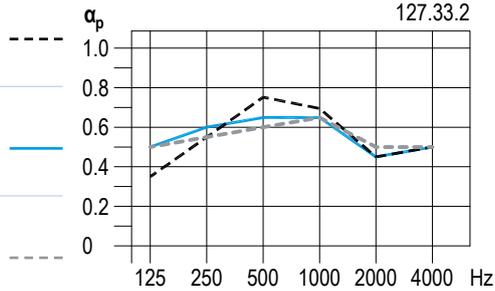Perforation pattern	Construction depth mm	NRC	α_w	Frequency-dependent absorption coefficient α_p						
				125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	
Random 8/15/20 R  Perforation ratio: 9.9 %	Without insulation layer									
	65	0.45	0.50	0.15	0.30	0.50	0.60	0.45	0.45	
	200	0.50	0.50	0.40	0.50	0.55	0.50	0.40	0.45	
	400	0.45	0.50	0.45	0.50	0.50	0.50	0.40	0.45	
	With insulation layer (For requirements on insulation layer see page 36)									
	65	0.50	0.50	0.35	0.45	0.55	0.55	0.40	0.45	
200	0.50	0.50	0.45	0.50	0.55	0.50	0.40	0.50		
400	0.50	0.50	0.45	0.50	0.50	0.55	0.45	0.45		
Random 10/16/22 R  Perforation ratio: 12.6 %	Without insulation layer									
	65	0.50	0.55	0.15	0.30	0.60	0.70	0.50	0.45	
	200	0.55	0.55	0.45	0.60	0.70	0.55	0.45	0.45	
	400	0.55	0.55 (L)	0.50	0.60	0.60	0.55	0.45	0.50	
	With insulation layer (For requirements on insulation layer see page 36)									
	65	0.60	0.55 (L)	0.35	0.55	0.75	0.70	0.45	0.50	
200	0.60	0.55 (L)	0.50	0.60	0.65	0.65	0.45	0.50		
400	0.55	0.60	0.50	0.55	0.60	0.65	0.50	0.50		







D127.de Cleaneo Acoustic Board Ceiling

12.5 mm Cleaneo Classic Boards with Acoustical Fleece

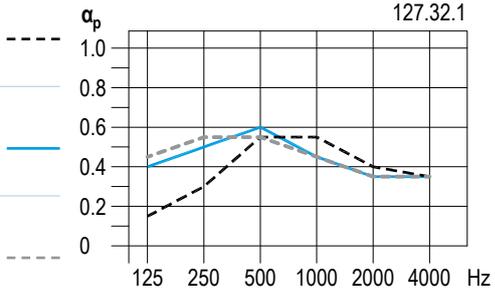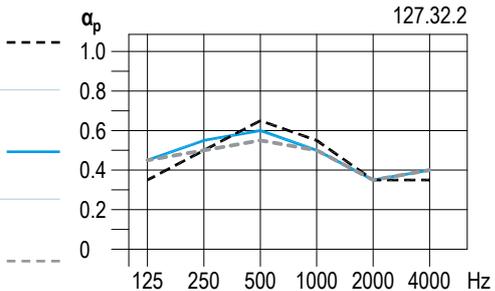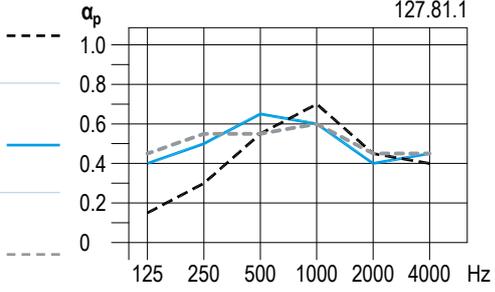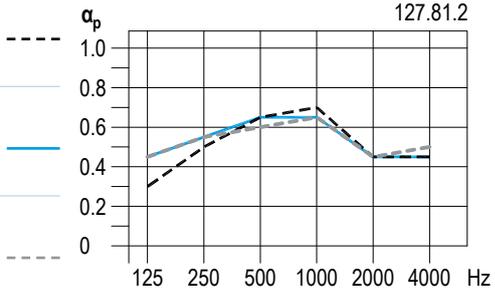Perforation pattern	Con- struc- tion depth mm	NRC	α_w	Frequency-dependent absorption coefficient α_p						
				125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	
Random perforation 12/20/35 R  Perforation ratio: 9.8 %	Without insulation layer									
	65	0.45	0.45	0.15	0.30	0.55	0.55	0.40	0.35	
	200	0.50	0.45 (L)	0.40	0.50	0.60	0.45	0.35	0.35	
	400	0.45	0.45 (L)	0.45	0.55	0.55	0.45	0.35	0.35	
	With insulation layer (For requirements on insulation layer see page 36)									
	65	0.50	0.45 (L)	0.35	0.50	0.65	0.55	0.35	0.35	
200	0.50	0.45 (L)	0.45	0.55	0.60	0.50	0.35	0.40		
400	0.50	0.45 (L)	0.45	0.50	0.55	0.50	0.35	0.40		
Random perforation RE  Perforation ratio: 13.6 %	Without insulation layer									
	65	0.50	0.50	0.15	0.30	0.55	0.70	0.45	0.40	
	200	0.55	0.50	0.40	0.50	0.65	0.60	0.40	0.45	
	400	0.55	0.55	0.45	0.55	0.55	0.60	0.45	0.45	
	With insulation layer (For requirements on insulation layer see page 36)									
	65	0.55	0.55	0.30	0.50	0.65	0.70	0.45	0.45	
200	0.55	0.55	0.45	0.55	0.65	0.65	0.45	0.45		
400	0.55	0.55	0.45	0.55	0.60	0.65	0.45	0.50		







D127.de Cleaneo Acoustic Board Ceiling

12.5 mm Cleaneo Classic Boards with Acoustical Fleece

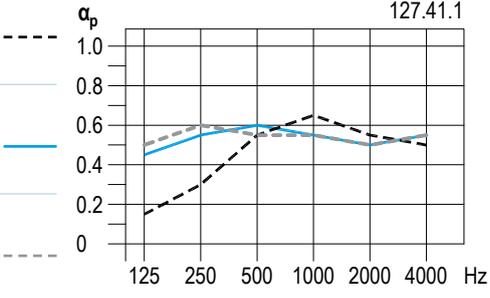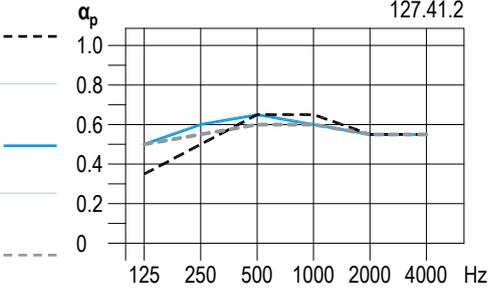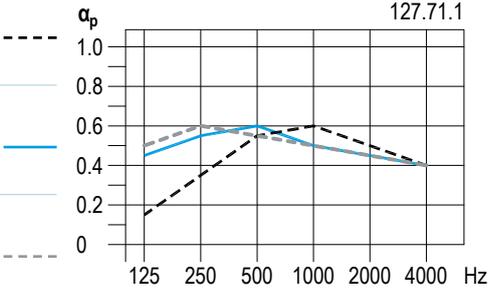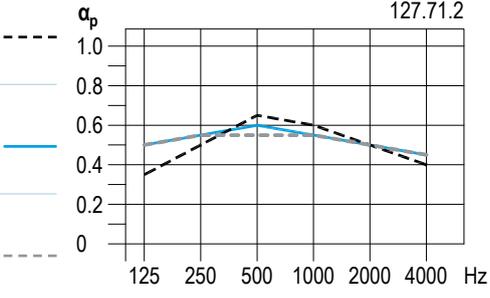Perforation pattern	Con-struction depth mm	NRC	α_w	Frequency-dependent absorption coefficient α_p						
				125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	
Block perforation Design B4 8/18 R  Perforation ratio: 12.1 %	Without insulation layer									
	65	0.50	0.55	0.15	0.30	0.55	0.65	0.55	0.50	
	200	0.55	0.55	0.45	0.55	0.60	0.55	0.50	0.55	
	400	0.50	0.55 (L)	0.50	0.60	0.55	0.55	0.50	0.55	
	With insulation layer (For requirements on insulation layer see page 36)									
	65	0.60	0.65	0.35	0.50	0.65	0.65	0.55	0.55	
200	0.60	0.60	0.50	0.60	0.65	0.60	0.55	0.55		
400	0.55	0.60	0.50	0.55	0.60	0.60	0.55	0.55		
Block perforation Design B4 12/25 R  Perforation ratio: 11.3 %	Without insulation layer									
	65	0.50	0.55	0.15	0.35	0.55	0.60	0.50	0.40	
	200	0.50	0.50 (L)	0.45	0.55	0.60	0.50	0.45	0.40	
	400	0.50	0.50 (L)	0.50	0.60	0.55	0.50	0.45	0.40	
	With insulation layer (For requirements on insulation layer see page 36)									
	65	0.55	0.55	0.35	0.50	0.65	0.60	0.50	0.40	
200	0.55	0.55	0.50	0.55	0.60	0.55	0.50	0.45		
400	0.55	0.55	0.50	0.55	0.55	0.55	0.50	0.45		







D127.de Cleaneo Acoustic Board Ceiling

12.5 mm Cleaneo Classic Boards with Acoustical Fleece

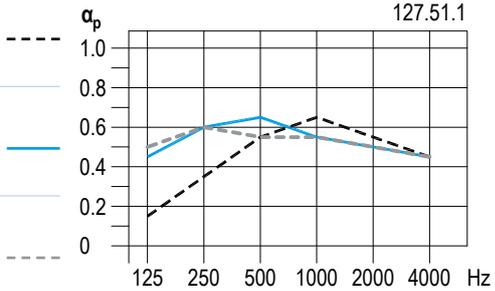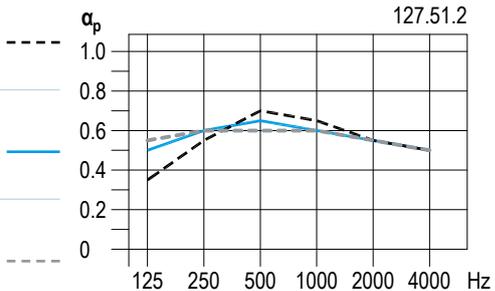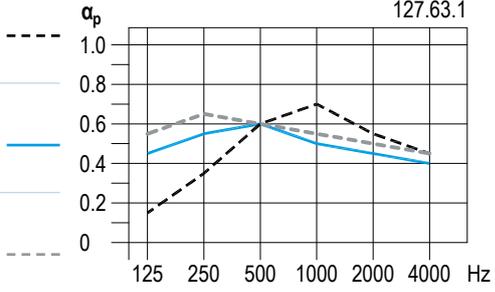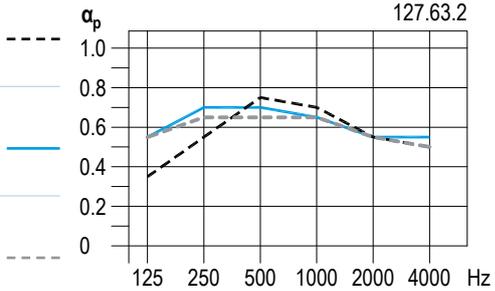Perforation pattern	Con- struc- tion depth mm	NRC	α_w	Frequency-dependent absorption coefficient α_p						
				125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	
Block perforation Design B4 12/25 Q  Perforation ratio: 14.4 %	Without insulation layer									
	65	0.50	0.55	0.15	0.35	0.55	0.65	0.55	0.45	
	200	0.55	0.55 (L)	0.45	0.60	0.65	0.55	0.50	0.45	
	400	0.55	0.55 (L)	0.50	0.60	0.55	0.55	0.50	0.45	
	With insulation layer (For requirements on insulation layer see page 36)									
	65	0.60	0.60	0.35	0.55	0.70	0.65	0.55	0.50	
200	0.60	0.60	0.50	0.60	0.65	0.60	0.55	0.50		
400	0.60	0.60	0.55	0.60	0.60	0.60	0.55	0.50		
slotline Design B6  Slot ratio: 15.7 %	Without insulation layer									
	65	0.55	0.55	0.15	0.35	0.60	0.70	0.55	0.45	
	200	0.50	0.50 (L)	0.45	0.55	0.60	0.50	0.45	0.40	
	400	0.60	0.55 (L)	0.55	0.65	0.60	0.55	0.50	0.45	
	With insulation layer (For requirements on insulation layer see page 36)									
	65	0.65	0.60	0.35	0.55	0.75	0.70	0.55	0.50	
200	0.65	0.65 (L)	0.55	0.70	0.70	0.65	0.55	0.55		
400	0.60	0.60 (L)	0.55	0.65	0.65	0.65	0.55	0.50		

D127.de Cleaneo Acoustic Board Ceiling

12.5 mm Designpanel with acoustical fleece

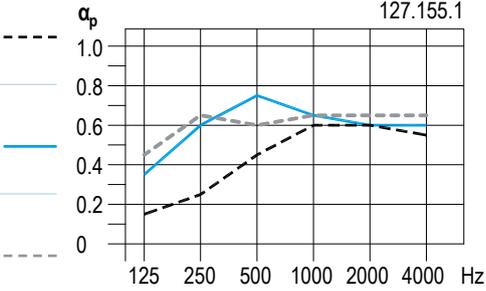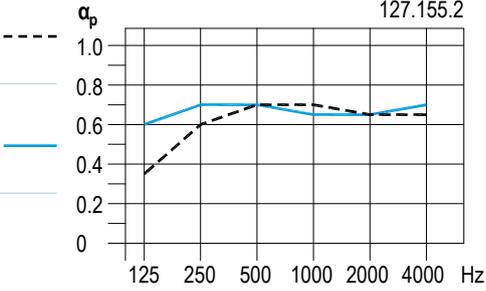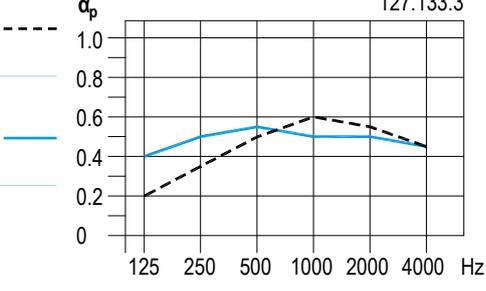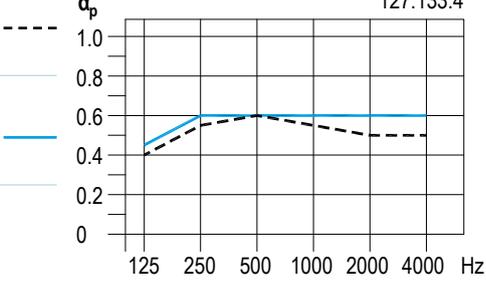Perforation pattern	Construction depth mm	NRC	α_w	Frequency-dependent absorption coefficient α_p						
				125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	
Tangent T3L1  Perforation ratio: 15.8 %	Without insulation layer									
	65	0.50	0.50	0.15	0.25	0.45	0.60	0.60	0.55	 127.155.1
	200	0.65	0.65	0.35	0.60	0.75	0.65	0.60	0.60	
	400	0.65	0.65	0.45	0.65	0.60	0.65	0.65	0.65	
	With insulation layer (For requirements on insulation layer see page 36)									
	65	0.65	0.70	0.35	0.60	0.70	0.70	0.65	0.65	 127.155.2
200	0.70	0.70	0.60	0.70	0.70	0.65	0.65	0.70		
400	-	-	-	-	-	-	-	-		
Micro M2F 1200 x 2400  Perforation ratio: 8.4 %	Without insulation layer									
	65	0.50	0.55	0.20	0.35	0.50	0.60	0.55	0.45	 127.133.3
	200	0.50	0.55	0.40	0.50	0.55	0.50	0.50	0.45	
	400	-	-	-	-	-	-	-	-	
	With insulation layer (For requirements on insulation layer see page 36)									
	65	0.55	0.55	0.40	0.55	0.60	0.55	0.50	0.50	 127.133.4
200	0.60	0.60	0.45	0.60	0.60	0.60	0.60	0.60		
400	-	-	-	-	-	-	-	-		

Absorption values in italics are calculated values. The basis used here is an empirical derivation from a range of simplified measurements with variations in the construction depths, perforation ratios and insulation material layers.




D124.de Cleaneo Acoustic Fire Protection Ceilings


12.5 mm Cleaneo Classic boards with Acoustical Fleece and mineral wool

Perforation pattern	Construction depth mm	NRC	α_w	Frequency-dependent absorption coefficient α_p																																																																																											
				125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz																																																																																						
Standard circular perforation 8/18 R Perforation ratio: 15.5 %	With insulation layer (For requirements on insulation layer see page 36)																																																																																														
	40.5	0.60	0.65	0.25	0.45	0.65	0.70	0.65	0.65	 124.02.2																																																																																					
	112.5	0.65	0.70	0.45	0.65	0.70	0.70	0.60	0.65		Standard circular perforation 12/25 R Perforation ratio: 18.1 %	With insulation layer (For requirements on insulation layer see page 36)									40.5	0.65	0.70	0.25	0.45	0.70	0.75	0.70	0.70	 124.04.2	112.5	0.70	0.70	0.45	0.70	0.75	0.70	0.65	0.60	Alternating circular perforation 12/20/66 R Perforation ratio: 19.6 %	With insulation layer (For requirements on insulation layer see page 36)									40.5	0.65	0.70	0.25	0.45	0.70	0.80	0.65	0.70	 124.12.2	112.5	0.75	0.70	0.45	0.70	0.80	0.80	0.60	0.65	Standard square perforation 12/25 Q Perforation ratio: 23.0 %	With insulation layer (For requirements on insulation layer see page 36)									40.5	0.70	0.75	0.25	0.45	0.75	0.80	0.80	0.75	 124.22.2	112.5	0.80	0.80	0.45	0.70	0.85	0.80
Standard circular perforation 12/25 R Perforation ratio: 18.1 %	With insulation layer (For requirements on insulation layer see page 36)																																																																																														
	40.5	0.65	0.70	0.25	0.45	0.70	0.75	0.70	0.70	 124.04.2																																																																																					
	112.5	0.70	0.70	0.45	0.70	0.75	0.70	0.65	0.60		Alternating circular perforation 12/20/66 R Perforation ratio: 19.6 %	With insulation layer (For requirements on insulation layer see page 36)									40.5	0.65	0.70	0.25	0.45	0.70	0.80	0.65	0.70	 124.12.2	112.5	0.75	0.70	0.45	0.70	0.80	0.80	0.60	0.65	Standard square perforation 12/25 Q Perforation ratio: 23.0 %	With insulation layer (For requirements on insulation layer see page 36)									40.5	0.70	0.75	0.25	0.45	0.75	0.80	0.80	0.75	 124.22.2	112.5	0.80	0.80	0.45	0.70	0.85	0.80	0.75	0.70																											
Alternating circular perforation 12/20/66 R Perforation ratio: 19.6 %	With insulation layer (For requirements on insulation layer see page 36)																																																																																														
	40.5	0.65	0.70	0.25	0.45	0.70	0.80	0.65	0.70	 124.12.2																																																																																					
	112.5	0.75	0.70	0.45	0.70	0.80	0.80	0.60	0.65		Standard square perforation 12/25 Q Perforation ratio: 23.0 %	With insulation layer (For requirements on insulation layer see page 36)									40.5	0.70	0.75	0.25	0.45	0.75	0.80	0.80	0.75	 124.22.2	112.5	0.80	0.80	0.45	0.70	0.85	0.80	0.75	0.70																																																								
Standard square perforation 12/25 Q Perforation ratio: 23.0 %	With insulation layer (For requirements on insulation layer see page 36)																																																																																														
	40.5	0.70	0.75	0.25	0.45	0.75	0.80	0.80	0.75	 124.22.2																																																																																					
	112.5	0.80	0.80	0.45	0.70	0.85	0.80	0.75	0.70																																																																																						

D124.de Cleaneo Acoustic Fire Protection Ceilings

12.5 mm Cleaneo Classic boards with Acoustical Fleece and mineral wool


Perforation pattern	Construction depth mm	NRC	α_w	Frequency-dependent absorption coefficient α_p					
				125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
Random 8/15/20 R  Perforation ratio: 9.9 %	With insulation layer (For requirements on insulation layer see page 36)								
	40.5	0.45	0.50	0.25	0.40	0.50	0.55	0.45	0.40
112.5	0.50	0.50	0.40	0.50	0.55	0.55	0.40	0.45	

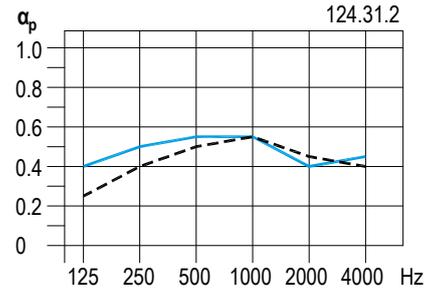

Test configuration

The construction depth for acoustic fire protection ceilings is defined up to the first, acoustically closed level. For this system it is up to the non-perforated board of the 1st grid level







Scheme drawings | Dimensions in mm

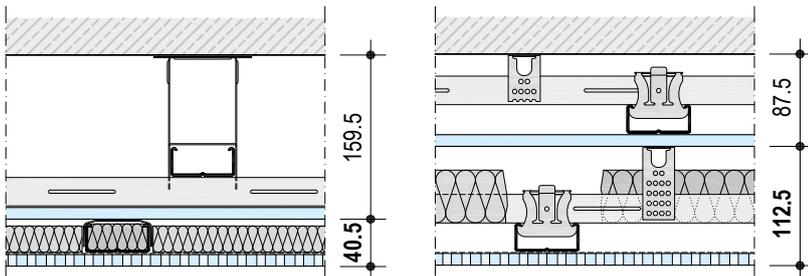

D127.de
D124.de
D1260.de
D137.de
D134.de

D126U.de Cleaneo Acoustic Board Ceiling UFF for Acoustical Plaster







12.5 mm Cleaneo UFF plaster base board with acoustical fleece

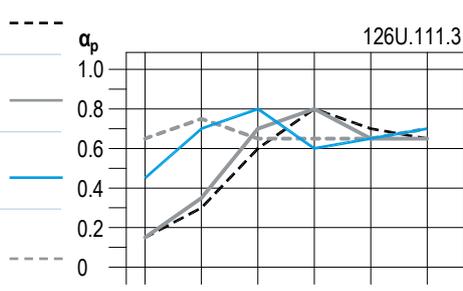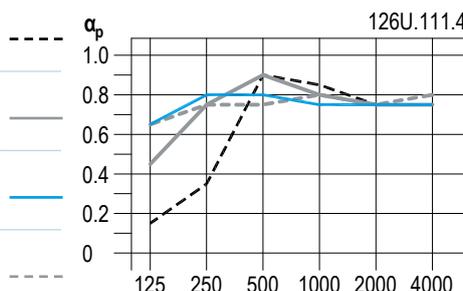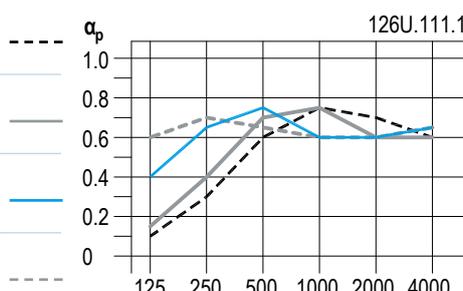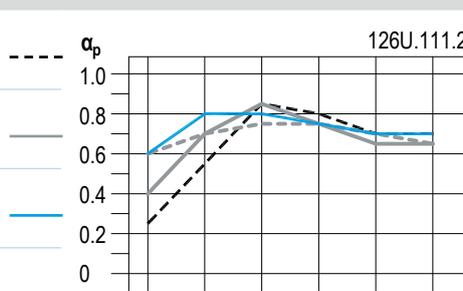Perforation pattern	Construction depth mm	NRC	α_w	Frequency-dependent absorption coefficient α_p						
				125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	
Alternating circular perforation 12/25 R 	Without insulation layer									
	65	0.60	0.60	0.15	0.30	0.60	0.80	0.70	0.65	
	80	0.65	0.65	0.15	0.35	0.70	0.80	0.65	0.65	
	200	0.70	0,65 (L)	0.45	0.70	0.80	0.60	0.65	0.70	
	400	0.65	0,65 (L)	0.65	0.75	0.65	0.65	0.65	0.70	
	With insulation layer (For requirements on insulation layer see page 36)									
	65	0.75	0.80	0.25	0.55	0.90	0.85	0.75	0.75	
	80	0.80	0.80	0.45	0.75	0.90	0.80	0.75	0.75	
200	0.80	0.80	0.65	0.80	0.80	0.75	0.75	0.75		
400	0.75	0.80	0.65	0.75	0.75	0.80	0.75	0.80		
Alternating circular perforation 12/25 R 	Without insulation layer									
	65	0.60	0.60	0.10	0.30	0.60	0.75	0.70	0.60	
	80	0.60	0.65	0.15	0.40	0.70	0.75	0.60	0.60	
	200	0.65	0.65	0.40	0.65	0.75	0.60	0.60	0.65	
	400	0.65	0,65 (L)	0.60	0.70	0.65	0.60	0.60	0.65	
	With insulation layer (For requirements on insulation layer see page 36)									
	65	0.75	0.75	0.25	0.55	0.85	0.80	0.70	0.70	
	80	0.75	0.75	0.40	0.70	0.85	0.75	0.65	0.65	
200	0.75	0,75 (L)	0.60	0.80	0.80	0.75	0.70	0.70		
400	0.70	0.75	0.60	0.70	0.75	0.75	0.70	0.65		

The specified values relate to the Cleaneo UFF Plaster Base Board Fleece with coating with fumi or KRAFT acoustical plaster.

D126U.de Cleaneo Acoustic Board Ceiling UFF for Acoustical Plaster





















12.5 mm Cleaneo UFF plaster base board with foil laminated on the rear

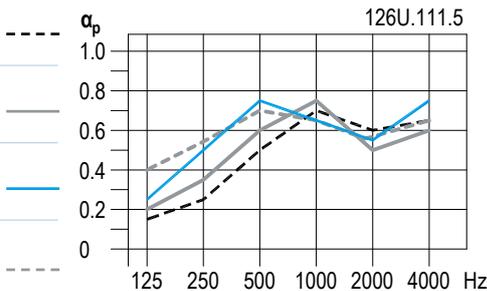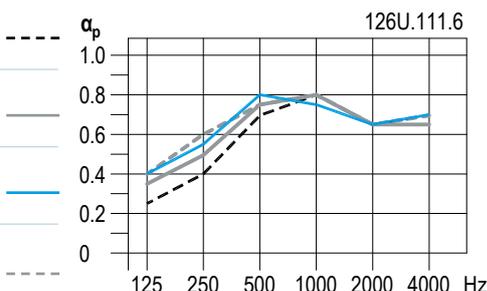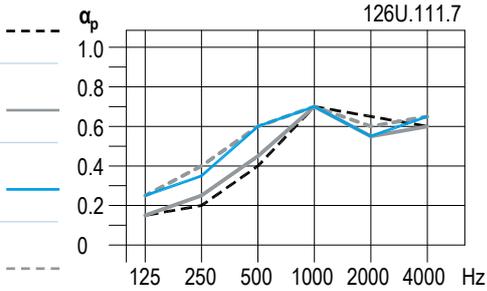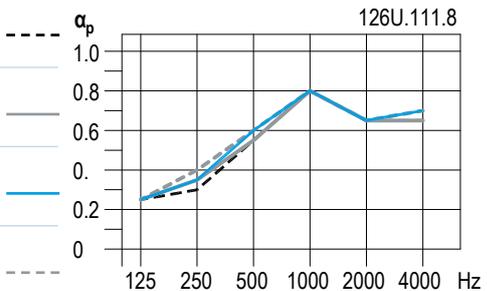Perforation pattern	Construction depth mm	NRC	α_w	Frequency-dependent absorption coefficient α_p						
				125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	
Alternating circular perforation 12/25 R  Perforation ratio: 27.0 % in conjunction with fumi acoustical plaster	Without insulation layer									
	65	0.50	0.50 (H)	0.15	0.25	0.50	0.70	0.60	0.65	
	80	0.55	0.55	0.20	0.30	0.60	0.75	0.50	0.60	
	200	0.60	0.65	0.35	0.50	0.75	0.65	0.55	0.65	
	400	0.60	0.65	0.40	0.55	0.70	0.65	0.55	0.65	
	With insulation layer (For requirements on insulation layer see page 36)									
	65	0.65	0.65	0.25	0.40	0.70	0.80	0.65	0.70	
	80	0.65	0.70	0.35	0.50	0.75	0.80	0.65	0.65	
200	0.70	0.75	0.40	0.55	0.80	0.75	0.65	0.70		
400	0.70	0.75	0.40	0.60	0.75	0.80	0.65	0.70		
Alternating circular perforation 12/25 R  Perforation ratio: 27.0 % in conjunction with KRAFT acoustical plaster	Without insulation layer									
	65	0.50	0.45 (MH)	0.15	0.20	0.40	0.70	0.65	0.60	
	80	0.50	0.50	0.15	0.25	0.45	0.70	0.55	0.60	
	200	0.55	0.60	0.25	0.35	0.60	0.70	0.55	0.65	
	400	0.55	0.60	0.25	0.40	0.60	0.70	0.60	0.65	
	With insulation layer (For requirements on insulation layer see page 36)									
	65	0.55	0.55 (M)	0.25	0.30	0.55	0.80	0.65	0.65	
	80	0.60	0.60	0.25	0.35	0.55	0.80	0.65	0.65	
200	0.60	0.60	0.25	0.35	0.60	0.80	0.65	0.70		
400	0.60	0.65	0.25	0.40	0.60	0.80	0.65	0.70		

The specified values relate to the Cleaneo UFF Plaster Base Board Foil with coating of fumi or KRAFT acoustical plaster.


D134.de Free-Spanning Cleaneo Acoustic Fire Protection Ceiling

12.5 mm Cleaneo Classic boards with Acoustical Fleece and mineral wool

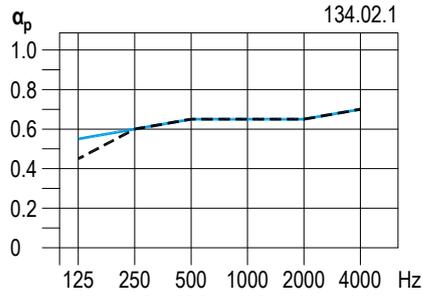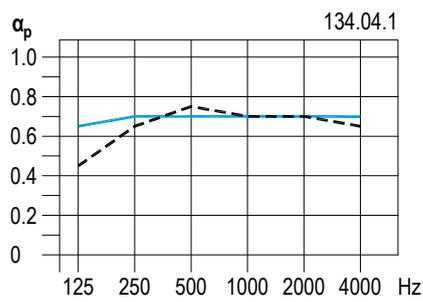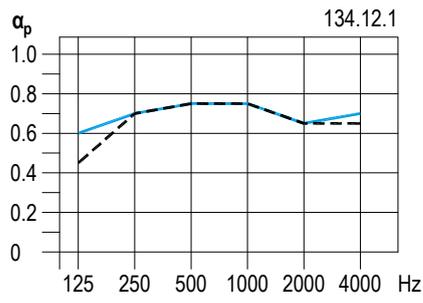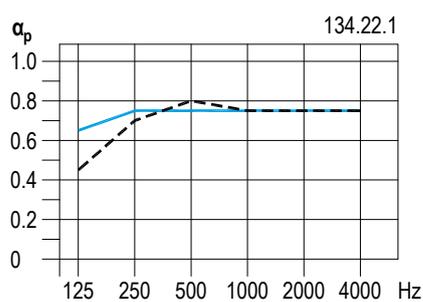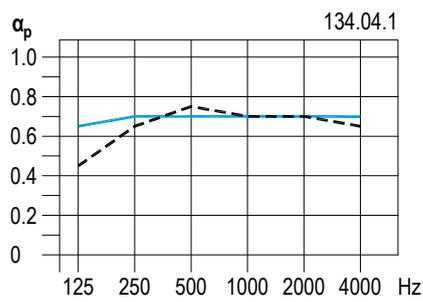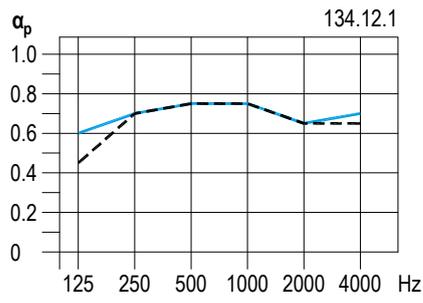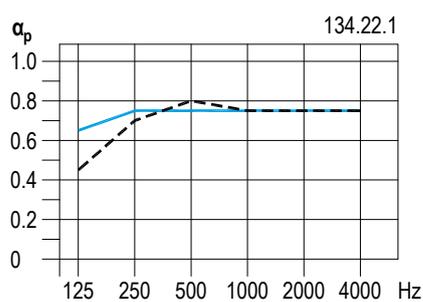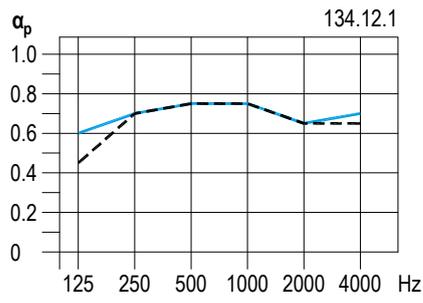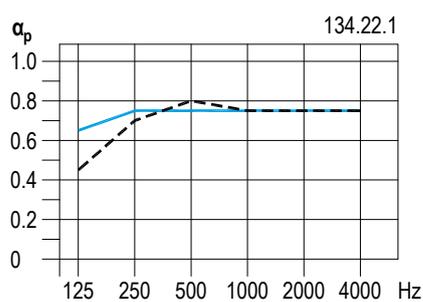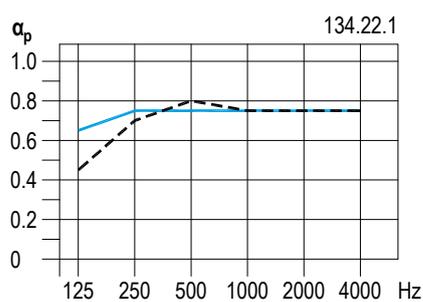Perforation pattern	Con-struction depth mm	NRC	α_w	Frequency-dependent absorption coefficient α_p																																																																																																	
				125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz																																																																																												
Standard circular perforation 8/18 R  Perforation ratio: 15.5 %	With insulation layer (For requirements on insulation layer see page 36)																																																																																																				
	90	0.65	0.65	0.45	0.60	0.65	0.65	0.65	0.65	0.70																																																																																											
	190	0.65	0.65	0.55	0.60	0.65	0.65	0.65	0.65	0.70		Standard circular perforation 12/25 R  Perforation ratio: 18.1 %	With insulation layer (For requirements on insulation layer see page 36)										90	0.70	0.75	0.45	0.65	0.75	0.70	0.70	0.70	0.65		190	0.70	0.70	0.65	0.70	0.70	0.70	0.70	0.70	0.70	Alternating circular perforation 12/20/66 R  Perforation ratio: 19.6 %	With insulation layer (For requirements on insulation layer see page 36)										90	0.70	0.75	0.45	0.70	0.75	0.75	0.65	0.65		190	0.70	0.75	0.60	0.70	0.75	0.75	0.65	0.70	Standard square perforation 12/25 Q  Perforation ratio: 23.0 %	With insulation layer (For requirements on insulation layer see page 36)										90	0.75	0.80	0.45	0.70	0.80	0.75	0.75	0.75		190	0.75	0.75	0.65	0.75	0.75	0.75
Standard circular perforation 12/25 R  Perforation ratio: 18.1 %	With insulation layer (For requirements on insulation layer see page 36)																																																																																																				
	90	0.70	0.75	0.45	0.65	0.75	0.70	0.70	0.70	0.65																																																																																											
	190	0.70	0.70	0.65	0.70	0.70	0.70	0.70	0.70	0.70		Alternating circular perforation 12/20/66 R  Perforation ratio: 19.6 %	With insulation layer (For requirements on insulation layer see page 36)										90	0.70	0.75	0.45	0.70	0.75	0.75	0.65	0.65		190	0.70	0.75	0.60	0.70	0.75	0.75	0.65	0.70	Standard square perforation 12/25 Q  Perforation ratio: 23.0 %	With insulation layer (For requirements on insulation layer see page 36)										90	0.75	0.80	0.45	0.70	0.80	0.75	0.75	0.75		190	0.75	0.75	0.65	0.75	0.75	0.75	0.75	0.75																														
Alternating circular perforation 12/20/66 R  Perforation ratio: 19.6 %	With insulation layer (For requirements on insulation layer see page 36)																																																																																																				
	90	0.70	0.75	0.45	0.70	0.75	0.75	0.65	0.65																																																																																												
	190	0.70	0.75	0.60	0.70	0.75	0.75	0.65	0.70		Standard square perforation 12/25 Q  Perforation ratio: 23.0 %	With insulation layer (For requirements on insulation layer see page 36)										90	0.75	0.80	0.45	0.70	0.80	0.75	0.75	0.75		190	0.75	0.75	0.65	0.75	0.75	0.75	0.75	0.75																																																													
Standard square perforation 12/25 Q  Perforation ratio: 23.0 %	With insulation layer (For requirements on insulation layer see page 36)																																																																																																				
	90	0.75	0.80	0.45	0.70	0.80	0.75	0.75	0.75																																																																																												
	190	0.75	0.75	0.65	0.75	0.75	0.75	0.75	0.75																																																																																												

D134.de Free-Spanning Cleaneo Acoustic Fire Protection Ceiling


12.5 mm Cleaneo Classic boards with Acoustical Fleece and mineral wool

Perforation pattern	Construction depth mm	NRC	α_w	Frequency-dependent absorption coefficient α_p					
				125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
Random 8/15/20 R  Perforation ratio: 9.9 %	With insulation layer (For requirements on insulation layer see page 36)								
	90	0.50	0.50	0.40	0.50	0.50	0.50	0.45	0.45
190	0.50	0.50	0.50	0.50	0.50	0.55	0.45	0.50	

D134.de Test configuration

The construction depth for acoustic fire protection ceilings is defined up to the first, acoustically closed level. For this system it is up to the non-perforated full surface covering.

Scheme drawings | Dimensions in mm

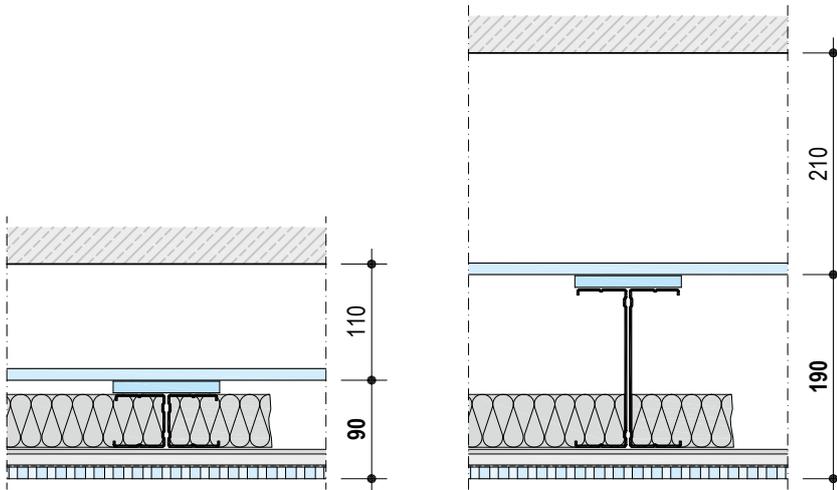





D137.de Free-Spanning Cleaneo Acoustic Board Ceiling

12.5 mm Cleaneo Classic boards with Acoustical Fleece

Perforation pattern	Construction depth mm	NRC	α_w	Frequency-dependent absorption coefficient α_p					
				125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
For this system, the absorption values of system D127.de can be used when the construction depth is taken into consideration.									


Suspenders

Dimensions in mm

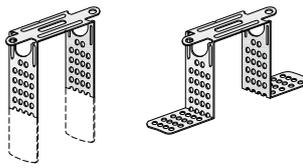Suspension	Drawing	Anchor
0.15 kN (15 kg) load-carrying capacity class		
Direct bracket For CD 60/27	 <p>Bend side tabs</p>	D124.de – 2nd grid level: Anchoring on 1st grid level with Knauf FN 4.3 x 35
		Multi-level ceiling system: Anchor to fire protection ceiling with Knauf FN 4.3x35 or Knauf FN 4.3x65
0.40 kN (40 kg) load bearing capacity class		
Universal Bracket For CD 60/27		Anchoring to the reinforced concrete ceiling with 1x Knauf Ceiling Steel Dowel at centre
	 <p>Bend or cut the Universal Bracket / Damping Universal Bracket according to the required suspension height, screw fix to CD 60/27 (2x metal screws LN 3.5 x 11).</p>	D124.de – 2nd grid level: Anchoring on 1st grid level with 1x Knauf FN 4.3 x 35 at centre
		Multi-level ceiling system: Anchoring to fire resistance ceiling with 1x Knauf FN 4.3 x 35 or 1x Knauf FN 4.3 x 65 at centre
Damping Universal Bracket For CD 60/27		Anchoring to the reinforced concrete ceiling with 1x suitable steel dowels at centre (observe the anchoring length)
Adjustable Universal Bracket For CD 60/27		Anchoring to reinforced concrete ceiling with 1x Knauf Deckennagel ceiling steel dowel at centre
	Adjustable Universal Bracket to be adjusted to suit the required installation height. Connect the upper and lower section with 2x Nonius pins (secure against sliding out).	

Notes Anchoring to basic ceilings made of other building materials with specially approved or standardized anchoring elements.
 Use rigid suspenders only.

Suspenders (continued)

Suspension	Drawing	Anchors	
0.40 kN (40 kg) load bearing capacity class			
<p>Nonius hanger bottom For CD 60/27</p>		<p>Suspended with</p>  <p>Nonius Hanger Top</p> <p>or</p> <p>Nonius Hanger Top</p> <p>and</p>  <p>1x 1x Nonius Pin (secure against slide out)</p> <p>or</p>  <p>2x 2x Nonius clip</p> <p>If required use additional</p>  <p>Nonius connector.</p>	<p>Nonius Hanger Top Anchoring to reinforced concrete ceiling with Knauf Ceiling Steel Dowels</p> <p>Nonius Swing Top Anchoring to the reinforced concrete ceiling with 1x suitable steel dowels at centre (observe the anchoring length)</p>
<p>Nonius stirrup For CD 60/27</p>	 <p>Bend Nonius stirrup around channel and fit together until it snaps in</p>		

Notes

Anchoring to basic ceilings made of other building materials with specially approved or standardized anchoring elements.
Use rigid suspenders only.

D127.de

D124.de

D126U.de

D137.de

D134.de

Construction heights

Dimensions in mm

The construction height of the ceiling results from the sum of suspenders, height of the grid and cladding thickness

Systems	Nonius suspender With Nonius top Nonius stirrup		With Nonius Swing top Nonius stirrup		Grid			
	Nonius suspender	Nonius suspender	Nonius suspender	Nonius suspender	Profile	Total grid height		
D127.de D126U.de	130	130	140	140	CD 60/27 + CD 60/27	54		
D124.de	1st grid level: Carrying and furring channel							
	130	130	–	–	CD 60/27 + CD 60/27	54		
Systems	Direct suspension Universal Bracket		Damping Universal Bracket		Adjustable Universal Bracket		Grid	
	Universal Bracket		Damping Universal Bracket		Adjustable Universal Bracket		Profile	Total grid height
D127.de D126U.de	5 – 180		15 – 190		35 – 85		CD 60/27 + CD 60/27	54
D124.de	1st grid level: Carrying and furring channel							
	5 – 180		–		35 – 85		CD 60/27 + CD 60/27	54
	2nd grid level: Carrying and furring channel							
	5 – 180		–		–		CD 60/27 + CD 60/27	54
Systems	Multi-level ceiling system or 2nd grid level – D124.de Direct Bracket					Grid		
							Total grid height	
D127.de	4					CD 60/27	27	
D124.de	2nd grid level: Furring channel only							
	4					CD 60/27	27	

Calculation examples – determination of construction height

The construction height of the ceiling results from the sum of suspenders, height of the grid and cladding thickness

D127.de – steps		Dimensions in mm	
1	Height of the hanger With Nonius suspender		130
2	Height of grid Carrying channel CD and furring channel CD	+	54
3	Cladding thickness 12.5 mm (Cleaneo Classic board)	+	12.5
4	Sum	=	196.5

Approx. 197 mm required construction height of suspended ceiling

D124.de – steps		Dimensions in mm	
1	Height of suspenders <i>1st grid level:</i> With Nonius suspender <i>2nd grid level:</i> With Universal Brackets		130 +
2	Height of grid <i>1st grid level:</i> Carrying and furring channel CD <i>2nd grid level:</i> Only furring channel CD		60 +
3	Cladding thickness <i>1st grid level:</i> 12.5 mm (GKF) <i>2nd grid level:</i> 12.5 mm (Cleaneo Classic board)		54 +
4	Sum		27 +
		=	12.5 +
			12.5 =
			296

Approx. 296 mm required construction height of suspended ceiling

Planning of joints


Observe the following criteria when planning movement and expansion joints:

- Use control joints in the case of ceiling areas exceeding approx. 15 m in length, e.g. for narrow ceiling spaces caused by a break of a wall.
- Should the free deformation be prevented, for example, by protruding solid components, the spacings must be reduced.
- With heating ceiling systems the side lengths must be reduced to approx. 7.5 m.
- Cooling ceilings with surfaces $\geq 100 \text{ m}^2$ should be subdivided by expansion joints.
- Movement joints have to be transferred into the construction of the board ceilings.
- Separate connections of boards to components made of a different building material, especially columns, or thermally highly stressed built-ins such as lighting fixtures, for instance with shadow gaps.


Examples with reduced free deformation

Expansion joints/movement joints


Hall ceiling with alcoves and protrusions – bay joints

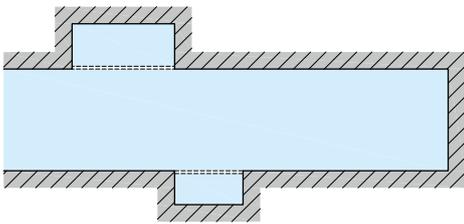

Protruding solid constructions




Protruding wall sections

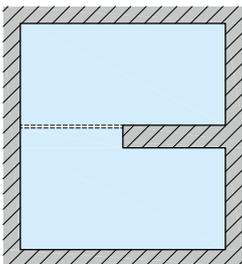


Design analogue to details on page 70

Deflection heads

Hall ceiling with alcoves and protrusions – circumferential deflection heads

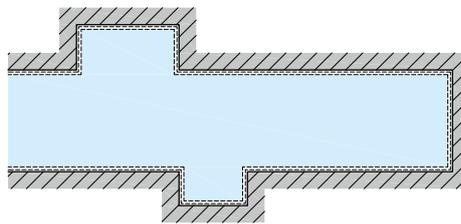

Suspended ceiling with recesses for columns

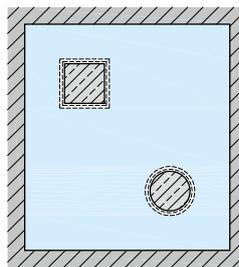

Design analogue to details on page 70

Attachment of loads to Cleaneo Acoustic Board Ceilings

Additional loads, e.g. lighting fixtures, curtain rails and similar can be fixed to Cleaneo Acoustic board ceilings using universal dowel plugs, cavity dowels or spring toggle dowels or Knauf Hartmut Hohlraumdübel cavity dowel. They must be determined for consideration of the load class and/or the maximum room width.

Notes	Heavy loads must be anchored directly on load-bearing building elements (basic ceiling) or on auxiliary constructions.
	As an alternative for free-spanning ceilings, separate rating of the maximum room widths is possible on request.

Each load introduction surface of the Cleaneo Acoustic Board Ceiling may not exceed the weight threshold values of the fastened components:

Permissible weight per ceiling surface in kg/m ²	
Without fire resistance	With fire resistance ¹⁾
Suspended acoustical board ceiling	
15	6 ¹⁾
Free-spanning acoustical board ceiling	
3	3

1) When implemented as a fire protection ceiling with exposed ceiling (Multi-level Ceiling System) 15 kg/m² is the permissible total weight for suspension of the exposed ceiling on the fire protection ceiling (including insulation layer and attached loads).


Furthermore, the following conditions apply:

For every anchoring point the following weights of components attached to the acoustic board ceilings may not be exceeded:

Anchoring method	Permissible weight per anchoring point in kg	
	Without fire resistance	With fire resistance
Suspended acoustical board ceiling		
Fastening in the cladding ²⁾	0.5	0.5
Fastening to the grid	10	10
Free-spanning acoustical board ceiling		
Fastening in the cladding ²⁾	0.5	0.5
Fastening to the grid	3	3


2) Fastening in the cladding not permissible with Cleaneo UFF plaster base board

Fastening in the cladding



Knauf Hartmut Hohlraumdübel cavity dowel
Screw M5


Fastening to the grid



Knauf Universalschraube FN multi-purpose screw e.g. curtain rail

In order to avoid a local overload of the ceiling, it is necessary to comply with the minimum spacings between the individual fastened loads. The minimum spacing between two anchoring points is dependent on both effective radii of the individual loads.


The effective radius of the individual load can be taken from the following diagram in dependence on the permissible weight per unit area for additional loads:

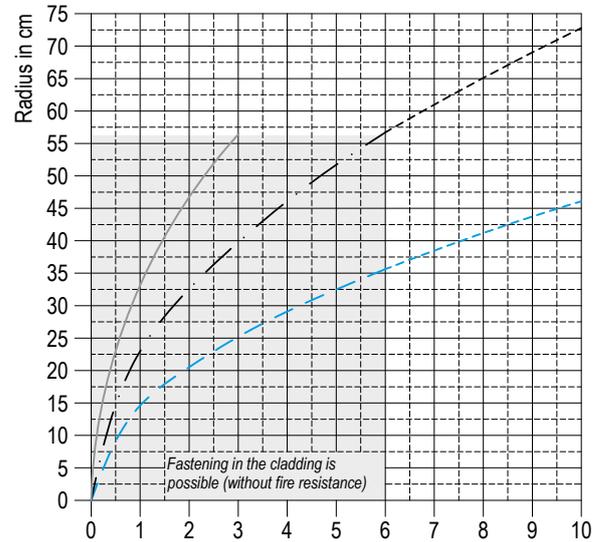

Point load in kg

- 3 kg/m² permissible additional weight (on the exposed ceiling under a fire protection ceiling, see page 74)
- · - 6 kg/m² permissible additional weight (with fire resistance)
- - - 15 kg/m² permissible additional weight (without fire resistance)

Example of an attachment scheme with 15 kg/m²

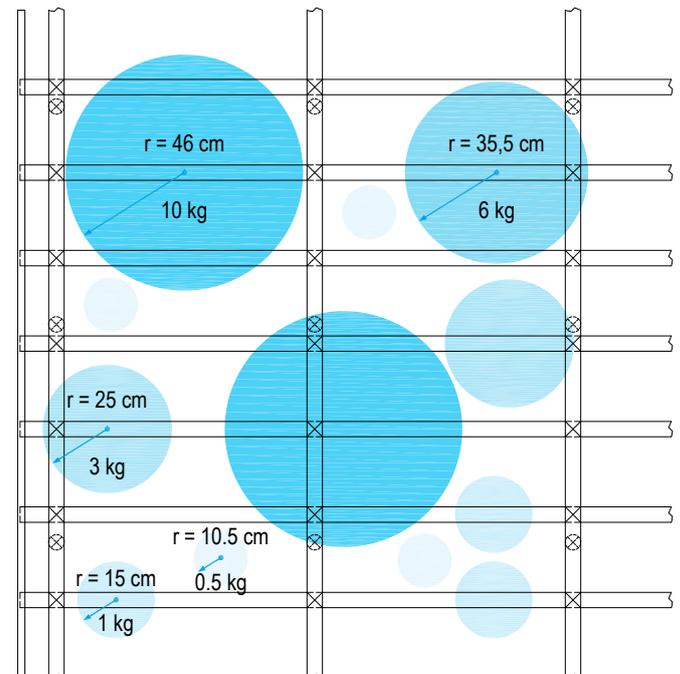

Notes

The attached loads can be introduced with several anchoring elements.


For attachment of loads with "multi-level ceiling system" see page 74

Details

Scale 1:5 | Dimensions in mm


D127.de-A1 Connection to wall – exposed joint

Without fire resistance

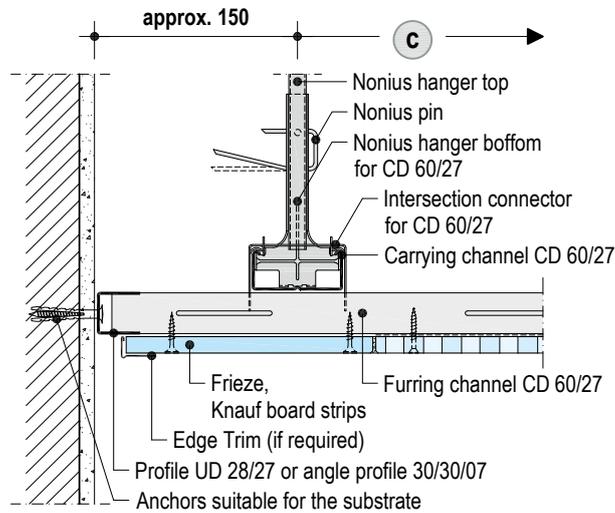


D127.de-D3 Connection to wall – jointed frieze

Without fire resistance

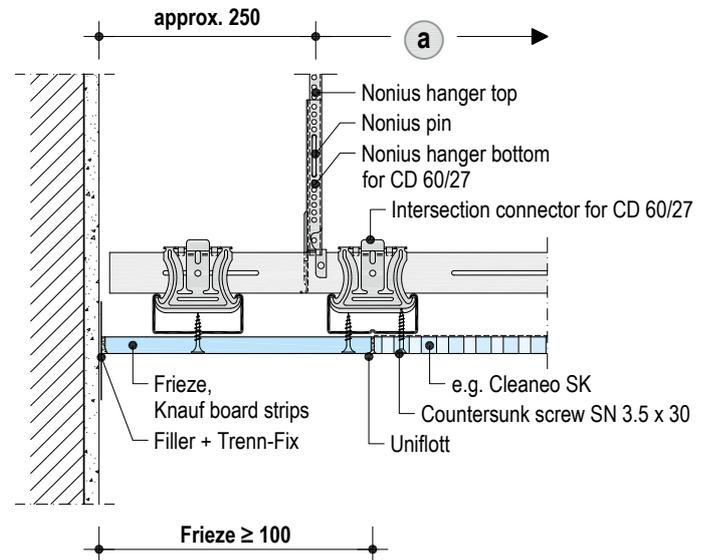


D127.de-D4 Connection to wall – unjointed frieze

Without fire resistance

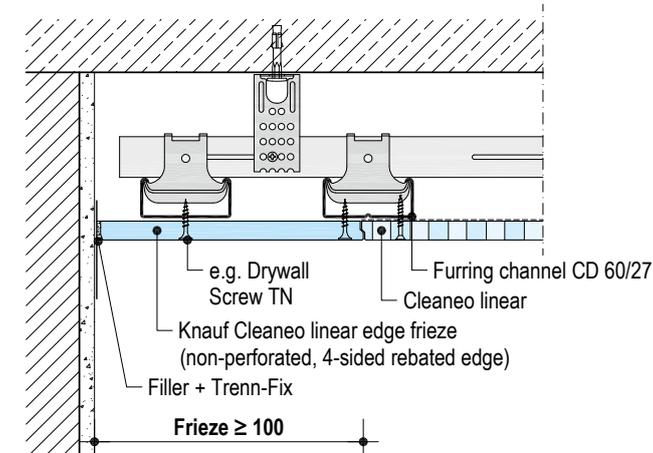

D127.de-D2 Connection to wall – frieze exposed joint

Without fire resistance

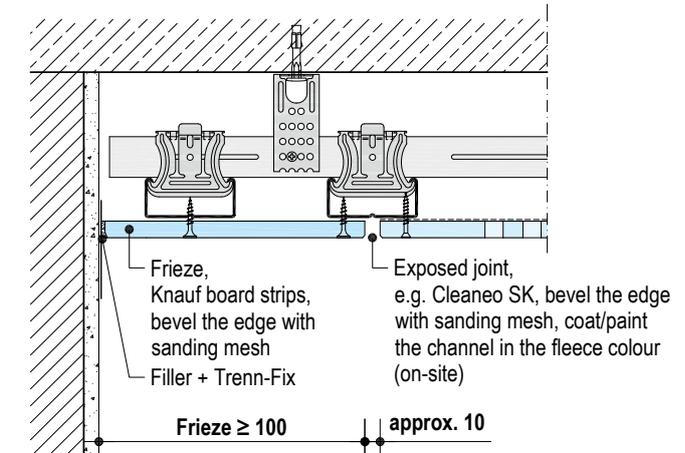


D127.de
D124.de
D126U.de
D137.de
D134.de

Details


D127.de-B3 Long edge – UFF

Without fire resistance | Continuous perforation

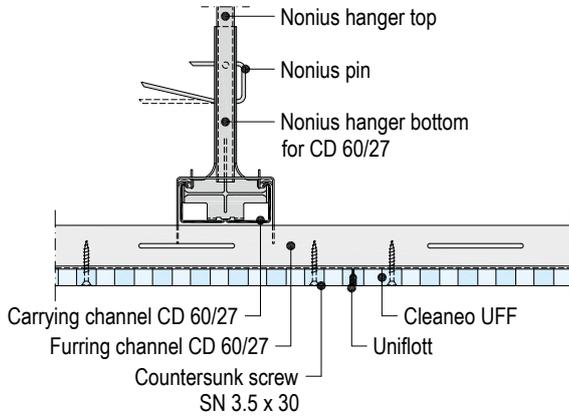


D127.de-B1 Long edge – HRK (half-rounded edge)

Without fire resistance | slotline

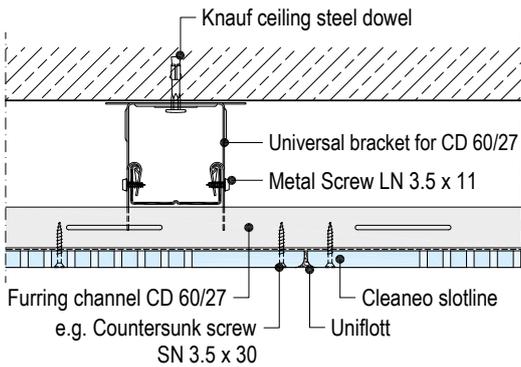


D127.de-B2 Long edge – 4SK (4-side square edge)

Without fire resistance | Continuous perforation

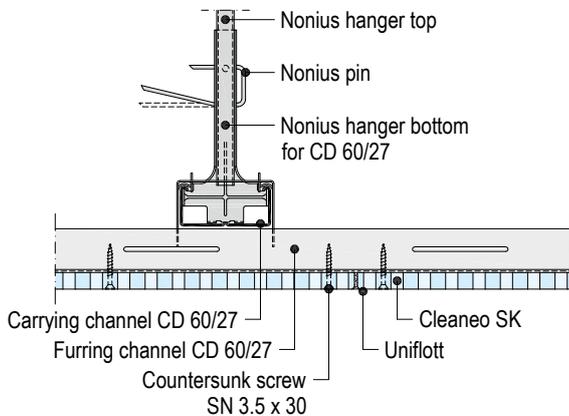


D127.de-C1 Front edge – 4SK (4-sided square edge)

Without fire resistance | Continuous perforation

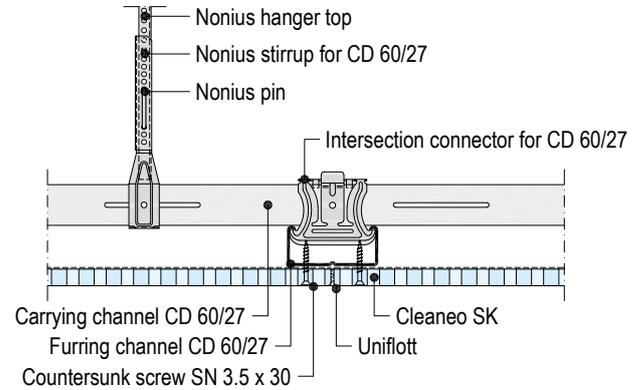


D127.de-C2 Front edge – 4AK (4-sided tapered edge)

Without fire resistance | Block perforation

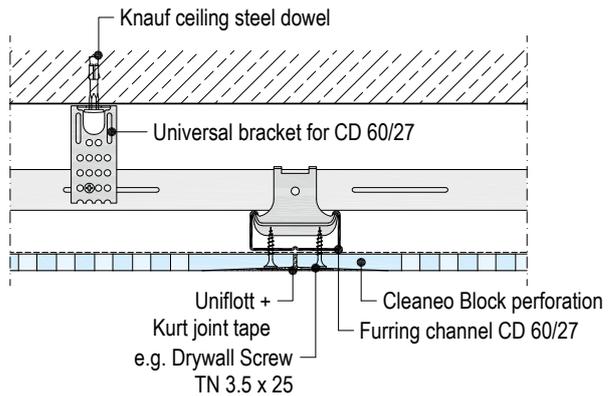

D127.de-C3 Front edge – linear

Without fire resistance | Continuous perforation 8/18 R

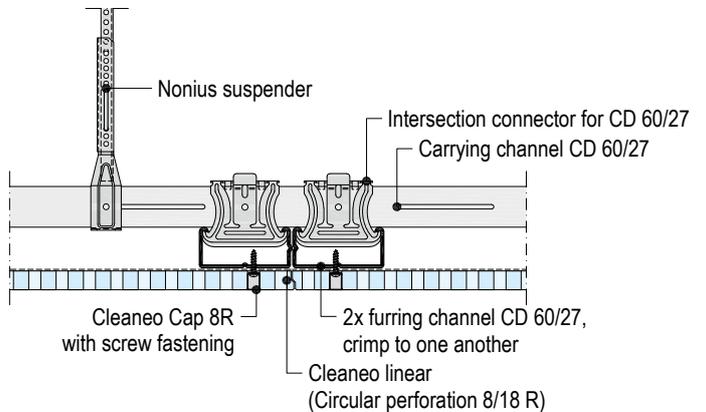


Further data for fixing boards with Cleaneo-Caps see page 80

Details


Scale 1:5 | Dimensions in mm

D127.de-A2 Crown frieze – Horizontal shadow gap

Without fire resistance

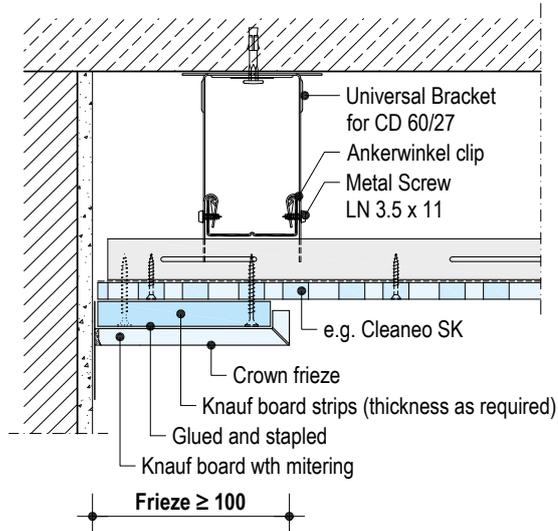


Variant


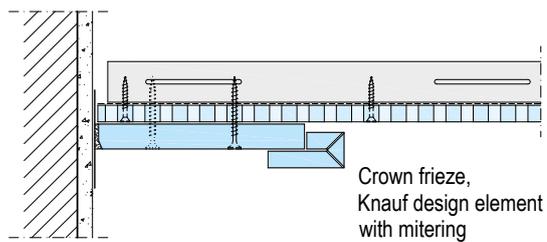


D127.de-D1 Crown frieze

Without fire resistance

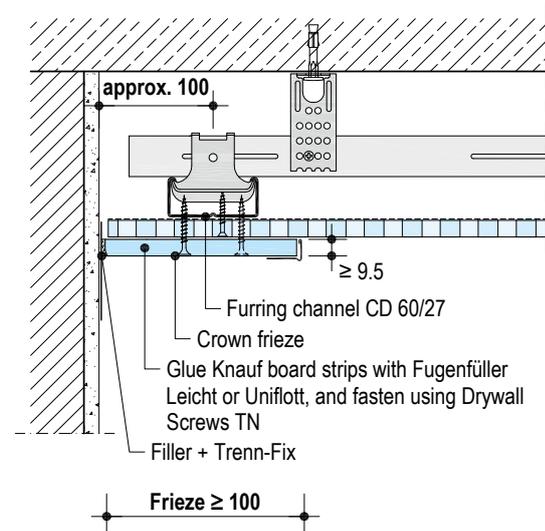


Variants

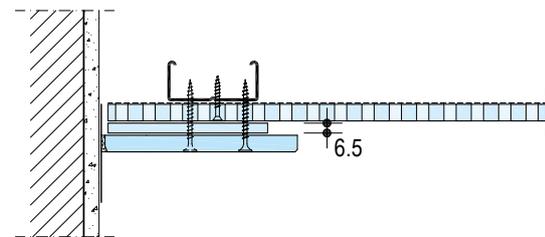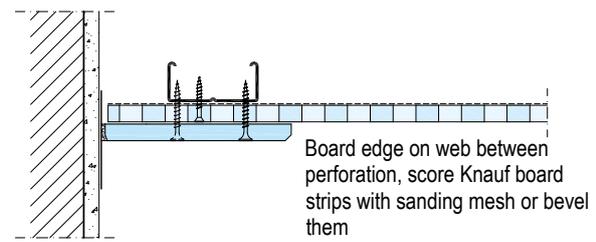

Details


D127.de-A100 Connection to wall – Designpanel

Without fire resistance

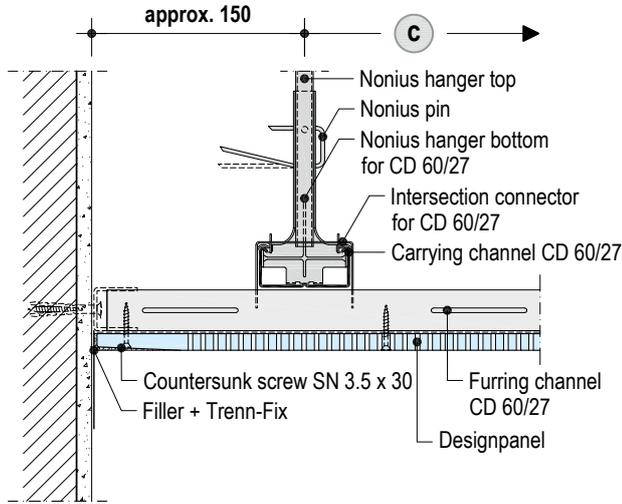

D127.de-B100 Long edge – Designpanel


Without fire resistance

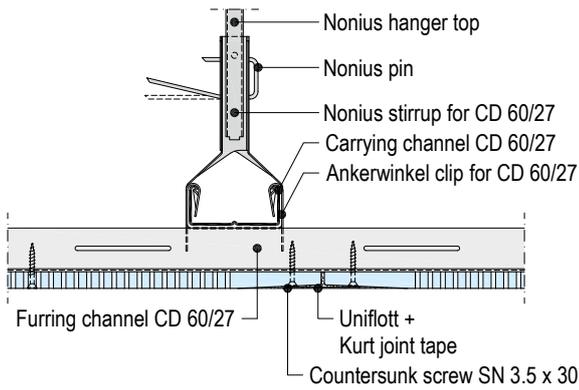

D127.de-D100 Connection to wall – Designpanel


Without fire resistance

Scale 1:5 | Dimensions in mm

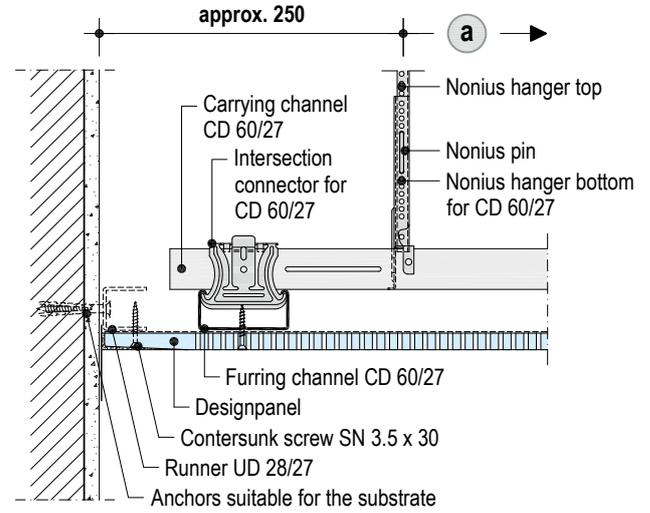

D127.de-C100 Front edge – Designpanel

Without fire resistance

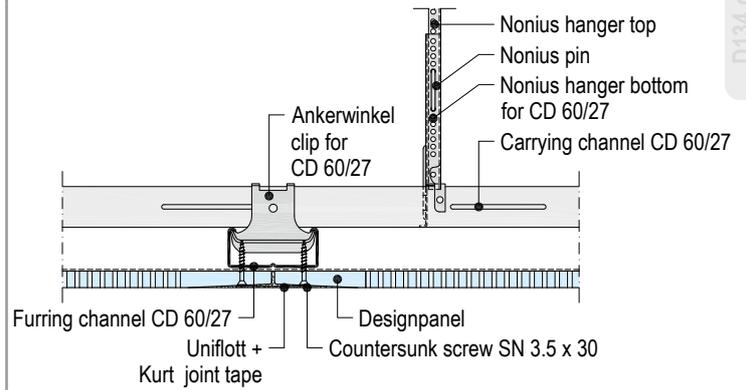

D127.de

D124.de

D126.de


D137.de

D134.de

Details

D124.de-vu-A1 Connection to wall

2nd grid level: Furring channel only

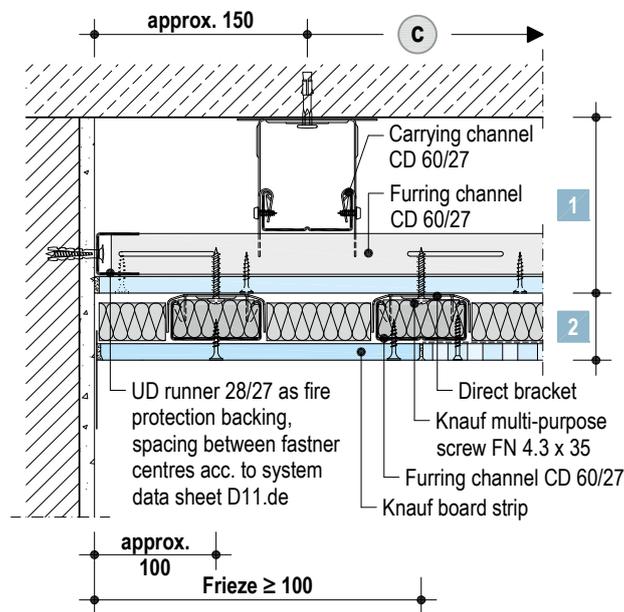


plus Extension of the fire resistance proof of usability
Prior consultation in acc. to page 5 recommended

Scale 1:5 | Dimensions in mm

D124.de-vu-B1 Long edge

2nd grid level: Furring channel only

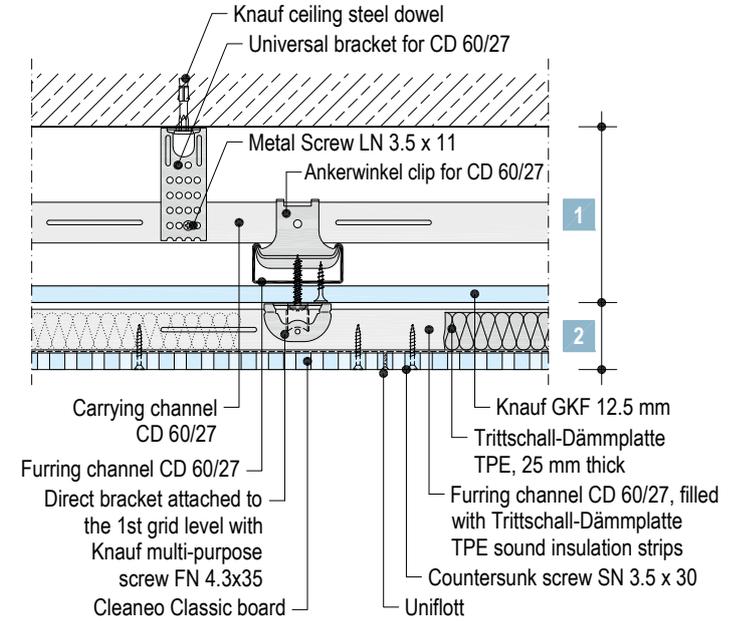

plus Extension of the fire resistance proof of usability
Prior consultation in acc. to page 5 recommended


- 1 1st grid level
- 2 2nd grid level

Details

Scale 1:5 | Dimensions in mm

D124.de-vu-A2 Connection to wall


2nd grid level: Carrying and furring channel

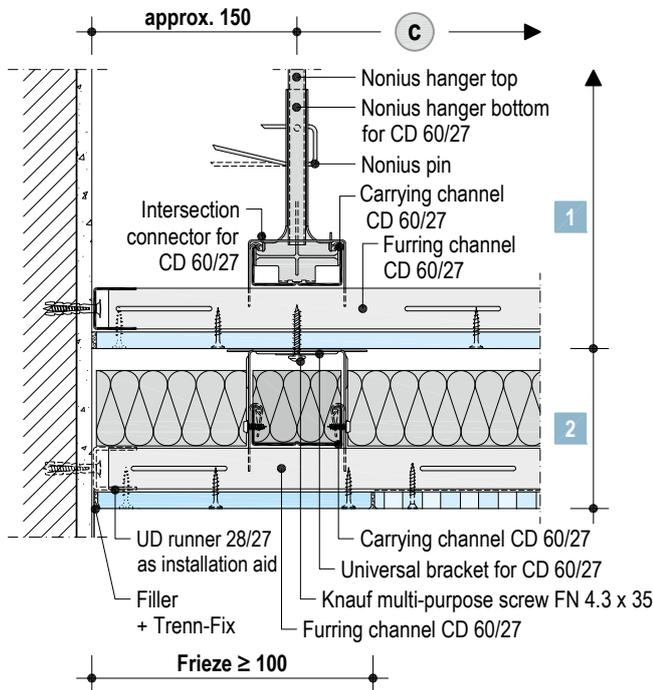

plus Extension of the fire resistance proof of usability
Prior consultation in acc. to page 5 recommended

D124.de-vu-C1 Front edge

2nd grid level: Carrying and furring channel

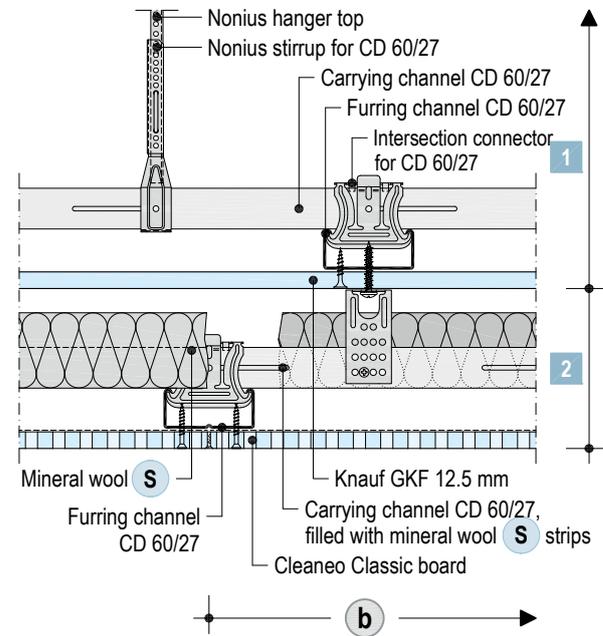

plus Extension of the fire resistance proof of usability
Prior consultation in acc. to page 5 recommended


- 1 1st grid level
- 2 2nd grid level

S Mineral wool insulation layer acc. to EN 13162
Non-combustible
Thickness ≥ 50 mm, density ≥ 50 kg/m³
Melting point ≥ 1000 °C; acc. to DIN 4102-17
(insulating material, e.g. from Knauf Insulation)

Details


D126U.de-A1 Connection to wall

Without fire resistance

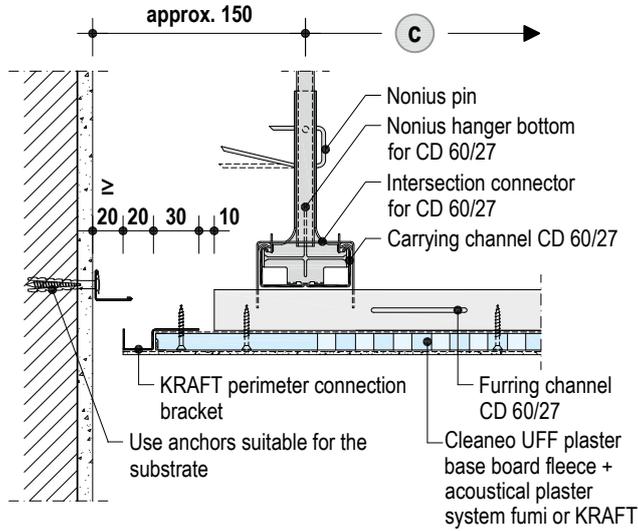

D126U.de-D1 Connection to wall


Without fire resistance

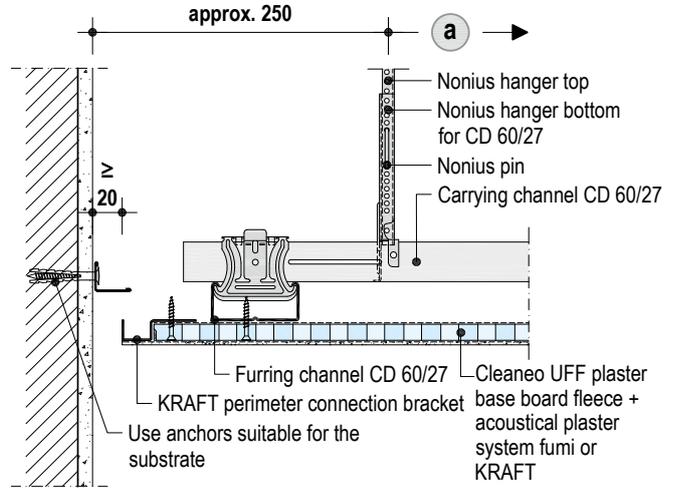

Scale 1:5 | Dimensions in mm


D126U.de-A2 Connection to wall

Without fire resistance

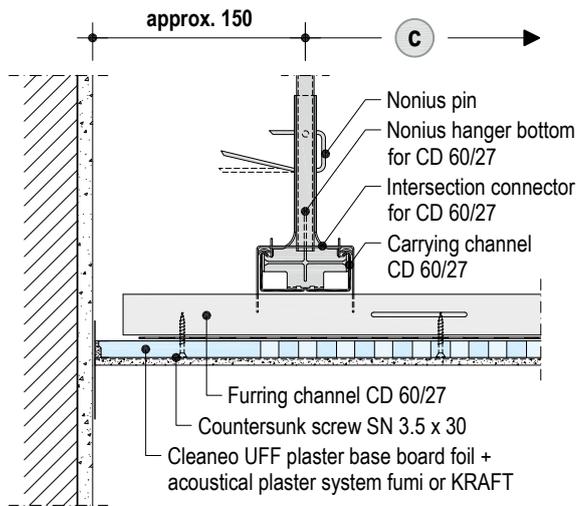

D126U.de-D2 Connection to wall

Without fire resistance

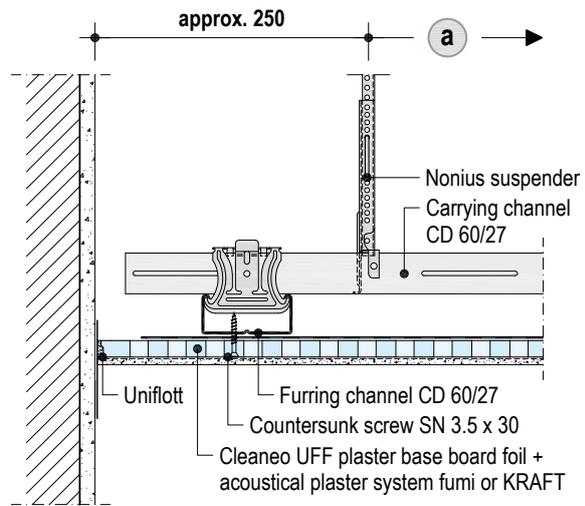


Details

Scale 1:5 | Dimensions in mm


D126U.de-A3 Connection to wall – Crown frieze

Without fire resistance

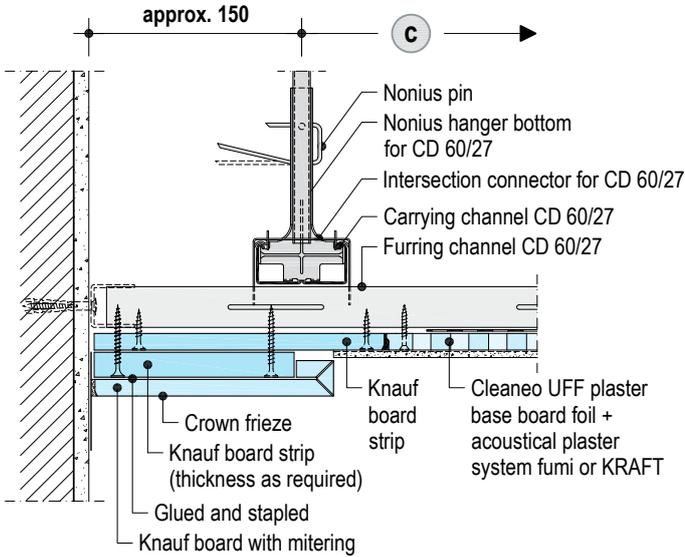


D126U.de-D3 Connection to wall – Crown frieze

Without fire resistance

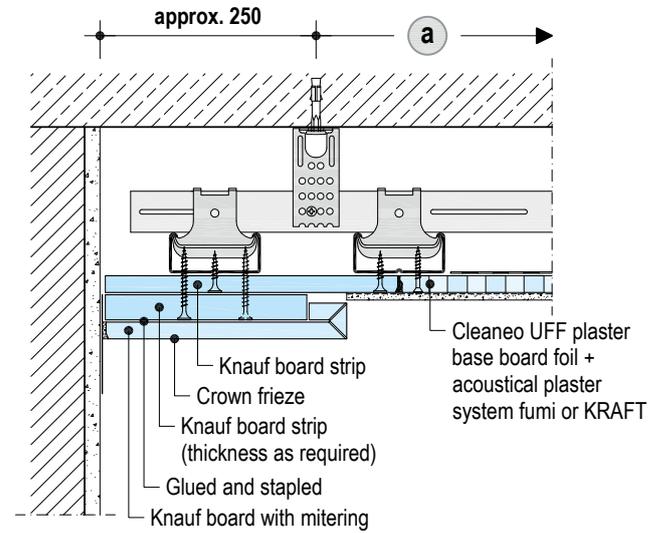


D126U.de-B1 Long edge

Without fire resistance

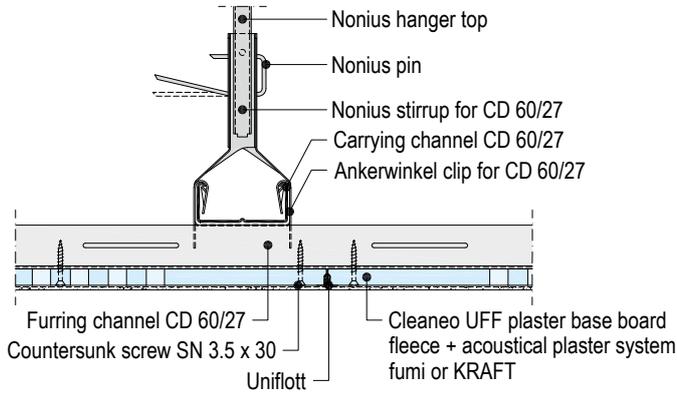

D126U.de-C1 Front edge

Without fire resistance

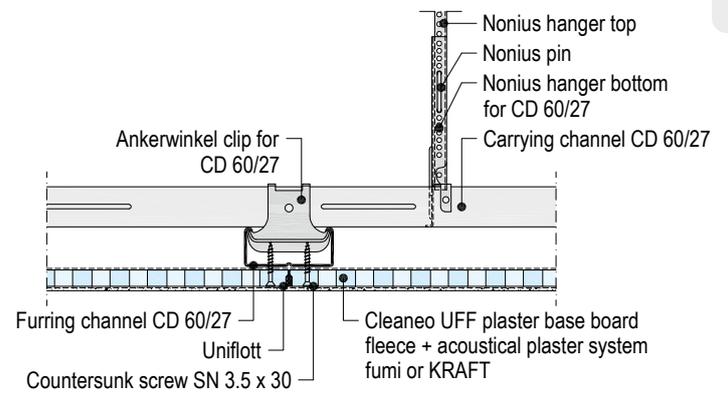


D127.de
D124.de
D126U.de
D137.de
D134.de

Details


D137.de-D1 Load bearing connection to wall

Without fire resistance

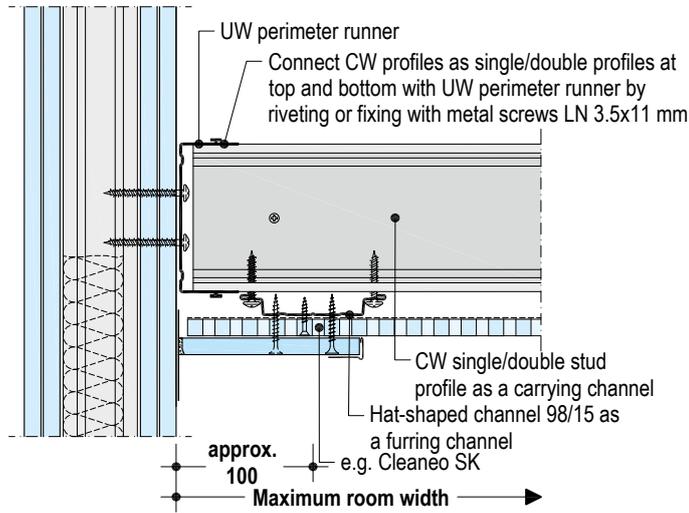


D137.de-A1 Structural connection to wall

Without fire resistance

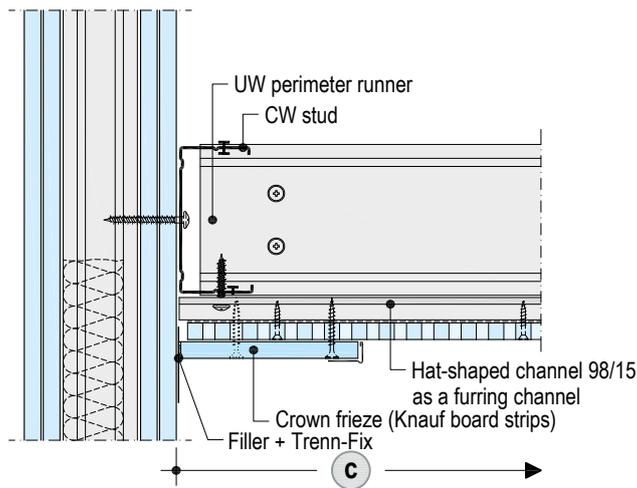

D137.de-D2 Load bearing connection to wall – Frieze


Without fire resistance

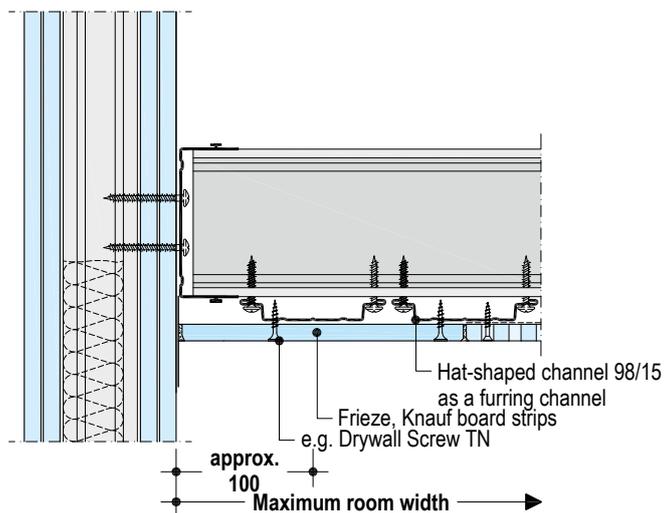

D137.de-B1 Front edge


Scale 1:5 | Dimensions in mm

Without fire resistance

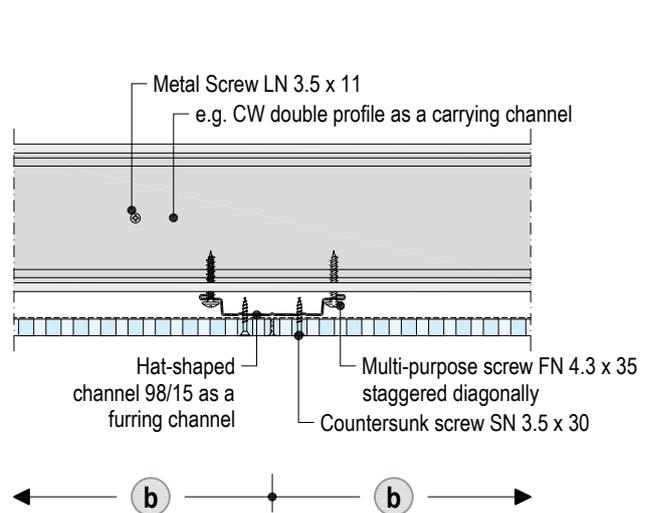


D137.de-C1 Long edge

Without fire resistance

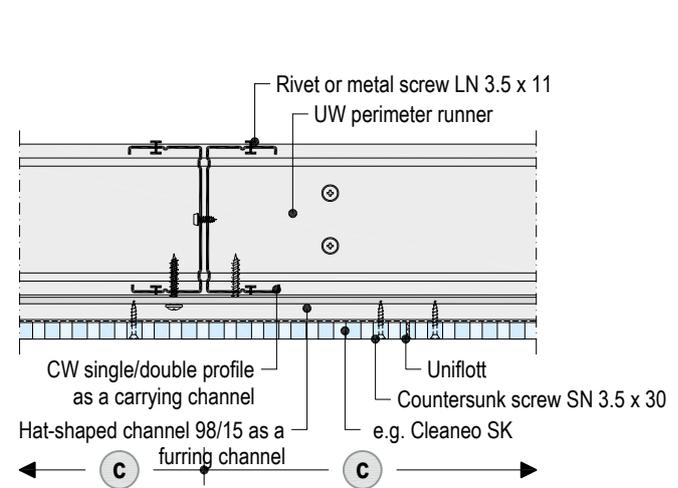

D137.de-B10 Front edge


Without fire resistance

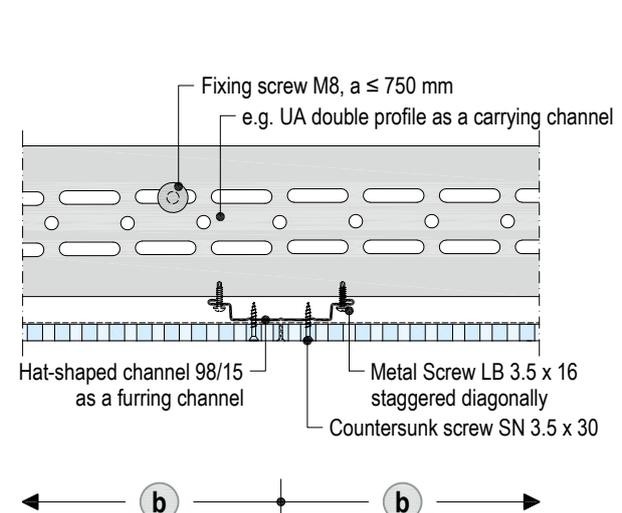

Details


Scale 1:5 | Dimensions in mm

D134.de-vuvo-D1 Load bearing connection to wall

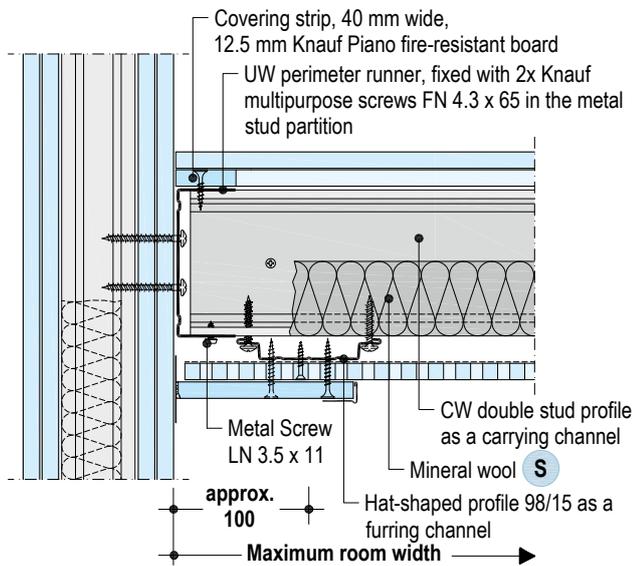


plus Extension of the fire resistance proof of usability
Prior consultation in acc. to page 5 recommended

D134.de-vuvo-A1 Structural connection to wall

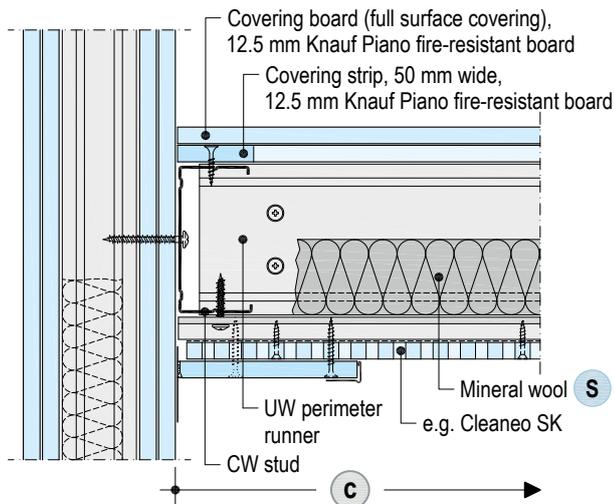


plus Extension of the fire resistance proof of usability
Prior consultation in acc. to page 5 recommended


D134.de-vuvo-D2 Load bearing connection to wall – Shadow gap

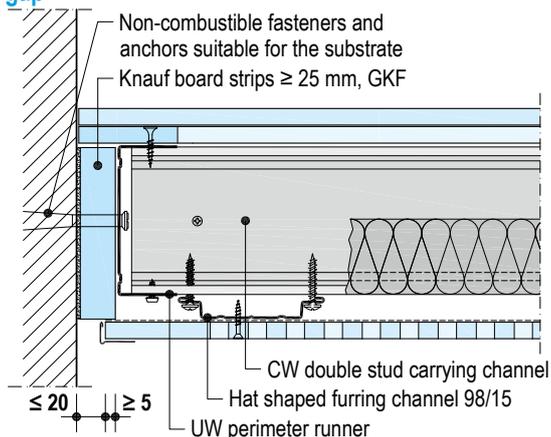

D134.de-vuvo-B1 Front edge

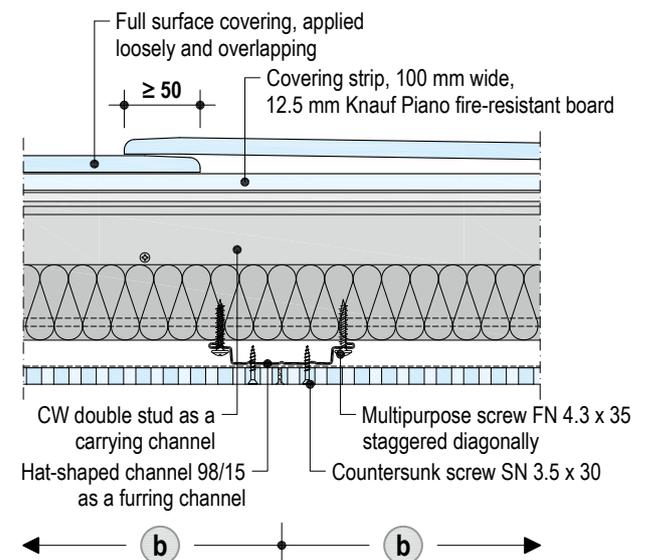

D134.de-vuvo-C1 Long edge

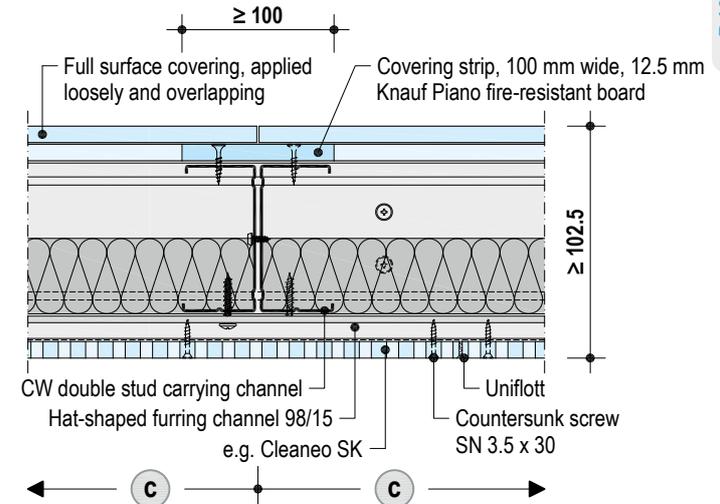


S Mineral wool insulation layer acc. to EN 13162
Non-combustible
Thickness ≥ 50 mm, density ≥ 50 kg/m³
Melting point ≥ 1000 °C; acc. to DIN 4102-17
(insulating material, e.g. from Knauf Insulation)

Expansion joints/movement joints


D127.de-SO12 Expansion joint – Long edge

Without fire resistance

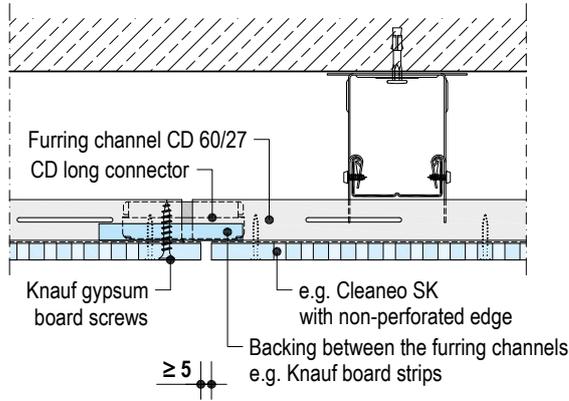

D126U.de-C4 Movement joint

Without fire resistance

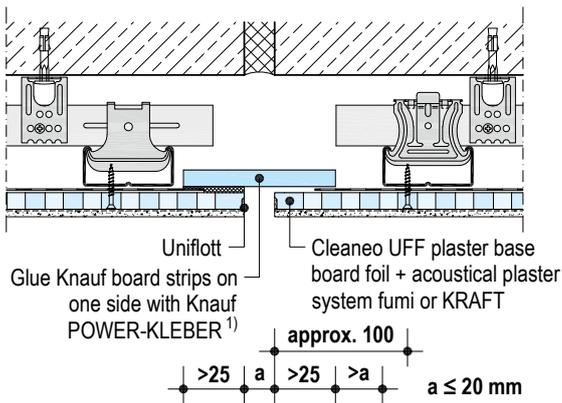


1) Knauf Bauprodukte GmbH

Scale 1:5 | Dimensions in mm


D127.de-SO13 Movement joint

Without fire resistance

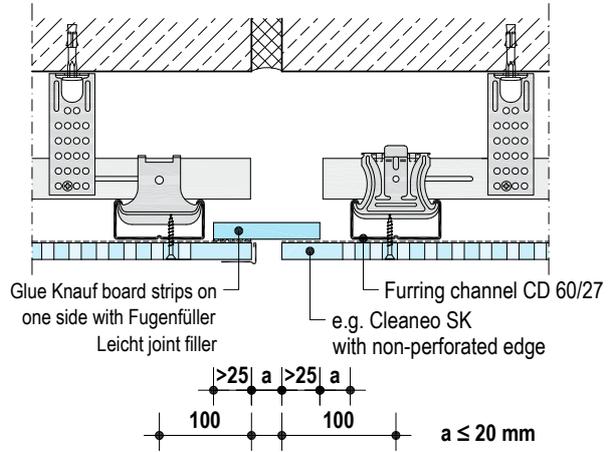

D126U.de-C2 Movement joint

Without fire resistance

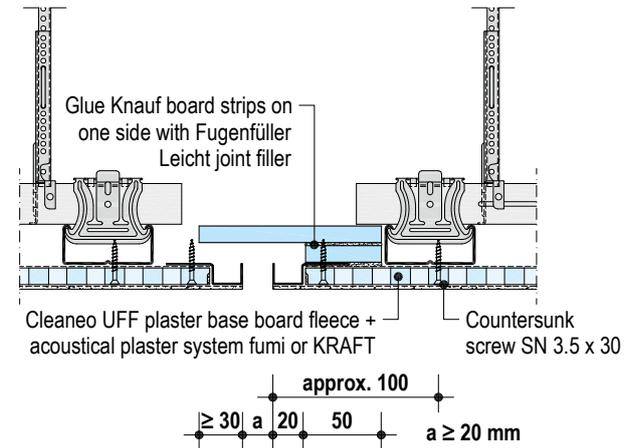


Details

Scale 1:5 | Dimensions in mm


D127.de-SO14 Ceiling connection to furring

Without fire resistance

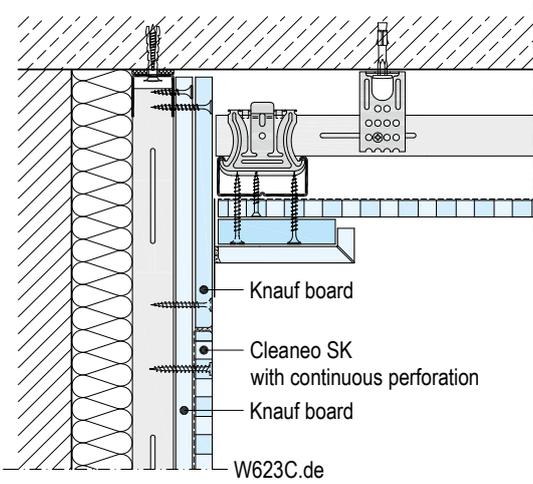


D127.de-SO15 Ceiling connection to partition

Without fire resistance

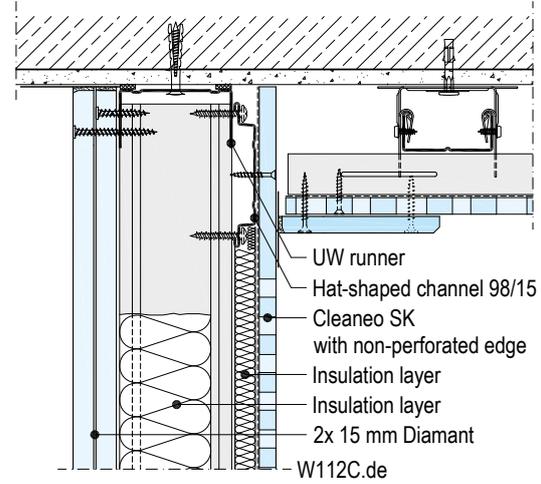


D127.de-SO7 Canopy

Without fire resistance

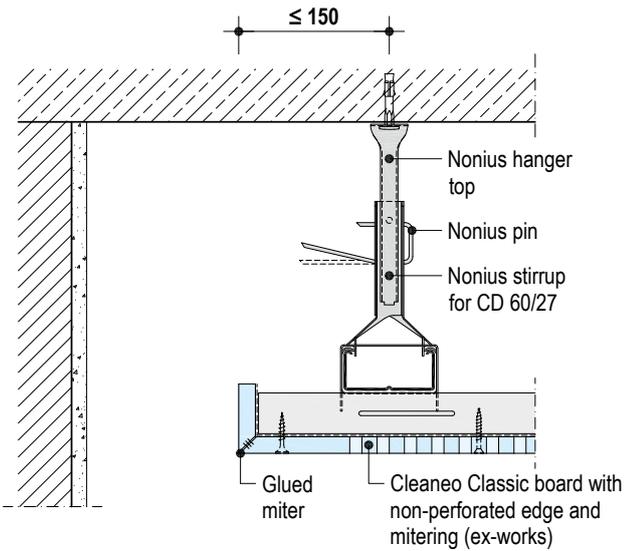


D127.de-SO3 Split level ceiling

Without fire resistance

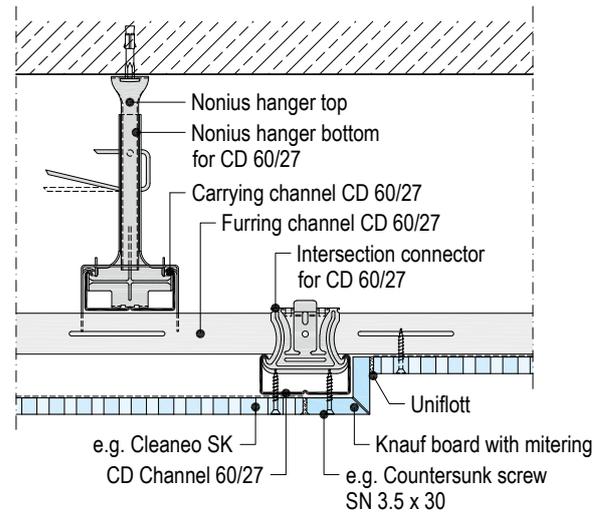


Variant

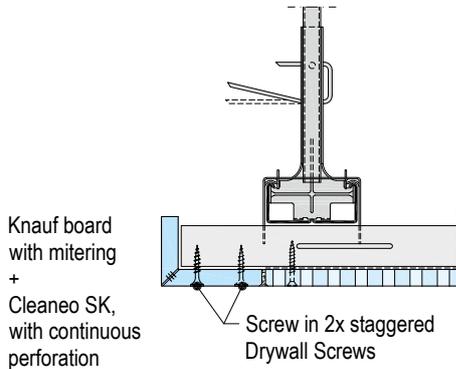

D127.de-SO16 Ceiling spotlight installation

Without fire resistance

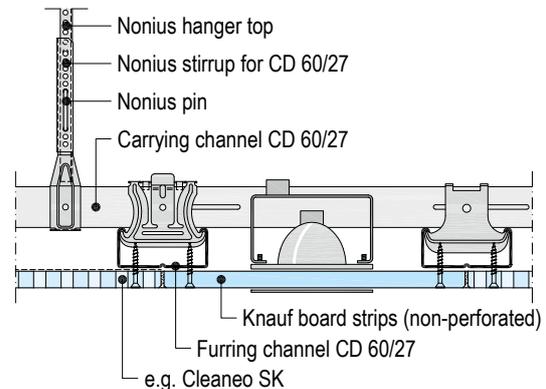


Access panel for Cleaneo Acoustic Board Ceilings

Scheme drawings | Dimensions in mm

General grid design

Top view

Double layer profile e.g. D127.de

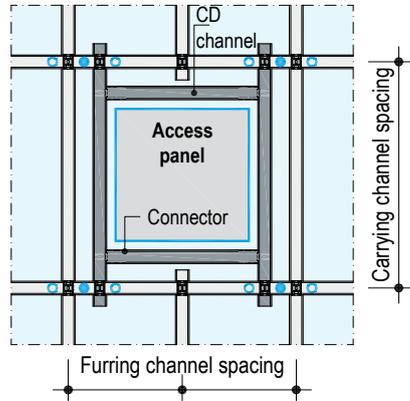

Legend


	Additional grid
	4 additional suspension points (e.g. Nonius suspension)
	Alternative suspension points

Universal connectors are required for the trimmers. Further suspenders are required if the suspended profiles are to be exchanged.

Knauf access panel REVO Lochplatte 12.5


Installation with Cleaneo Classic or Designpanel

Vertical section

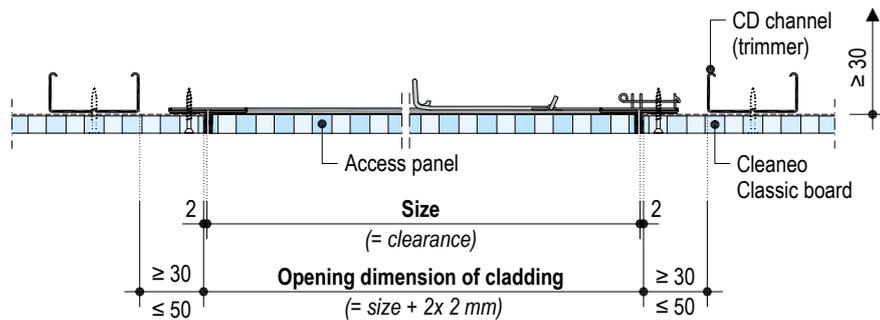

Ceiling bottom view

Design, e.g. standard square perforation 12/25 Q

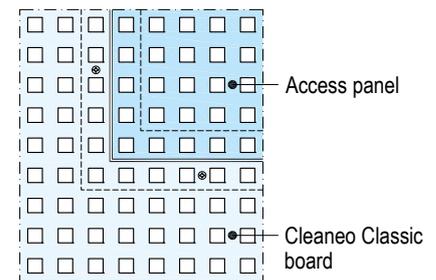

Notes


Cladding thickness, dimensions, available options and further information, see product data sheet [REVO perforated board 12.5 E112C.de](#).

Observe the enclosed installation instructions of the access panels.


Knauf access panel REVO 12.5

Installation with Cleaneo UFF plaster base

Vertical section

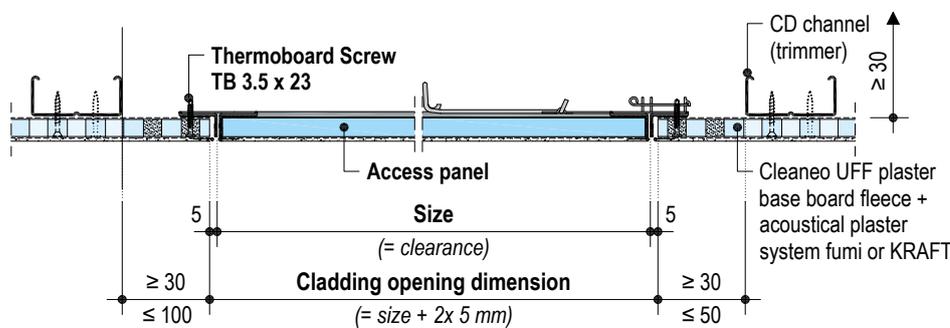

Ceiling bottom view

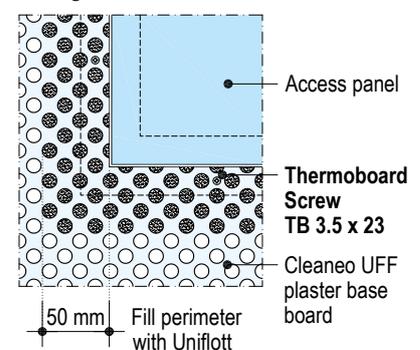

Notes

Screw fix the frame of the access panel at entire perimeter with **Thermoboard screws TB 3.5 x 23 mm**.


Dimensions, available options and further information, see product data sheet [REVO 12.5 E112.de](#).

Observe the enclosed installation instructions of the access panels.


Scale 1:5 | Dimensions in mm

Fire resistance encasement F30 for lighting fixtures


D134.de-SO-C1 Lighting fixture – cross-section

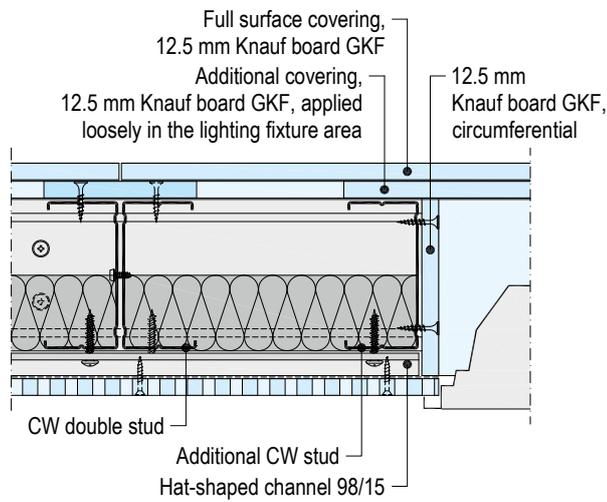

D134.de-SO-C2 Lighting fixture – cross-section

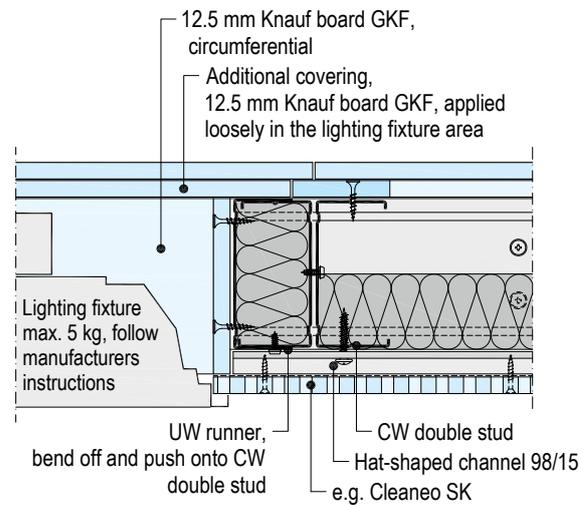


D134.de-SO-B1 Lighting fixture – longitudinal section

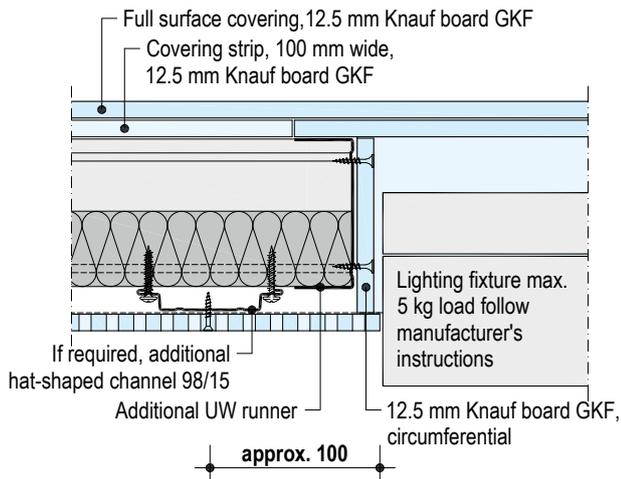


Top view

Scheme drawings | Dimensions in mm

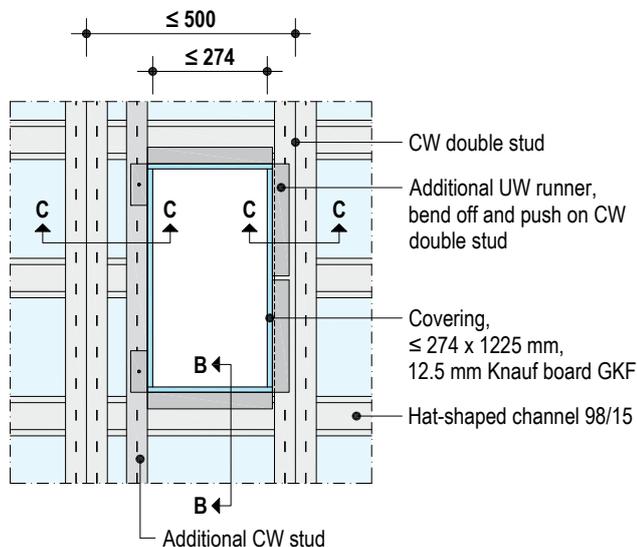

Exposed ceiling under fire protection ceiling

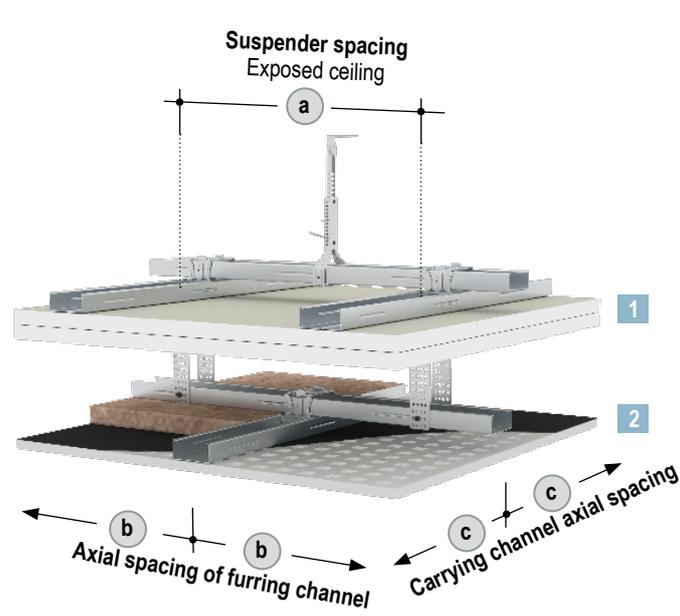


Legend

- 1 Fire protection ceiling e.g. D112.de
- 2 Revealed ceiling D127.de


Detail

D127.de-SO8 Front edge – multi-level ceiling system

Scale 1:5

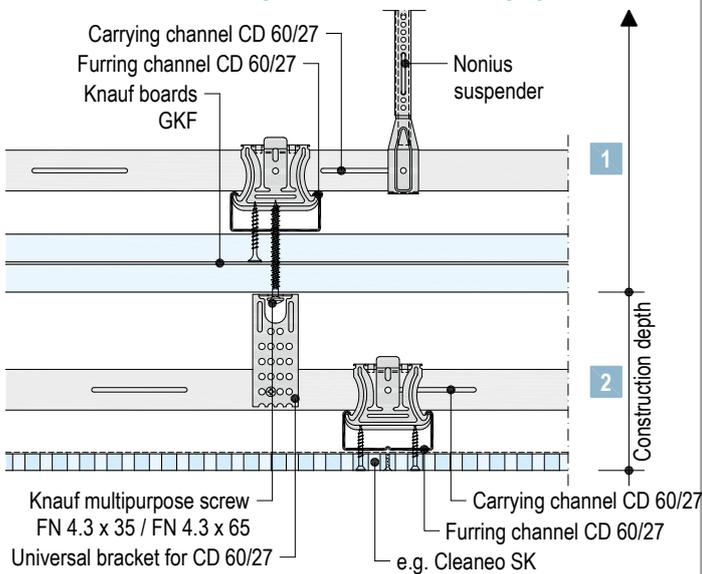

Revealed ceiling - alternative:

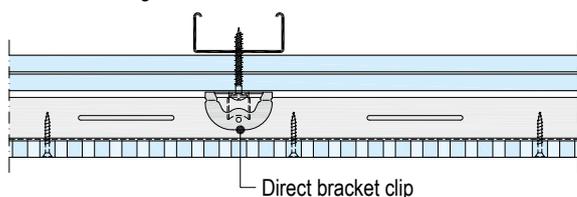

1 Axial spacings fire protection ceiling

The additional load of the suspended ceiling (exposed ceiling $\leq 0.15 \text{ kN/m}^2$) must be considered with the grid of the fire protection ceiling, see system data sheet [D11.de Knauf Board Ceiling](#) section "Dimensioning of the grid". The spacings of the fire protection ceiling grid result from the specifications of the respective system ceilings taking the additional weight of the exposed ceiling into consideration.


2 Max. axial spacings of exposed ceiling

Dimensions in mm

Axial spacing of furring channel of the fire protection ceiling = Suspenders spacings ¹⁾ of the exposed ceiling	Axial spacings carrying channel	Axial spacings furring channel	Cleaneo Acoustic board ceiling
a	c	b	
≤ 312.5	Alternating (see below)	≤ 1000	Dependent on the design and perforation see section "Board design".
≤ 400	Alternating (see below)	≤ 800	
≤ 500	In every furring channel	≤ 1200	
≤ 625	In every furring channel	≤ 1000	
≤ 800	In every furring channel	≤ 800	

1) Load class in kN/m^2 up to 0.15

Alternating fastening of the suspenders of the exposed ceiling

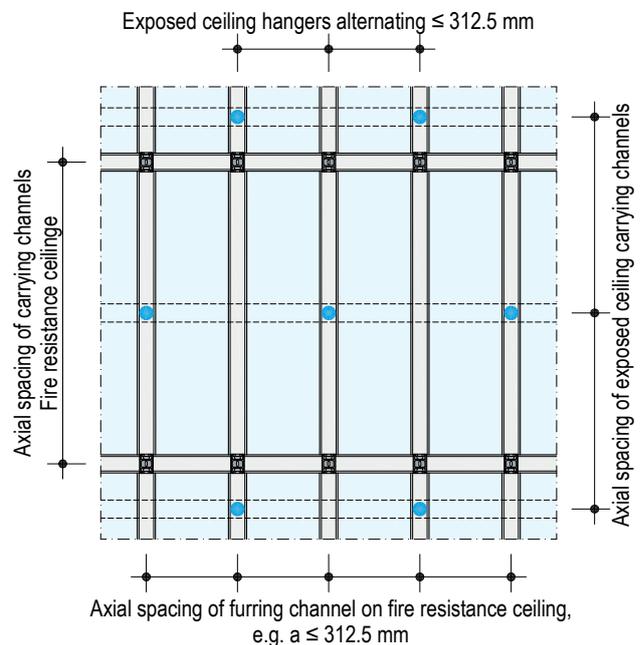

● Suspenders of exposed ceiling

Suspension must be fastened to the furring channels of the fire protection ceiling.

Notes

Fire protection ceiling: System D112.de, D113.de or D116.de possible (see system data sheet [D11.de Knauf Board Ceilings](#)).

Always apply suspended channels of exposed ceiling lateral to furring channel of the fire resistance ceiling.

Load of exposed ceiling per suspension point maximum 100 N.

plus Extension of the fire resistance Proof of Usability

- Due to multi-level ceiling system design Prior consultation in acc. to page 5 is recommended.

Installation of the grid

Anchoring to basic ceilings

Anchoring of the suspension must be undertaken using anchors suitable for the substrate:

- Made of reinforced concrete: Knauf Deckennagel ceiling steel dowels / suitable steel dowels
- Made of other building materials: Specially approved or standardized anchoring elements for the building material.

Note The dampening rubbers may only be slightly compressed when the swing suspenders are anchored.

With system D124.de, anchor the Universal Brackets/Direct Brackets of the 2nd grid level in the furring channels of the 1st grid level with Knauf multi-purpose screw FN 4.3x35.

Suspension

Suspension of the carrying and furring channels exclusively with suspenders acc. to page 54 and page 55.

Refer to the system tables in the "Data for planning" section for the anchoring spacings on ceilings and profiles.

Connection to wall

Perimeter connection profile UD 28/27 as a load bearing connection, installation aid or with fire resistance.

Anchoring to the substrate with suitable fasteners/anchors, spacing maximum 1 m (non-load bearing) or 625 mm (load-bearing).

Further information for application as a load-bearing or non-load bearing connection, see system data sheet [D11.de Knauf Board Ceilings](#).

Note With system D124.de, a load-bearing connection in acc. to system data sheet [D11.de Knauf Board Ceilings](#) may be required for frieze application. Observe permissible overhangs of the cladding and the grid.

Scheme drawings



Profiles

Connect the carrying channels with suspenders and align flush at the required suspension height.

With system D124.de, clip in the 2nd grid level as a construction variant with single layer profile grid furring channels into the Direct Brackets.


Profile connections

Implement the longitudinal joints of the carrying and furring channel CD with CD longitudinal connectors. Stagger all profile joints.

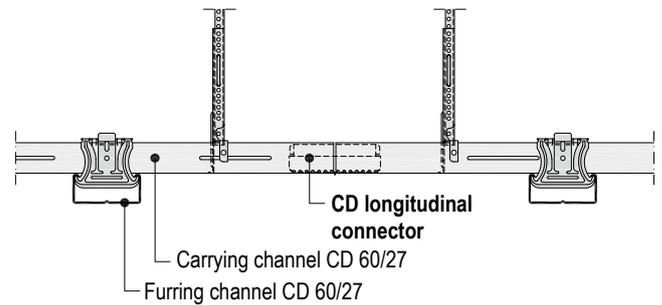



With a double layer profile grid, the connection of the carrying and furring channels as the intersections is undertaken with:

- Intersection connectors for CD 60/27:
Before the installation, bend to 90° and after installation close the clip lock to ensure a secure hold.

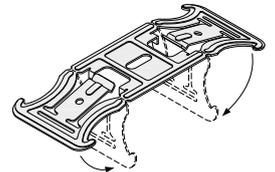

- 2x Ankerwinkel clips for CD 60/27 (alternative)

Bend with assembly.

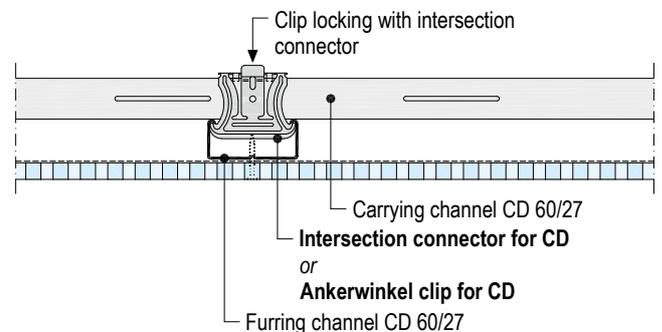

Installation of the grid – free-spanning CW profiles

Carrying channel

Carrying channels made of Knauf CW profiles as single or double profiles. In case of fire protection requirements, only double profiles are permissible. Double profile: Screw fastening with metal screws LN 3.5 x 11 at spacings of ≤ 750 mm.

Load-bearing connection to wall

Apply a load-bearing perimeter connection made of UW profiles.

Anchoring acc. to table below.

Connect CW profiles as double profiles at the web with metal screws LN 3.5 x 11 at a spacing of max. 750 mm.

Support of the CW profiles in the UW runners ≥ 30 mm. Connect the upper and lower flanges of the UW runner / CW profiles (with double profiles both flanges) by riveting, screw fixing or crimping. For system D134.de the connection of the upper flanges is not necessary.

Structural connection to wall

Apply a structural perimeter connection made of UW runners or CW profiles.

Distance between fastener centres maximum 625 mm. Fasten to solid walls with Knauf nailable plugs, on lightweight partitions with Knauf multi-purpose screws FN 4.3 x 65 in every stud of the partition.

Furring channels

Fasten the hat-shaped channel as a furring channel laterally to the free-spanning carrying channels CW at the necessary axial spacing (dependent on the design and perforation) using 2 diagonally offset multi-purpose screws FN 4.3 x 35 at every junction point. (With carrying channel UA use metal screws LB 3.5 x 16).

Additional measures with system D134.de

Attach Knauf Piano fire-resistant boards, 12.5 mm thick, 100 mm wide, as covering strips on CW double profiles with TN 3,5 x 25 alternating at clearances of ≤ 250 mm. Also attach covering strips, 40 mm or 50 mm wide to the UW perimeter runners / CW profiles.

Anchoring of the supporting UW perimeter runners with CW carrying channels

Anchoring substrate	Fastener		Maximum distance between fastener centres	
			D137.de mm	D134.de mm
Metal stud partitions (anchoring in metal studs or Flex Profiles)	2x Knauf Multi-Purpose Screws FN 4.3 x 35. Cladding thickness ≤ 20 mm		625	625
	2x Knauf Multi-Purpose Screws FN 4.3 x 65			
Reinforced concrete wall	Knauf Ceiling Steel Dowels		300	300
	Knauf Nailable Plug L 8/80			–
Stable masonry without cavities or light concrete (density ≥ 1000 kg/m³)	Knauf Nailable Plug L 8/80		300	–
	Fasteners and anchors suitable for the substrate		300 ¹⁾	–
	Non-combustible fasteners and anchors suitable for the substrate		–	300 ¹⁾
Other substrates	Fasteners and anchors suitable for the substrate		300 ¹⁾	–
	Non-combustible fasteners and anchors suitable for the substrate		–	300 ¹⁾

1) Minimum load-bearing capacity: Shear 0.35 kN.


With fire protection up to F30 and a room width ≤ 2.25 m, the number of screws can be halved or the spacing for the fasteners can be doubled.

Note Application and connection of the grid with free-spanning UA profiles in acc. with system data sheet [D13.de Knauf Free-Spanning Ceilings](#).


Connection to wall

Scheme drawings | Dimensions in mm

D137.de Free-Spanning Cleaneo Acoustic Board Ceiling

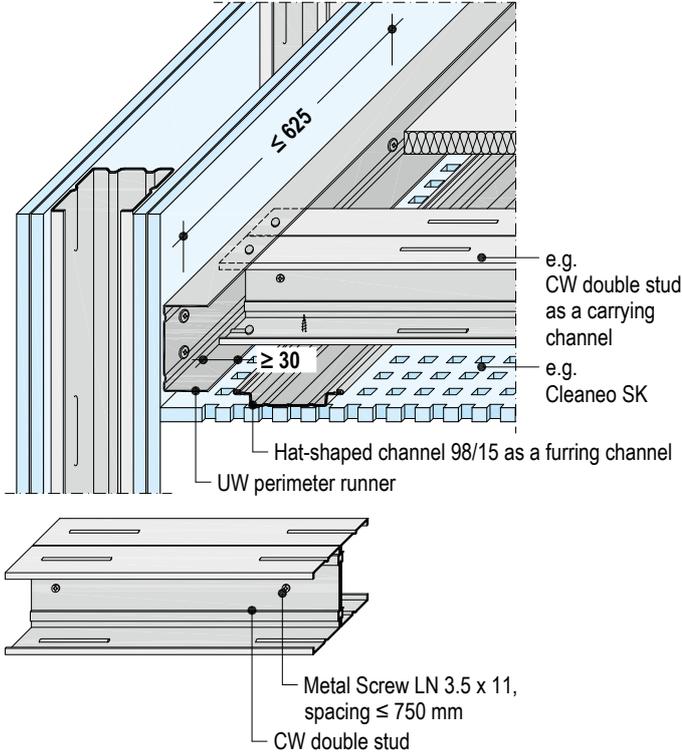

D134.de Free-Spanning Cleaneo Acoustic Fire Protection Ceiling

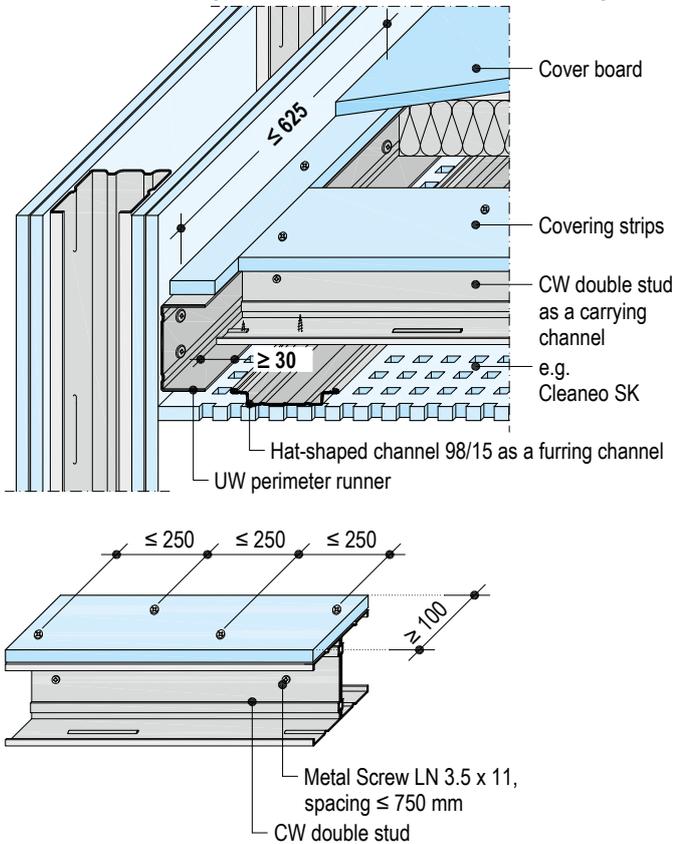






Note

The free-spanning carrying channels may not be joined or extended.

Application and connection of the grid with free-spanning UA profiles in acc. with system data sheet [D13.de Knauf Free-Spanning Ceilings](#).

Arrangement of the insulation layers

Scheme drawings

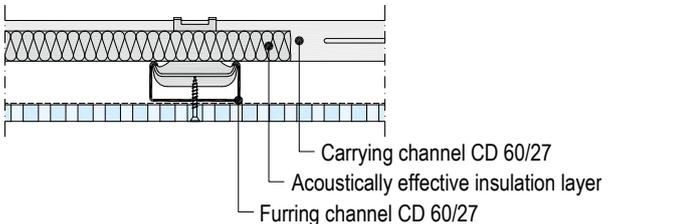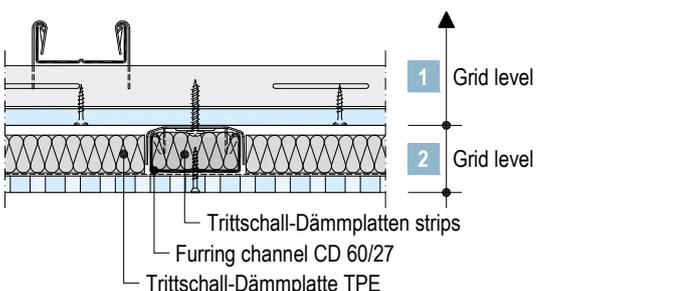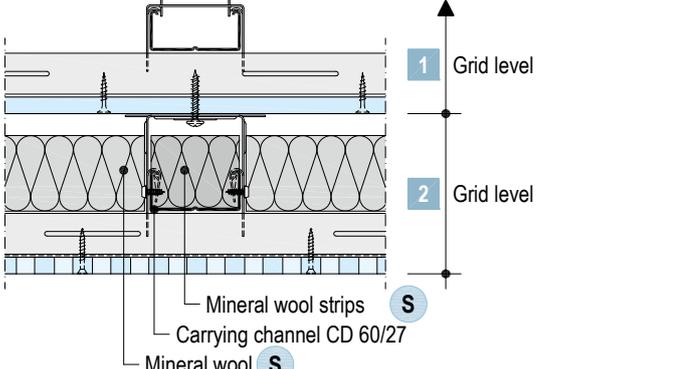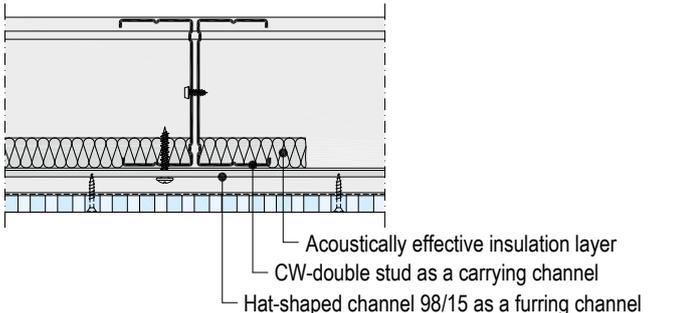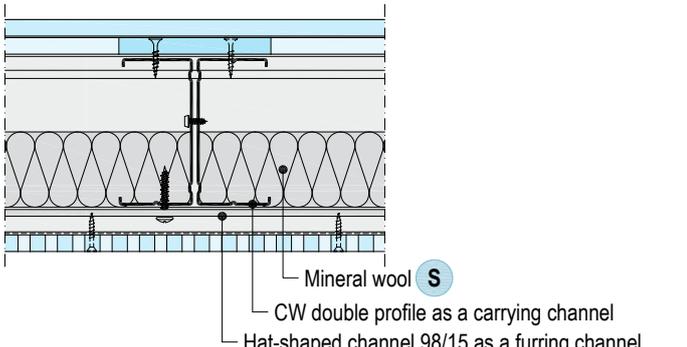Configuration	Insulation layer (see also page 36)
<p>D127.de/D126U.de</p>  <p>Carrying channel CD 60/27 Acoustically effective insulation layer Furring channel CD 60/27</p>	<p>Acoustically effective insulation layer: Lay the insulation layer on the furring channels.</p>
<p>D124.de</p>  <p>Grid level Grid level Trittschall-Dämmplatten strips Furring channel CD 60/27 Trittschall-Dämmplatte TPE</p>	<p>2nd grid level: Furring channels only – Direct Bracket Obligatory fire protection related insulation layer: Fill furring channels of the 2nd grid level with footfall sound insulation strips. Apply Trittschall-Dämmplatten TPE “directly” between the furring channels of the 2nd grid level.</p>
 <p>Grid level Grid level Mineral wool strips Carrying channel CD 60/27 Mineral wool S</p>	<p>2nd grid level: Carrying and furring channel – Universal Brackets Obligatory fire protection related insulation layer: Fill the carrying channels of the 2nd grid level with mineral wool S strips (the insulation material can be recessed in the intersection connector area). Apply mineral wool between the carrying channels (on the furring channels) of the S 2nd grid level.</p>
<p>D137.de</p>  <p>Acoustically effective insulation layer CW-double stud as a carrying channel Hat-shaped channel 98/15 as a furring channel</p>	<p>Acoustically effective insulation layer: Apply the insulation layer between the CW single profiles/CW double profiles (carrying channels).</p>
<p>D134.de</p>  <p>Mineral wool S CW double profile as a carrying channel Hat-shaped channel 98/15 as a furring channel</p>	<p>Obligatory fire protection related insulation layer: Apply mineral wool S between the CW double profiles (carrying channels)</p>

Top side covering layer

System D134.de (F30 solely from below and from above).


Apply a loose top covering layer laterally on the double profiles made of Knauf Piano Fire-Resistant Board 12.5 mm and overlap the longitudinal joints by at least 50 mm. Arrange the front edge joints at the centre of the CW double profiles.

Fastening of the cladding

Scheme drawings | Dimensions in mm

Fastening with screws		Fasteners – screw spacing 170 mm
Continuous perforation Cleaneo Classic <p>Front edge</p> <p>Longitudinal edge</p>	Screw fastening in the continuous perforation area: Countersunk screw SN 3.5 x 30 alternatively Contrapanel ceiling screw 3.5 x 25 (Cleaneo Complete)	
Non-perforated edge Cleaneo Classic <p>Front edge</p> <p>Longitudinal edge</p>	Screw fastening of non-perforated edge: Drywall screw TN 3.5 x 25 or Countersunk screw SN 3.5 x 30 alternatively Contrapanel ceiling screw 3.5 x 25 (Cleaneo Complete)	
Frieze <p>Front edge</p>	Screw fastening of non-perforated frieze: Drywall Screw TN 3.5 x 25 or Countersunk Screw SN 3.5 x 30 alternatively Contrapanel ceiling screw 3.5 x 25 (Cleaneo Complete)	

Additional screw fastening UD runner



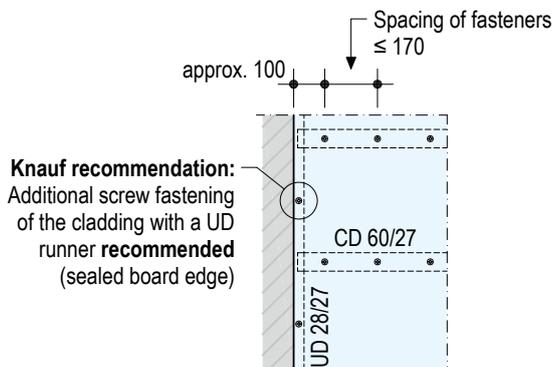


Note

D126U.de:
For installation of built-in such as e.g. access panels,
Thermoboard screws TB 3.5 x 23 mm at entire perimeter.

Fastening of the cladding

Scheme drawings

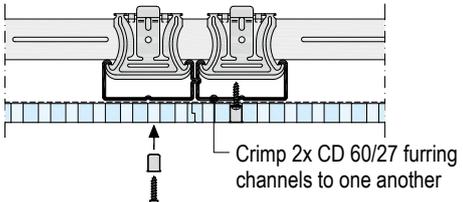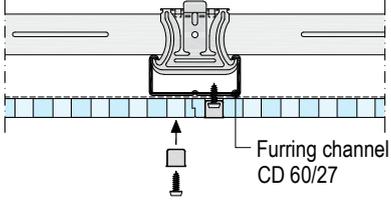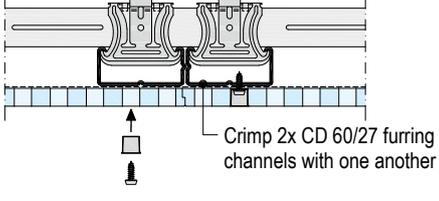
Fastening with Cleaneo Caps	Fasteners – screw spacing 170 mm
<p>Circular perforation 8/18 R</p>  <p>Crimp 2x CD 60/27 furring channels to one another</p>	<p>Cleaneo Cap 8R (with enclosed screws) Screw fastening on board joints in the second perforation row. Arrange two furring channels on the front edge joints and crimp them together.</p>
<p>Circular perforation 10/23 R or alternatively 12/25 R</p>  <p>Furring channel CD 60/27</p>	<p>Cleaneo Cap 10R (with enclosed screws) alternatively Cleaneo Cap 12R (with enclosed screws) Screw fastening on board joints in the first perforation row.</p>
<p>Square perforation 12/25 Q</p>  <p>Crimp 2x CD 60/27 furring channels with one another</p>	<p>Cleaneo Cap 12Q (with enclosed screws) Screw fastening on board joints in the second perforation row. Arrange two furring channels on the front edge joints and crimp them together). Not permissible with fire resistance requirements.</p>

Cleaneo Caps


- Fastening for Cleaneo Classic boards with perforations 8/18 R, 10/23 R, 12/25 R and 12/25 Q
- Optically matched to the perforation design
- Concealed installation
- Filling the screws is no longer required

Notes	<p>Can be used with ball impact safety.</p> <p>Can only be used at normal room climatic conditions.</p> <p>Not permissible with system D126U.de</p> <p>The relative air humidity of the room may only briefly exceed a level of 65 %.</p> <p>For detailed information relating to installation of Cleaneo linear boards, see installation guide K761L-A01.</p> <p>For further information see product data sheet K533.de Knauf Cleaneo Caps.</p>
-------	--


1) Insert the Cleaneo Cap flush

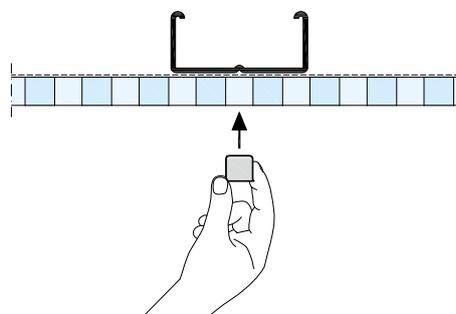

2) Insert the enclosed screw

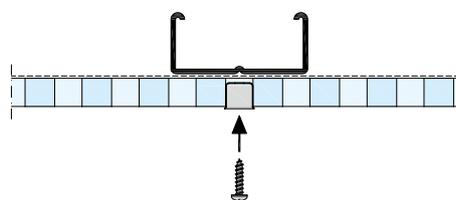

3) Screw fix the screw to the furring channel

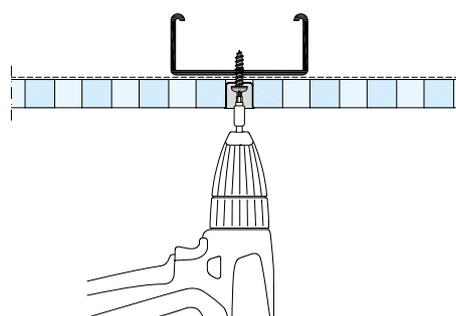


Board arrangement

Examples: Cleaneo SK


Rooms up to approx. 150 m²:

1st board row: Start application in the middle of the room
Install the remaining board rows: parallel to 1st row

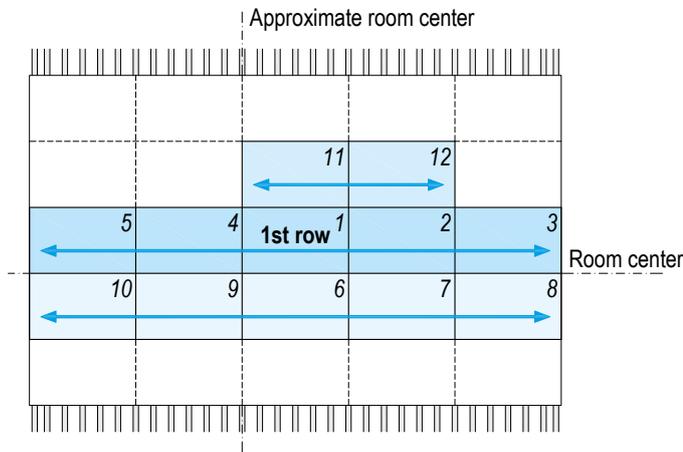

Rooms from approx. 150 m²:

1st board row: Start application in the middle of the room
2nd board row: transverse to 1st row – commence approx. in room centre
Remaining ceiling surface: Install after application of 1st and 2nd row

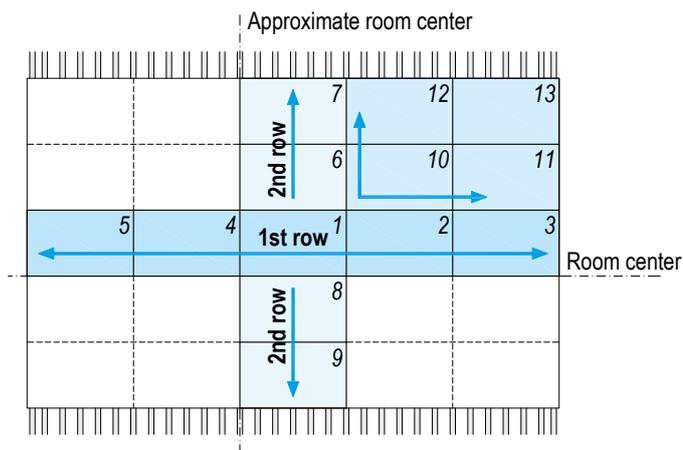

Scheme drawings

Installation schemes

There is a department at Knauf that works with case related computer-aided installation plans. The installation plans are created with a scale of 1:50 showing all required details. The production is geared according to the demands of these plans. Each individual board is numbered on the rear with the corresponding number on the installation plan. For application speed, we recommend preparation of the layouts as installation blueprints in scale 1:50 in DXF or DWG file format.

Required planning specifications:

- Type of cladding
- Perforation type: Standard perforation R / alternating perforation R / square perforation Q / block perforation / slotline
- Separations (e.g. as exposed joints) within a room, particularly when planning segments with continuous perforation
- Ball impact safety according to DIN 18032-3/ DIN EN 13964 appendix D
- Fire protection requirements if required
- Fleece colour: White / black / customized colour
- Perimeter: Non-perforated board edges specifying the width acc. to page 24 and page 25
- Perimeter design of the room with/without shadow gap; width specification
- Frieze: Structure and width
- Frieze application on-site or prefabricated
- In case of perimeter shadow gaps, prefabricated frieze is available in standard widths starting at 50 mm.

Notes

Observe the installation guides for the respective boards ([K761S-A01.de](#) / [K761U-A01.de](#) / [K761L-A01.de](#)).

For Cleaneo Complete, cleaning of the ceiling after installation must be taken into consideration.

Recommendation **Cleaneo UFF plaster base board**: Use entire boards only. Cut the boards only in the non-perforated area between the blocks.

Random perforation R: From some angles and unfavourable lighting conditions it is possible that the effect of a continuous perforation is hindered by the long edge joints.

Depending on the incidence of light/refraction, the impression of the furring channel may be visible with a white acoustical fleece in conjunction with perforations of a diameter ≥ 15 mm.

Jointing

Suitable jointing materials

- Uniflott:
 - Hand fill without using joint tape with Cleaneo Classic boards and Feuerschutzplatten Knauf Piano fire-resistant boards.

Jointing of the gypsum boards

Fill the board joints of Cleaneo Classic boards according to the table below to suit the edge type concerned.

Generally fill in visible screw heads (except with Cleaneo Complete Contrapanel ceiling screws with white screw heads).

Fill the board joints with filling compound with Knauf Piano fire-resistant boards (fire protection level system D124.de).

Joint filling of the connection joints

Frieze application is generally recommended for Cleaneo Classic boards with continuous perforation.

Apply Trenn-Fix or Fugendeckstreifen Kurt joint tape when filling joints to adjacent drywall constructions, taking into consideration the conditions and requirements for crack safety.

Observe code of practice no. 3 "Gipsplattenkonstruktionen - Fugen und Anschlüsse" (German only)¹⁾.

Apply Trenn-Fix when filling joints to adjacent solid or wooden construction components.

Application temperature / climate

Filling and covering of joints should only take place when no more longitudinal changes can be expected, i.e. expansion or contraction due to humidity or temperature changes.

Do not apply filling at room or substrate temperatures below approx. +10 °C.

In case of mastic asphalt screed, cementitious screed and self-levelling screed, fill in board joints after screed has been applied.

Observe code of practice no. 1 "Baustellenbedingungen"¹⁾.

1) Issued by the German Bundesverband der Gipsindustrie e. V.

Jointing of gypsum board joints of Cleaneo Classic boards

Edge designs	Application and joint filling	Frieze made of non-perforated board strip
4SK 4-sided cut square edge 	<ul style="list-style-type: none"> ■ Scuff the board edges on the face side with a sanding mesh and remove the dust ■ Prime the cut edge (SK) with Knauf Tiefengrund primer ■ Align the boards according to perforation design ■ Fill the joints fully with Uniflott 	<ul style="list-style-type: none"> ■ Scuff the edges of the sharp cut board strips (SK) on the face side with sanding mesh ■ Prime the cut edges with Knauf Tiefengrund primer ■ Install the board with a joint of 3-4 mm ■ Fill the joints fully with Uniflott
UFF surrounding notch joint 	<ul style="list-style-type: none"> ■ Butt join the boards ■ Align the boards according to perforation design ■ Fill the joints fully with Uniflott 	<ul style="list-style-type: none"> ■ Scuff the edges of the sharp cut board strips (SK) on the face side with sanding mesh ■ Prime the cut edges with Knauf Tiefengrund primer ■ Install the board with a joint of 3-4 mm ■ Fill the joints fully with Uniflott
linear Circumferential rebated edges 	<ul style="list-style-type: none"> ■ Butt join the boards ■ Align the boards according to perforation design ■ Fill screw heads, for example, with Uniflott 	<ul style="list-style-type: none"> ■ Scuff the edges of the sharp cut board strips (SK) on the face side with sanding mesh ■ Prime the cut edges with Knauf Tiefengrund primer ■ Install the board with a joint of 3-4 mm ■ Fill the joints fully with Uniflott ■ Alternative: (without jointing) non-perforated edge frieze Cleaneo linear
AK 4-sided tapered edge 	<ul style="list-style-type: none"> ■ Butt join the boards ■ Align the boards ■ Fill the joints with Uniflott ■ Fugendeckstreifen Kurt joint tape 	<ul style="list-style-type: none"> ■ Use board strips with tapered long edge (AK) ■ Butt join the boards ■ Jointing with Uniflott ■ Fugendeckstreifen Kurt joint tape
SFK Front edge bevelled 	<ul style="list-style-type: none"> ■ Prime the cut edges with Knauf Tiefengrund primer ■ Butt join the boards ■ Align the boards ■ Fill the joints completely with Uniflott 	<ul style="list-style-type: none"> ■ Scuff the board strips on the face side with a sanding mesh ■ Install the board with a joint of 3-4 mm ■ Prime the cut edges with Knauf Tiefengrund primer ■ Jointing with Uniflott
HRK Half-rounded long edge 	<ul style="list-style-type: none"> ■ Butt join the boards ■ Align the boards ■ Fill the joints completely with Uniflott 	<ul style="list-style-type: none"> ■ Use board strips with half-rounded edge (HRK) or half-rounded tapered edge (HRAK) ■ Butt join the board edges ■ Jointing with Uniflott

Coatings and linings

Pretreatment

Before further coating is applied, the filled surface must be free of dust. Gypsum board surfaces should always be primed in compliance with the Code of Practice no. 6 of the BVG (IGG) "Vorbehandlung von Trockenbauflächen aus Gipsplatten zur weitergehenden Oberflächenbeschichtung bzw. -bekleidung."¹⁾ (German only) - issued by the German Bundesverband der Gipsindustrie e. V.

The primer must suit the subsequent paints or coatings.

In order to compensate for the differences in absorption of surfaces, coatings of primer such as Knauf Tiefengrund primer is suitable.

Note

Gypsum board surfaces that have constantly been exposed to light without any protection can cause yellowing after coating. Therefore, a trial coat is recommended that will extend across several boards including all joints. Yellowing can, however, be successfully avoided only by using a special primer, such as Knauf Sperrgrund barrier coating.

Suitable coatings

The following coatings can be applied on Cleaneo Classic boards:

- Decorative coats
 - Dispersion paint (e.g. Intol E.L.F., Malerweiss E.L.F.)
 - Multicoloured (rainbow) emulsion
 - Silicate-based emulsion paints with suitable primer.

Note


Use a short-hair lambskin roller to prevent paint from entering the perforations and negatively impacting the acoustical effectiveness of the fleece.

Unsuitable coatings

- Alkaline coats such as lime, water glass paints and silicate-based paints.

Acoustical plaster

System D126U.de with Cleaneo Acoustic UFF plaster base board with fleece or foil lamination on the rear side:

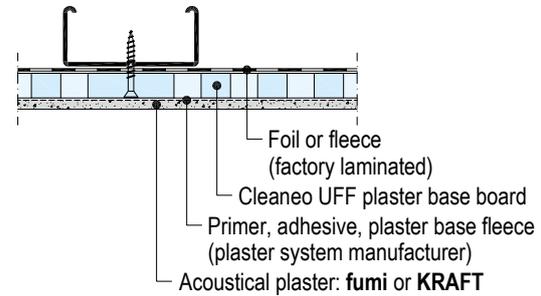

The face side fleece incl. adhesive is supplied by the acoustical plaster supplier and glued on at the installation site to apply the top layer

Notes

- Observe the specifications of the plaster manufacturer relating to pretreatment and application.
- After application of plasters, quick drying must be ensured through adequate airing.

Material requirement per m² ceiling without allowance for loss and waste

Selected examples

Description	Unit	Quantity as average value		
		D127.de	D124.de	D126U.de
		1	2	3
Connection to wall Backing as required – Observe fire protection requirements				
Knauf Profile UD 28/27	m	0.4	0.8	0.4
<i>Angle Profile</i>	m	–	–	–
<i>KRAFT edge connection bracket</i>	m	–	–	–
Suitable anchors, e.g. Knauf Deckennagel ceiling steel dowels with reinforced concrete	pcs	0.4	0.8	–
Grid				
Suitable anchors, e.g. Knauf Deckennagel ceiling steel dowels with reinforced concrete	pcs	1.2	1.8	1.2
Knauf Universal Bracket / Damping Universal Bracket for CD 60/27 2x Knauf Metal Screws LN 3.5 x 11	pcs	1.2	1.8	1.2
	pcs	2.4	3.6	2.4
Alternative Knauf Adjustable Universal Brackets (incl. 2x pins)	pcs	1.2	1.8	1.2
Alternative Knauf Nonius hanger top + Nonius hanger bottom + Nonius splint	pcs	1.2	1.8	1.2
Alternative Knauf Nonius hanger top + Nonius stirrup for CD 60/27 + Nonius splint	pcs	1.2	1.8	1.2
2nd grid level Knauf Multi-Purpose Screw FN 4.3 x 35	pcs	–	2	–
	pcs	–	2	–
	pcs	–	4	–
Knauf Profile CD 60/27	m	4.3	8.2	3.7
Knauf CD Longitudinal Connector	pcs	0.9	1.6	0.7
Knauf Intersection Connector for CD	pcs	3.7	7.2	2.9
	Alternative 2x Knauf Ankerwinkel Clip	pcs	7.4	14.4
Insulation layer Observe sound absorption / fire protection requirements				
<i>Insulation layer, e.g. Knauf Insulation</i>	m ²	1	1	1
Knauf boards Type and thickness, see the system examples page 85				
Cleaneo Classic	m ²	1	1	1
Feuerschutzplatte Knauf Piano fire-resistant board, 12.5 mm	m ²	–	1	–
Fastening Fastening of the boards – Knauf fasteners see page 79				
Cleaneo Classic	pcs	24	24	21
Feuerschutzplatte Knauf Piano fire-resistant board, 12.5 mm	pcs	–	20	–
Frieze	pcs	as req.	as req.	as req.
Jointing Consumption quantities of the diverse filling compounds, refer to the product data sheets of the relevant Knauf products				
Knauf filling compound (dependent on the board edge type, see page 82)				
1st grid level	Knauf filling compound, e.g. Uniflott			
Trenn-Fix, 65 mm wide, self-adhesive				
Acoustical plaster system Use products and lining/coating according to manufacturer's specifications, see page 12				
<i>fumi Akustikputz (Schmidt Akustik GmbH)</i>	m ²	–	–	•
<i>KRAFT Akustikputz (KRAFT Akustik-Systeme)</i>	m ²	–	–	•

Legend:

as req. = as required

• Specifications according to manufacturer

Material not provided by Knauf = printed in italics

The amounts refer to a ceiling area of 10 m x 10 m = 100 m²

Note Material requirement without consideration of the frieze application.

Material requirement per m² ceiling without allowance for loss and waste – (continued)

Description	Unit	Quantity as average value		
		D127.de 1	D124.de 2	D126U.de 3
Joining Consumption quantities of the diverse filling compounds, refer to the product data sheets of the relevant Knauf products				
Knauf filling compound (dependent on the board edge type, see page 82)	kg	as req.	as req.	as req.
<i>1st grid level</i> Knauf filling compound, e.g. Uniflott	kg	–	0.3	–
Trenn-Fix, 65 mm wide, self-adhesive	m	0.4	0.4	0.4

Legend:

as req. = as required

• Specifications according to manufacturer

Material not provided by Knauf = printed in italics

System examples for material estimation


System	D127.de 1	D124.de 2		D126U.de 3
		1st grid level	2nd grid level with Universal Bracket	
Knauf boards	Cleaneo SK	Feuerschutzplatte Knauf Piano fire-resistant board	Cleaneo SK	Cleaneo UFF Plaster base board fleece
Board thickness	12.5 mm	12.5 mm	12.5 mm	12.5 mm
Load class up to	0.15 kN/m ²	–	–	0.15 kN/m ²
Spacing of suspenders	1000 mm	650 mm	800 mm	950 mm
Carrying channel axial spacing	900 mm	800 mm	800 mm	1000 mm
Axial spacing of furring channel	333.3 mm	400 mm	333.3 mm	400 mm

Note

Products (examples) for further construction types:

- Fastening with Cleaneo Caps, see page 80, if necessary with divergent furring channel design
- Frieze application with design units, cut-to-length and additional grids if required

Example of material estimation with D127.de

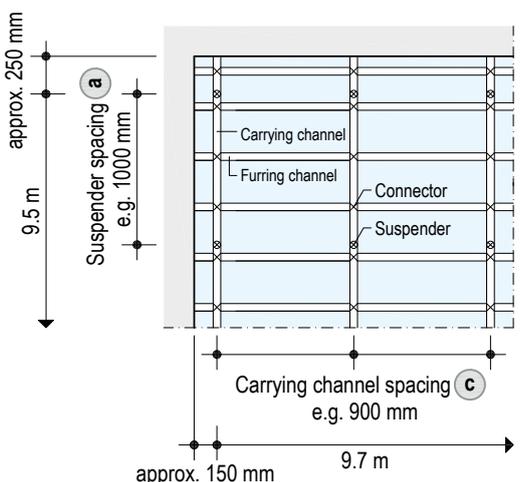

Carrying channel

$$\frac{9.7 \text{ m}}{\text{a}} + 1 \text{ pc}$$

$$\frac{9.7 \text{ m}}{0.9 \text{ m}} + 1 \text{ pc} = 12 \text{ pcs}$$

$$12 \text{ (carrying)} \times 10 \text{ m} = 120 \text{ m}$$

Suspender

$$\frac{9.5 \text{ m}}{\text{a}} + 1 \text{ pc}$$

$$\frac{9.5 \text{ m}}{1 \text{ m}} + 1 \text{ pc} = 11 \text{ pcs}$$

$$12 \text{ (carrying)} \times 11 \text{ pcs} = 132 \text{ pcs}$$

Furring channel

$$\frac{10 \text{ m}}{\text{b}} + 1 \text{ pc}$$

$$\frac{10 \text{ m}}{0.33 \text{ m}} + 1 \text{ pc} = 31 \text{ pcs}$$

$$31 \text{ (furring)} \times 10 \text{ m} = 310 \text{ m}$$

Connector

$$\text{Carrying pcs} \times \text{furring pcs}$$

$$12 \text{ (carrying)} \times 31 \text{ (furring)} = 372 \text{ pcs}$$

Material requirement per m² ceiling without allowance for loss and waste

Selected examples

Description	Unit	Quantity as average value	
		D137.de 4	D134.de 5
Connection to wall			
Knauf UW runner	m	0.8	0.8
Suitable fastener material, e.g.			
Knauf Multi-purpose Screw FN with Metal Stud Partition	pcs	2.7	2.7
Alternative Knauf Deckennagel ceiling steel dowel with reinforced concrete	pcs	2.8	2.8
Covering strips 40 mm wide: Feuerschutzplatte Knauf Piano fire-resistant board; 12.5 mm	m ²	–	0.05
Knauf CW profile	m	0.2	0.2
Suitable fastener material, e.g.			
Knauf Multi-purpose Screw FN with Metal Stud Partition	pcs	as required	as required
Alternative Knauf Deckennagel ceiling steel dowel with reinforced concrete	pcs	as required	as required
Covering strips 50 mm wide: Feuerschutzplatte Knauf Piano fire-resistant board; 12.5 mm	m ²	–	0.05
Grid			
Knauf CW single profile	m	1.9	–
e.g. Knauf metal screws LN 3.5 x 11 (connection of CW profile with lateral UW perimeter runner)	pcs	3.2	–
Alternative Knauf CW double profile	m	3.8	3.8
Knauf Metal Screw LN 3.5 x 11 (CW profiles screwed at flange)	pcs	3	3
Knauf metal screws LN 3.5 x 11 (connection of CW profile with lateral UW perimeter runner)	pcs	6.4	3.2
Covering strips 100 mm wide: Feuerschutzplatte Knauf Piano fire-resistant board; 12.5 mm	m ²	–	0.20
Knauf drywall screw TN 3.5 x 25 (covering strip fastening, see page 77)	pcs	–	13
Knauf hat shaped channel 98/15 as a furring channel	m	3.2	3.2
2x Knauf multi-purpose screw FN 4.3 x 35 (connection of hat-shaped channel with CW profile)	pcs	14	14
Insulation layer Observe sound absorption / fire protection requirements			
<i>Insulation layer, e.g. Knauf Insulation</i>	m ²	as required	1
Knauf boards Type and thickness, see the system examples page 87			
Cleaneo Classic	m ²	1	1
Cover board: Feuerschutzplatte Knauf Piano fire-resistant board, 12.5 mm	m ²	–	1.05
Fastening Fastening of the boards, Knauf fasteners see page 79			
Cleaneo Classic	pcs	25	25
Frieze	pcs	as required	as required
Jointing Consumption quantities of the diverse filling compounds, refer to the product data sheets of the relevant Knauf products			
Knauf filling compound (dependent on the board edge type, see page 82)	kg	as required	as required
Trenn-Fix, 65 mm wide, self-adhesive	m	1	1
Fugendeckstreifen Kurt joint tape	m	as required	as required

Legend

Material not provided by Knauf = printed in italics

The amounts refer to a ceiling area of 2.5 m x 10 m = 25 m².

Note	Material requirement without consideration of the frieze application.
-------------	---


System examples for material estimation

System	D137.de 4	D134.de 5
Knauf boards	Cleaneo SK	Cleaneo SK Knauf Piano fire-resistant board (cover board)
Board thickness	12.5 mm	12.5 mm 12.5 mm
Carrying channel axial spacing (CW single profile / CW double profile)	500 mm	500 mm
Axial spacing of furring channel (Hat-shaped channel 98/15)	333.3 mm	333.3 mm

Note Products (examples) for further construction types:

- Free-spanning UA profiles, L connection / T connection, centre suspension – see system data sheet [D13.de Knauf Free-Spanning Ceilings](#)
- Frieze application with design units, cut-to-length and additional grids if required

Example of material estimation with D137.de (CW single profile)

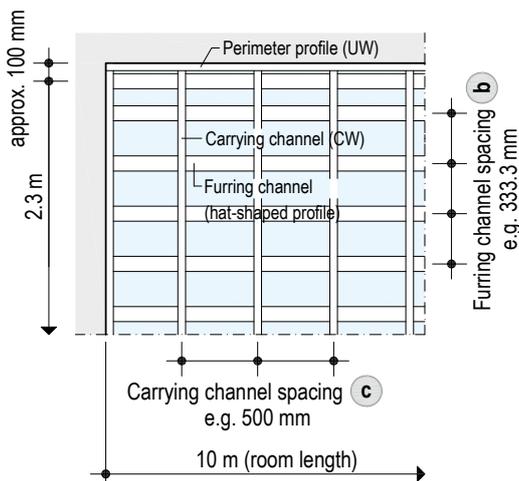

Carrying channel

$$\frac{10 \text{ m}}{0.5 \text{ m}} + 1 \text{ pc} = \text{c}$$

$$\frac{10 \text{ m}}{0.5 \text{ m}} + 1 \text{ pc} = 21 \text{ pcs}$$

$$21 \text{ (carrying channel)} \times 2.5 \text{ m} = 52.5 \text{ m}$$

Furring channel

$$\frac{2.3 \text{ m}}{0.333 \text{ m}} + 1 \text{ pc} = \text{b}$$

$$\frac{2.3 \text{ m}}{0.333 \text{ m}} + 1 \text{ pc} = 8 \text{ pcs}$$

$$8 \text{ (furring channel)} \times 10 \text{ m} = 80 \text{ m}$$

Information on the sustainability of Cleaneo Acoustic Board Ceilings

Building assessment systems ensure the sustainable quality of buildings and constructional structures by a detailed assessment of ecological, economic, social, functional and technical aspects.

In Germany, the following certification systems are of particular relevance:

- **DGNB System**
German seal of approval for environmentally sustainable building from the DGNB (German association for environmentally sustainable building)
- **BNB**
(Bewertungssystem Nachhaltiges Bauen - Quality rating system for environmentally sustainable building)
- **LEED**
(Leadership in Energy and Environmental Design).

Knauf products and Knauf Cleaneo Acoustic Board Ceilings can positively influence many of these criteria.

DGNB/BNB

Ecological quality

- **Criterion: Risks for the local environment**
The relevant environmental data are contained in the EPD for gypsum products

Economic quality

- **Criterion: Building related life-cycle costs**
Cost-effective Knauf Drywalling

Sociocultural and functional quality

- **Criterion: Acoustical comfort**
Knauf drywalling systems with high-performance absorption

Technical quality

- **Criterion: Fire resistance**
Comprehensive fire resistance know-how
- **Criterion: Sound insulation**
Exceeding the demands of the standard with Knauf sound protection
- **Criteria: Ease of dismantling and recycling**
Knauf Drywalling is fully compliant

LEED

Materials and Resources

- **Credit: Recycled Content**
Recycled content in Knauf boards, e.g. FGD gypsum
- **Credit: Regional Materials**
Short transport routes provided by the extensive network of Knauf manufacturing facilities



Videos for Knauf systems and products can be found under the following link:

www.youtube.com/knauf



The Knauf Infothek App now provides all the current information and documents from Knauf Gips KG at any time and in every location in a clear and comfortable way.

[Knauf Infothek](#)

Knauf Direct

Technical Advisory Service:

▶ knauf-direkt@knauf.com

▶ www.knauf.de

Knauf Gips KG Am Bahnhof 7, 97346 Iphofen, Germany

All technical changes reserved. Only the current printed instructions are valid. The stated information represents current state-of-the-art Knauf technology. The entire state of approved engineering rules, appropriate standards, guidelines, and rules of craftsmanship are not included herewith. These and all application instructions have to be adhered to separately by the installer. Our warranty is expressly limited to our products in flawless condition. All application quantities and delivery amounts are based on empirical data that are not easily transferable to other deviating areas.

All rights reserved. All amendments, reprints and photocopies, including those of excerpts, require our expressed permission.