


Nanoclass FFU Select

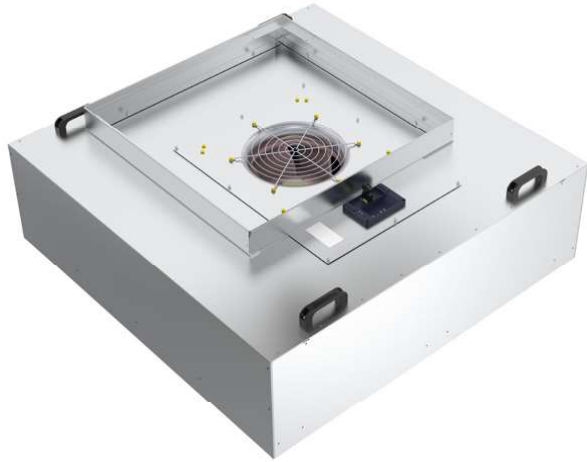

For proven and reliable performance

- Dimensions for all standard grid sizes
- Other dimensions available
- Provided with and without a prefilter frame
- Light weight filter fan unit
- Available for digital (Modbus RTU) and analog (0-10V) control
- Modbus DCI available
- Low energy consumption
- Lowest noise emission in it's class
- Designed for long-lasting and stable performance

Grid size	Dimensions (mm)			Prefilter frame (mm)			Connection & control		Weight (kg)	Air volume (m³/h)	Noise emissions (dBA)*
	W	H	D	W	H	D	MODBUS RTU/0-10V	Wieland plug			
1212	1162	1162	350	750	750	80	✓	Included	29.5	2220	51
	1132	1132	350						29		
0912	862	1162	350	750	750	80	✓	Included	26	1650	47
	832	1132	350						25.5		
0909	862	862	350	500	500	80	✓	Included	22.5	1230	45
	832	832	350						22		
0612	562	1162	350	500	500	80	✓	Included	20.5	1100	44
	532	1132	350						20		
0609	562	862	350	500	500	80	✓	Included	18	800	45
	532	832	350						17.5		
0606	562	562	350	380	450	80	✓	Included	12.5	530	47
	532	532	350						12		

*ePM10 50% and HEPA H14, 0.45 m/s at 1.5 m