

180982- Toba Mono mixer

| Useful Information | | | | |
|----------------------------|---------|--|--|--|
| Minimum operating pressure | 0.2 bar | | | |
| Maximum operating pressure | 5 bar | | | |
| Guarantee length | 5 years | | | |

Technical Diagram

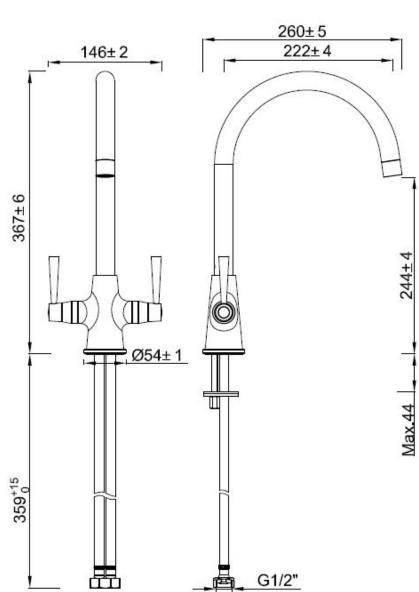

Exploded Diagram

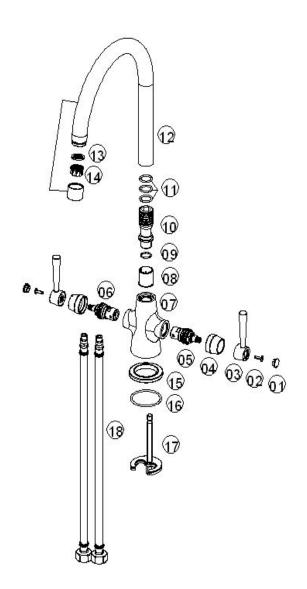

| Item Number | Supplier Ref | Description | Quantity | Spares Available |
|-------------|--------------|---------------|----------|---------------------|
| 1 | P97-A | Indice | 2 | Yes |
| 2 | SC4-12S/B | Screw | 2 | Yes |
| 3 | 177011-H | Handle | 2 | Yes |
| 4 | 177011-S | Valve Cover | 2 | Yes |
| 5 | VS02-C20 | 1/2" CD Valve | 1 | Yes |
| 6 | VS02-C20 | 1/2" CD Valve | 1 | Yes |
| 7 | 177011-01 | Tap Body | 1 | No |
| 8 | 177005-N2 | Block Ring | 1 | Yes |
| 9 | OR109 | O Ring | 1 | No |
| 10 | 177005-N1 | Adaptor | 1 | No |
| 11 | OR101 | O ring | 3 | Yes |

| 12 | 177005-02 | Spout | 1 | No |
|----|----------------|--------------------|---|-----|
| 13 | A14-01X | Washer | 1 | Yes |
| 14 | A13-02 | Flow straightener | 1 | Yes |
| 15 | N30-G | Flange | 1 | Yes |
| 16 | N25-G | Washer | 1 | Yes |
| 17 | N28-M | Fixing kit | 1 | Yes |
| 18 | BZG10-1/2"-400 | Braided Connectors | 1 | Yes |

Flow Rates

<u>FAQ</u>

What should I do if my tap is dripping/leaking?

Cleaning the valve (if water dripping from tap)

Before carrying out any maintenance, turn off the mains water supply. If unsure contact a qualified tradesman.

- 1. Remove the cap (e), grub screw (a), handles (b).
- 2. Remove the valve (d) using a suitable spanner, clean thoroughly under cold water
- 3. to remove any build up of limescale or debris.
- 4. If necessary replace the valve.
- 5. Replace the valve (d) into the body, tighten the valve using a suitable spanner.
- 6. Replace the handles (b) and indice (f), tighten the grub screw (a).
- 7. Re-fit the cap (e) to handle.

What does the Guarantee Cover?

The Guarantee Covering leakage, manufacturing defects and Chrome Plating The guarantee does not cover:

• Damage or defects caused by:

- general wear and tear (including special non-chrome finishes;
- components such as filters, seals, 'O'rings and washers)
- incorrect installation
- repair using non- PPI parts
- accidental or wilful misuse
- corrosion and the use of inappropriate cleaning products.
- system debris including the build up of limescale (which can be controlled through regular servicing and maintenance).
- Compensation for loss of use of the product or consequential loss of any kind.