

TOILET SEAT INSTALLATION INSTRUCTIONS

Please read carefully before attempting to fit the seat. If you are not the end user, please make sure the aftercare instructions are made available for the end user to read.

1) USE THIS CHECKLIST TO ENSURE ALL PARTS ARE ACCOUNTED FOR AND NOT DAMAGED.


Under no circumstances should this product be installed if any of the parts are damaged or missing. In the unlikely case that there are any installation issues, please contact your point of purchase.

Tools Required: Allen Key(10) and Plastic Spanner(11)

Item	Description	Qty
1	Toilet Seat with Cover	1
2	Metal soft close hinge	2
3	Metal Screw Bolt	2
4	Plastic Washer(Large)	2
5	Plastic Wingnut	2
6	Plastic Washer	2
7	Metal Washer	2
8	Metal nut	2
9	Pan(Not Supplied)	1
10	Allen Key	1
11	Plastic Spanner	1



2) FITTING THE HINGE COMPONENTS.

Place the Plastic Wingnut (5) into the small holes in the toilet pan(9). Thread the Metal Screw Bolt(3) into the hole on the hinge(2). Put the Plastic Washer(4) through the Metal Screw Bolt(3) and then put through the Plastic Wingnut (5) in the WC Pan. The Metal Screw Bolt(3) comes out under the Pan. Put the Plastic Washer(6) and Metal Washer(7) in sequence and at last use the plastic spanner(11) to tighten the Metal Nut(8) onto the Metal Screw Bolt(3).
NOTE: Do not tighten fully at this stage as some adjustment may be required.

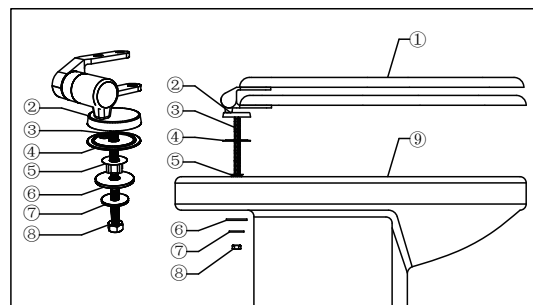

3) FITTING THE TOILET SEAT.

There are three holes in the bottom of the hinge(2). For the left two holes, it can be adjusted forwards/backwards and from side to side with the Metal Screw Bolt(3). For the third hole on the right which called pre-fixed screw, you can use the Allen Key(10) to loose or tighten it. Provisionally tighten the Metal Screw Bolt(3) into either one of left two holes on the hinge(2), adjust the toilet seat(1) to align with the pan(9). Once you have the desired position, pull out the toilet seat from the pan and fix the Metal Screw Bolt(3) into the proposed hole on the hinge(2) and also fully tighten the pre-fixed screw with the Allen Key(10), then secure the seat onto the WC Pan according to the order of fitting installation above.

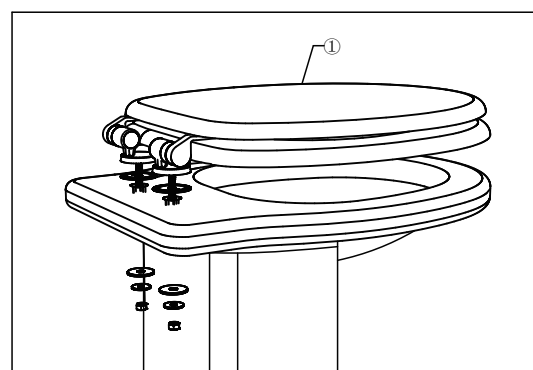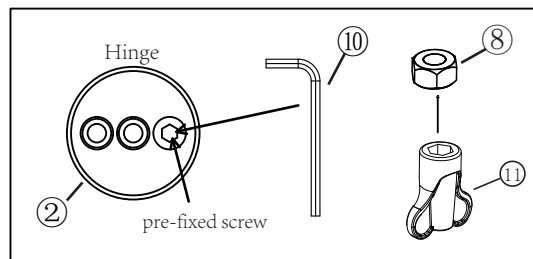

Cleaning and Maintenance

Regular cleaning with a soft damp cloth and mild detergent solution is recommended.

We have taken great care to ensure that this product reached you in perfect condition. However, should any parts be damaged or missing, please contact your point of purchase. This does not affect your statutory rights. In addition if you require any replacement parts your point of purchase will be happy to assist.

Guarantee-2years

